



Stainless steel cabinet construction

Stainless steel interior and exterior (galvanized steel back & bottom).



Temperature range between 33°F ~ 39°F

Air guard on rear wall ensures proper air circulation and cooling.



Hydrocarbon refrigerants (R-290)

Increases energy HFC refrigerants. It is safer for the environment and does not cause ozone depletion.





Cabinet Dimensions (inches/mm)

L Н 67" 36 1/2" 42" 1702 mm 929mm 1066mm

> Weight (lbs/kg)

Net Weight 390 lbs 176 kg

Ship Weight 419 lbs 190 kg







Cabinet construction


- Cyclopentane Insulation Contains no hydro-fluorocarbons (HFCs) and is environmentally friendly.
- Epoxy coated wire shelves with adjustable shelving height.
- Drop-in section: Fans force cold air into this enclosed area keeping stred food items consistently cold
- Insulated pan cover with a stainless steel divider which prevents food spillage into the storage area beneath
- Standard 1/6 / 4" food pans are provided. Unit accommodates 6" deep pans (pans are not inclueded)
- Side rail cutting board bracket with 9 $\frac{1}{2}$ " deep, $\frac{1}{2}$ " thick cutting board included
- Four 4" Diameter swivel casters with front brakes standard.

Refrigeration

- Self-contained system, rear mounted compressor.
- Electrodeposition coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- Innovative hot gas frame heating system reduces condensation and increases energy.

Front view 1702 [67] 1083 [42 5/8] 553 [21 3/4] [8/5 51] [8/5 51] 8/6 [1] 8/7 51] 8/7 51] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1] 8/8 [1]

929 [36 1/2] 831 [32 3/4] [7/1 LE] P6Z 760 [29 7/8]

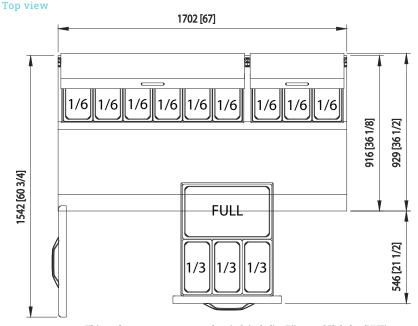



WWW. GWA Infligscagov.

- Ce produit peut vous exposer á des agents chimiques incluant le Diisononyl

- Phthalate(DINP), reconnu par l'Esat de Californie comme causant le cancer, Pour de plus

amples renseignements, consulter le site www.P65Wamings.ca.gov.

Doors

- · Self-closing doors
- Durable door gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal door handles. (Ni-Cr Plated)
- Door designed to open easily.

Design & Features

- Self-diagnostic digital temperature control & monitor system.
- · Digital display allows for easy monitoring.
- Digital controls include automatic evaporator fan motor delay
- Rounded corner design gives a stylish appearance and reduces chances of injury.
- Visual and audible door open alarm, alarm sounds when doors are not completely closed to protect against food spoilage

Optional Features & Accessories

- 2.5" diameter casters available.
- 6" adjustable legs available.
- · Additional shelves are available.

Door	1
Drawer	2
Capacity Cu.Ft.	20.2
Shelves	4
Refrigerant	R-290
Temperature Range	33°F ~ 39°F
Easy Maintenance	Sliding Condensing Unit
Connection	9.8 ft long (3m) flexible three wire cord with modeled plug
HP	3/8
Voltage	115V/60Hz
Amps	3.5
NEMA Config.	NEMA 5-15



Blue Air has right to change specifications without further notice.







