BLUENIX MODEL BAPP93-HC PIZZA PREPTABLES





Stainless steel cabinet construction Stainless steel interior and exterior (galvanized steel back & bottom).

Temperature range between 33°F ~ 39°F

Air guard on rear wall ensures proper air circulation and cooling.



Hydrocarbon refrigerants (R-290) Increases energy HFC refrigerants. It is safer for the environment and does not

safer for the environment and does not cause ozone depletion.



Cabinet Dimensions (inches/mm)				
L		D	Н	
93 1/4" 2370 mm		1/2″ mm	42″ 1066 mm	
Weight (lbs/kg)				
Net Weight 452 lbs 205 kg		Ship Weight 492 lbs 223 kg		






Cabinet construction


- Cyclopentane Insulation Contains no hydro-fluorocarbons (HFCs) and is environmentally friendly.
- Epoxy coated wire shelves with adjustable shelving height.
- Drop-in section : Fans force cold air into this enclosed area keeping stred food
 items consistently cold
- Insulated pan cover with a stainless steel divider which prevents food spillage
 into the storage area beneath
- Standard 1/6 / 4" food pans are provided. Unit accommodates 6" deep pans
- Side rail cutting board bracket with 9 ½" deep, 1/2" thick cutting board included
- Four 4" Diameter swivel casters with front brakes standard.

Refrigeration


- Self-contained system, rear mounted compressor.
- Electrodeposition coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- Innovative hot gas frame heating system reduces condensation and increases energy.

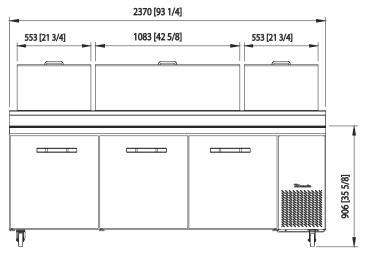

Side view

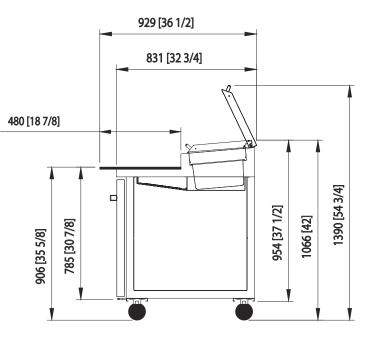

Top view

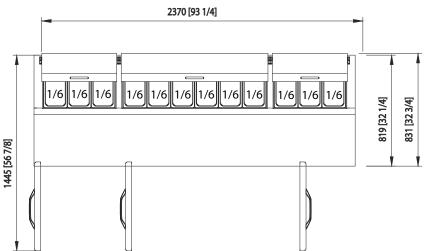

- This product may exprose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65War nings.ca.gov.

WWW.FGUVAT LINUSCAUOV.
 Ce produit peut vous exposer à des agents chimiques incluant le Diisononyl
 Phthalate(DINP), reconnu par l'Esat de Californie comme causant le cancer, Pour de plus amples renseignements, consulter le site www.P65Wamings.ca.gov.

Doors

Self-closing doors

- Durable door gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal door handles. (Ni-Cr Plated)
- Door designed to open easily.

Design & Features

• Self-diagnostic digital temperature control & monitor system.

• Digital display allows for easy monitoring.

Digital controls include automatic evaporator fan motor delay
 Rounded corner design gives a stylish appearance and reduces
 chances of injury.

• Visual and audible door open alarm, alarm sounds when doors are not completely closed to protect against food spoilage

Optional Features & Accessories

- 2.5" diameter casters available.
- 6" adjustable legs available.
- Additional shelves are available.
- Drawer odels available
- 6" pans available

Door	3
Capacity Cu.Ft.	30.8
Shelves	6
Refrigerant	R-290
Temperature Range	33°F ~ 39°F
Easy Maintenance	Sliding Condensing Unit
Connection	9.8 ft long (3m) flexible three wire cord with modeled plug
HP	3/8
Voltage	115V/60Hz
Amps	3.5
NEMA Config.	NEMA 5-15



Blue Air has right to change specifications without further notice.





blueairfse.com



orders@blueairfse.com



223 W. Rosecrans Ave., CA 90248 T: 310-808-0102 9 W. Shelton Terrace #A, Hillside, NJ 07205 T: 908-688-0970