

*Blueair by*  
**BLUENIX**

# MODEL BDD69-3B-HC BACK BAR COOLER



## **Stainless steel cabinet construction**

Stainless steel top with black vinyl coated steel walled exterior. Interior is galvanized steel with stainless steel floor..



## **Temperature range between 33°F ~ 39°F**

Air guard on rear wall ensures proper air circulation and cooling.



## **Hydrocarbon refrigerants (R-290)**

Increases energy HFC refrigerants. It is safer for the environment and does not cause ozone depletion.



### **Cabinet Dimensions** (inches/mm)

| L                  | D                 | H             |
|--------------------|-------------------|---------------|
| 69 1/8"<br>1755 mm | 27 1/8"<br>688 mm | 37"<br>940 mm |

### **Weight** (lbs/kg)

| Net Weight        | Ship Weight       |
|-------------------|-------------------|
| 240 lbs<br>107 kg | 265 lbs<br>120 kg |



Intertek

Conforms to NSF/ANSI 7 (ETL)



Intertek



## **Cabinet construction**

- High density foamed in place polyurethane insulation – Environmentally safe.
- Two (2) adjustable shelves per section
- Interior height allows stacking of three “tall boy” beers
- Standard 12” stainless steel beer tower

## **Refrigeration**

- Front breathing, side mounted compressor unit. Compressor configuration allows unit to be efficient in narrow spaces and be serviced without being moved.
- Epoxy coated evaporator reduces potential corrosion
- Innovative hot gas frame heating system reduces condensation and increases energy efficiency.
- Automatic defrosting


## **Doors**

- Black recessed door handles
- Durable gasket with easy replacement.
- Standard door locks


## **Optional Features & Accessories**

- 6” legs available
- 4” caster available


Front view

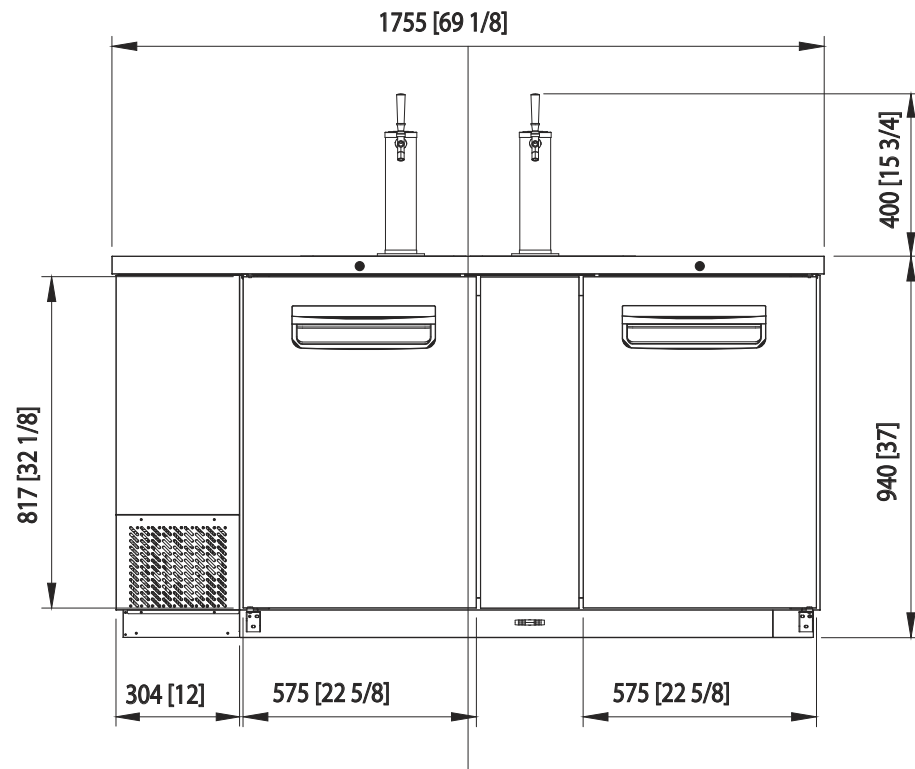

Side view

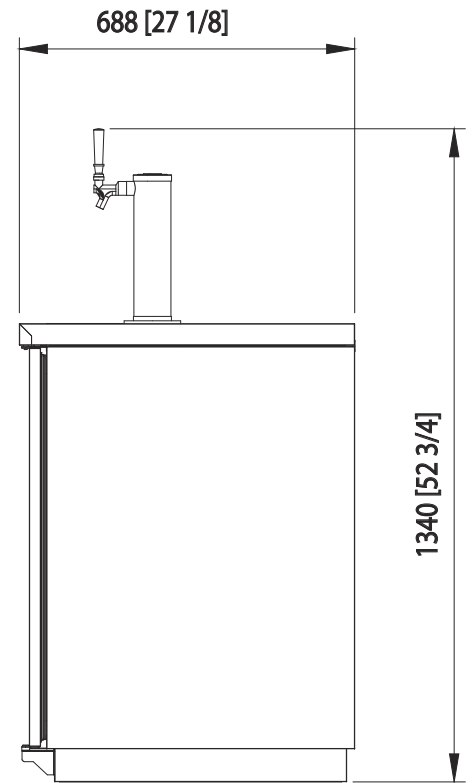

Top view

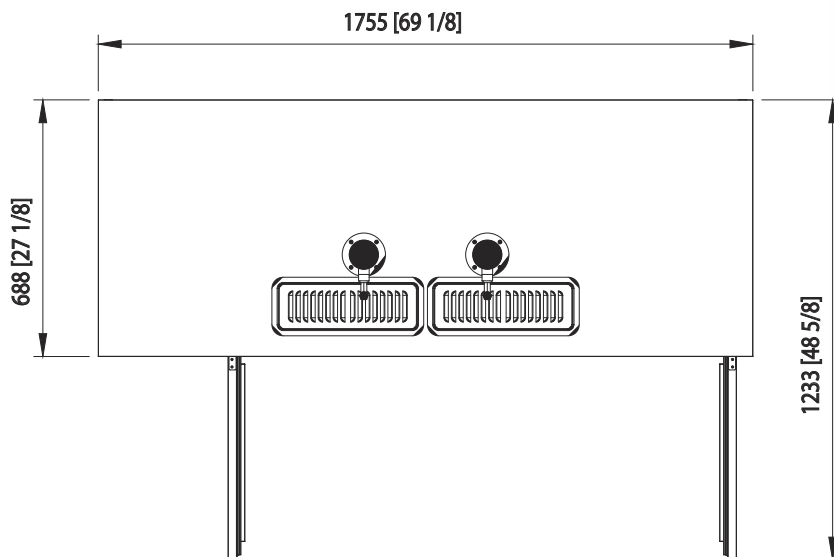

|                      |  |
|----------------------|--|
| Barrels(1/2)         | 3  |
| Capacity<br>Cu.Ft.   | 23   |
| Doors                | 2  |
| Refrigerant          | R-290  |
| Temperature<br>Range | 33°F ~ 39°F  |
| Easy<br>Maintenance  | Sliding<br>Condensing Unit                                     |
| Connection           | 9.8 ft long (3m) flexible three<br>wire cord with modeled plug |
| HP                   | 3/8  |
| Voltage              | 115V/60Hz  |
| Amps                 | 3.8  |
| NEMA Config.         | NEMA 5-15  |
| Lighting             | Interior LED lighting  |



- This product may expose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).  
- Ce produit peut vous exposer à des agents chimiques incluant le Diisononyl Phthalate(DINP), reconnu par l'Etat de Californie comme causant le cancer. Pour de plus amples renseignements, consulter le site [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Blue Air has right to change specifications without further notice.

**Blueair by**  
**BLUENIX**



[blueairfse.com](http://blueairfse.com)



[orders@blueairfse.com](mailto:orders@blueairfse.com)



1-886-677-8500



223 W. Rosecrans Ave., CA 90248  
T: 310-808-0102

9 W. Shelton Terrace #A, Hillside, NJ 07205  
T: 908-688-0970