

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project:		
Model #:		
Item #:		
Available W/H:		Qty:
Approval:		
AIA #:	SIS #:	
CSI Section 11400		

Pass Thru Half Solid Door Heated Cabinet

PRO Series

Pass-Thru

____ FEATURES & BENEFITS =___

Digital temperature control & monitor system

- · Keeps food products safe by maintaining constant temperatures
- Alarm beeps when doors are not sealed
- · Early warning alarm program detects issues before malfunction occurs
- · Digital display allows for easy monitoring
- · Sensitive touch display
- Ducted fan air distribution system Maintains temperature within the food zone
- On/Off switch

ON/OFF switch is located on control panel

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

- LED interior lighting
- High-density polyurethane insulation The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- Half length stainless steel solid doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime guaranteed heavy duty hinges and handles



PRO-77-6H-PT	12	78.1	9	3000	15	894	773/4 x 361/4 x 78
Model	Swing Door	CU./FT.	#of Shelves	Wattage (W)	AMPS	Crated Weight (lbs.)	$L \ge D^* \ge H^+$ (inches)
							Intertek Intertek U. S. A

* Depth does not include 2-1/2" for door handles. † Height does not include 5" for caster height.

Model: PR0-77-6H-PT

Pass Thru Half Solid Door Heated Cabinet

Pass-Thru PRO Series

Model : PRO-77-6H-PT

ELECTRICAL DATA				
Voltage	208/115/60/1			
Plug Type	•••• NEMA L14-20P			
Full Load Amperes	15			
Wattage (W)	3000			
Cord Length (ft.)	8			
Refrigerant	R-290			
DIMENSIONAL DATA				
# of Doors	12			
# of Racks Accepted	3			
Net Capacity (cu. ft.)	78.1			
Ext. Length Overall (in.)	773/4 (1976mm)			
Ext. Depth Overall (in.)*	361/4 (920mm)			
Ext. Height Overall (in.) [†]	78 (1982mm)			
Int. Length Overall (in.)	681/4 (1735mm)			
Int. Depth Overall (in.)	275/8 (702mm)			
Int. Height Overall (in.)	583/4 (1493mm)			
# of Shelves	9			
Shelf Size (L x D) (in.)	223/4 x 263/8 (Left/Right)			
	25 x 263/8 (Middle)			
Net Weight (lbs.)	826			
Gross Weight (lbs.)	894			

Actual shipping weight may differ due to extra packing materials for product protection. * Depth does not include 2-1/2 for door handles.

† Height does not include 5" for caster height.

WARRANTY : 3 Year Parts and Labor Warranty

STANDARD FEATURES

- Door locks
- 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design

OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI:
- M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700, (M) H77R801710
 Half door bun tray rack: TSP-2224
- (each holds up to six 18"L x 26"D sheet pans-sold separately)
- Tray slides kits: TS23-N1LR(#1), TS23-N1LR HALF, TS23-N4LR (#4), TS23-N4LR HALF, TS23-UNLR-H (Universal), TS23-UNLR-H HALF, TS3-N1C(#1), TS3-N1C HALF, TS3-N4C(#4), TS3-N4C HALF, TS3-UNC-H(Universal), TS3-UNC-H HALF


(GERMAN

(KNIFE)


- (1) Pair of #1 Tray Slides: H26R104460
- (1) Pair of Universal Tray Slides: H26R104470

PLAN VIEW

(unit : inch)

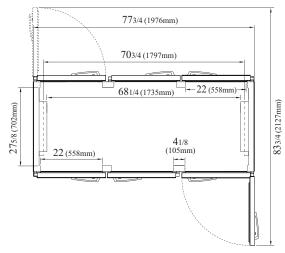

TOP VIEW

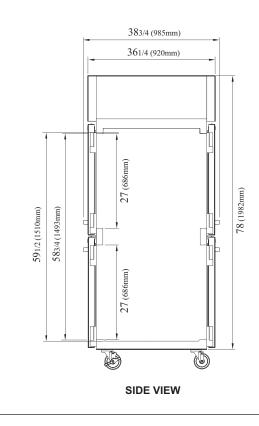

Ver.20230126



Turbo Air : 800-627-0032
 Warranty : 800-381-7770

GK: 800-500-3519

AC : 888-900-1002



IRADIANCE *Turbo air* Texaking

Continued product development may necessitate specification changes without notice.