



Project: _____
Items: _____
Quantity: _____
Approval: _____
Date: _____

Knock-Down Heater Proofer

This unit was designed keeping in mind the need for compact and affordable shipping. It promotes operational efficiency through its compact and ergonomical design.

Features:

- Heavy-duty insulated aluminum construction
- Ships knock-down
- Forced air design
- Lift-out internal air baffle mounted on back panel
- Heating module secured in place by threaded bolt
- Dual proof/heat digital thermostatic control, equipped with read-out LED display, temperature sensor, circuit breaker
- Proof mode: 95% RH at 110F
- Heat mode: Max temp 180F
- Cabinet door opens at 270 degrees
- Cabinet doors have aluminum frame and lexan window
- Magnetic door gasket is secured to door frame
- Removable analog drawer
- Can hold 34 18" x 26" pans or 70 14" x 18" pans
- Electrical specifications: 120V – 60 HZ; plugs into standard
- 110V outlet; NEMA 5-15P
- NSF; ETL
- Assembles in 30 mins

Benefits:

- Knock-down design of this unit saves on freight.
- The pans can be loaded from bottom
- Clear lexan doors allows for greater visibility of food items
- Forced air design provides even heat distribution
- Less time and effort spent in closely monitoring food temperatures and moisture within the heater proofer
- Easily attain accurate and precise temperature and moisture level
- Food quality, texture and freshness was well-maintained
- Over current protection to the entire equipment
- Removable drawer allows for easy and efficient cleaning



NHPL-1834-KD-E




KNOCK-DOWN HEATER PROOFER



Founded in 1946

Knock-Down Heater Proofer

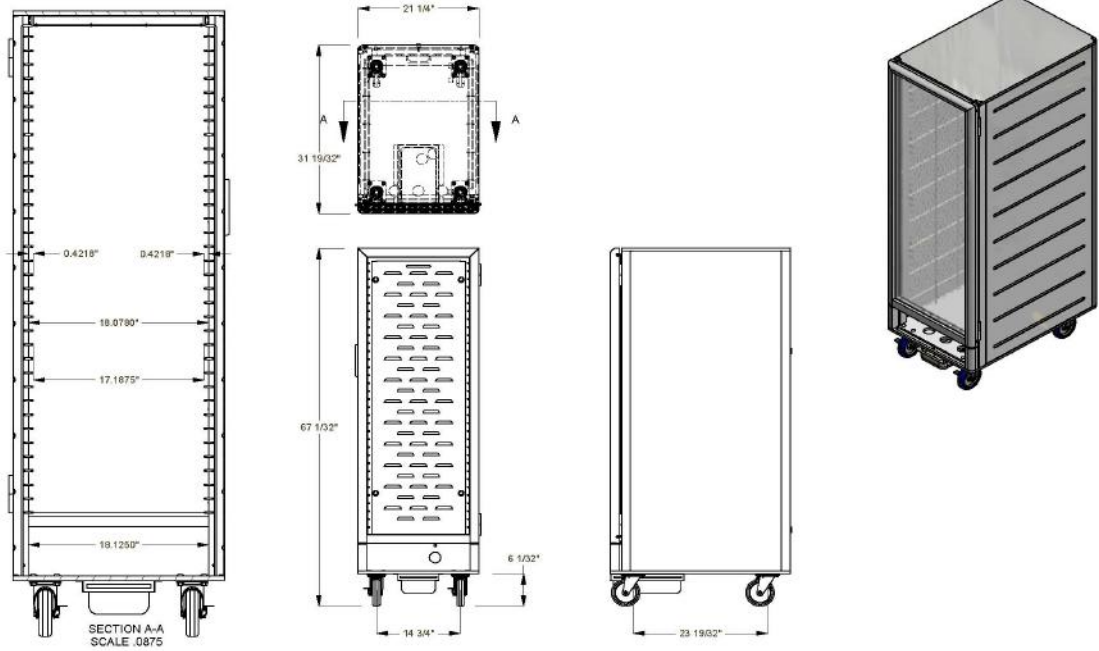

| Model Number | Overall Dimensions | | | | | | Approx. Ship Wt | |
|----------------|--------------------|--------|--------|--------|--------|---------|-----------------|------|
| | Width | | Length | | Height | | (lb) | (kg) |
| | (in) | (mm) | (in) | (mm) | (in) | (mm) | | |
| NHPL-1834-KD-E | 21.25 | 539.75 | 30.75 | 781.05 | 67.031 | 1702.58 | 135 | 61 |



In line with our policy to continually improve our products, Winholt reserves the right to change materials and specifications without notice.