

**REFRIGERATOR MANUFACTURER**  
**Turbo air**  
 more durable, efficient, beautiful

4184 E. Conant St.  
 Long Beach, CA 90808  
 Tel. 310-900-1000  
 Fax. 310-900-1077  
[www.turboairinc.com](http://www.turboairinc.com)

|                 |       |
|-----------------|-------|
| Project :       |       |
| Model # :       |       |
| Item # :        | Qty : |
| Available W/H : |       |
| Approval :      |       |

## Solid Door Heated Cabinet

Reach-In  
**PRO Series**

**Model : PRO-26H(-L)**  
**PRO-26H2(-L)**

### ≡ FEATURES & BENEFITS ≡

- **Digital temperature control & monitor system**
    - Keep food products safe by maintaining constant temperatures.
    - Alarm beeps when doors are not sealed.
    - Early warning alarm program detects issues before malfunction occurs.
    - Digital display allows for easy monitoring.
    - Sensitive touch display.
  - **Ducted fan air distribution system**  
 Maintains temperature within the food zone
  - **On/Off switch**  
 ON/OFF switch is located on control panel
  - **All stainless steel cabinet construction**  
 The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.
  - **Sturdy, clean stainless steel shelving**  
 Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.
  - **LED interior lighting**
  - **High-density polyurethane insulation**  
 The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
  - **Full length stainless steel solid doors with locks**
  - **Self-closing doors with stay open feature at 120 degrees**
  - **Heated cabinet holds 140°F ~ 180°F for the best in food preservation**
  - **Lifetime guaranteed heavy duty hinges and handles**
- PRO-26H: Right hinged, 115V
  - PRO-26H-L: Left hinged, 115V
  - PRO-26H2: Right hinged, 208V
  - PRO-26H2-L: Left hinged, 208V



| Model                       | Swing Door | CU./FT. | #of Shelves | Wattage (W) | AMPS        | Crated Weight (lbs.) | L x D* x H† (inches)   |
|-----------------------------|------------|---------|-------------|-------------|-------------|----------------------|--|
| PRO-26H(-L)<br>PRO-26H2(-L) | 1          | 25.4    | 3           | 1550        | 13.5<br>7.5 | 301                  | 28 <sup>3</sup> / <sub>4</sub> x 33 <sup>7</sup> / <sub>8</sub> x 78 |

# Solid Door Heated Cabinet

Reach-In  
PRO Series

## Model : PRO-26H(-L) PRO-26H2(-L)

| ELECTRICAL DATA            | PRO-26H(-L)   | PRO-26H2(-L)  |
|----------------------------|---|---|
| Voltage                    | 115/60/1  | 208/115/60/1  |
| Plug Type                  | Ⓜ NEMA 5-15P  | Ⓜ NEMA L14-20P  |
| Full Load Amperes          | 13.5  | 7.5   |
| Wattage (W)                | 1550  | 1550  |
| Feed Wires with Ground     | 3   | 4   |
| Cord Length (ft.)          | 8   | 8   |
| DIMENSIONAL DATA           |   |   |
| # of Doors                 | 1   | 1   |
| # of Racks Accepted        | 1   | 1   |
| Net Capacity (cu. ft.)     | 25.4  | 25.4  |
| Ext. Length Overall (in.)  | 28 <sup>3</sup> / <sub>4</sub> (730mm)                          | 28 <sup>3</sup> / <sub>4</sub> (730mm)                          |
| Ext. Depth Overall (in.)*  | 33 <sup>7</sup> / <sub>8</sub> (860mm)                          | 33 <sup>7</sup> / <sub>8</sub> (860mm)                          |
| Ext. Height Overall (in.)† | 78 (1982mm)   | 78 (1982mm)   |
| Int. Length Overall (in.)  | 22 (559mm)  | 22 (559mm)  |
| Int. Depth Overall (in.)   | 27 <sup>5</sup> / <sub>8</sub> (702mm)                          | 27 <sup>5</sup> / <sub>8</sub> (702mm)                          |
| Int. Height Overall (in.)  | 58 <sup>3</sup> / <sub>4</sub> (1493mm)                         | 58 <sup>3</sup> / <sub>4</sub> (1493mm)                         |
| # of Shelves               | 3   | 3   |
| Shelf Size (L x D) (in.)   | 23 <sup>1</sup> / <sub>2</sub> x 26 <sup>3</sup> / <sub>8</sub> | 23 <sup>1</sup> / <sub>2</sub> x 26 <sup>3</sup> / <sub>8</sub> |
| Net Weight (lbs.)          | 260   | 260   |
| Gross Weight (lbs.)        | 301   | 301   |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 1-1/4" for door handles.

† Height does not include 5" for caster height.

### ■ WARRANTY : 3 Year Parts and Labor Warranty

### ■ STANDARD FEATURES

- Door locks standard
- Standard 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design


\*\* Lead time applies. Please contact your sales representative for more details to order.

### ■ OPTIONAL ACCESSORIES


- 5" caster, 1/2" diameter & 13 TPI:  
M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: H26R901680
- Half door bun tray rack: TSP-2224  
(each holds up to six 18"L x 26"D sheet pans)
- Full door bun tray rack: TSP-2250  
(each holds up to fifteen 18"L x 26"D sheet pans)
- Tray slides kits: TS1-N1(#1), TS1-N4(#4), TS1-UN(Universal)
- (1) Pair of #1 Tray Slides: H26R104460
- (1) Pair of Universal Tray Slides: H26R104470

## PLAN VIEW

(unit : inch)

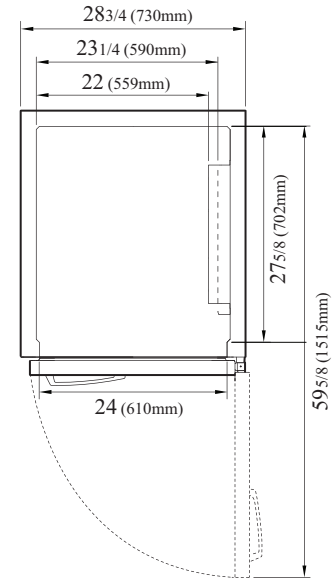

TOP VIEW

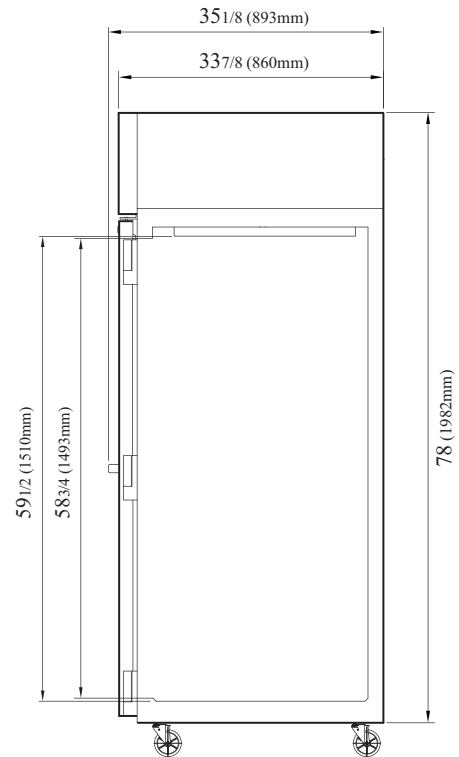

SIDE VIEW

Ver.20200420



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

REFRIGERATOR MANUFACTURER  
**Turbo air**

GERMAN  
KNIFE

RADIANCE

REFRIGERATION SYSTEM  
**Turbo air** **TEXAKING**