

#### Model:

- □ CIMO330
- CIMO335



# Features and Benefits

- 30" (768 mm) wide space-saving design.
- Produces up to 310 lbs (141 kg) of ice per day.
- · Energy and Environment
  - Exceeds new 2018 DOE (Department of Energy) regulations.
  - Up to 20% more energy efficient than other models.
  - Environmentally friendly, including BPA-free plastic and recyclable parts.
- Sanitation
  - Plastic Food Zone eliminates hard-to-clean nooks and crannies. allowing for effortless wipe down and easy, long-lasting sanitation.
  - Built in Agion® ensures unbeatable antimicrobial protection.
  - Smart LED light indicates machine status and when cleaning is required.
  - Simple, one-touch controls for sanitization and descaling.
  - BPA-free snap-in, snap-out dishwasher-safe components.
- Unique Dual Exhaust Air-cooled machines are designed to discharge hot air from both the side and top of the unit, increasing installation flexibility and reducing the potential of obstructed exhaust.
- Universal Smart Harness<sup>™</sup> control board simplifies installation and servicing with better access, digital diagnostics, universal components and common configuration.

#### Ice Form

## Bin Chart Kits for Combining Wider Bins with Smaller Models

FULL CUBE DIMENSIONS						
W x D x H (in.)	7/8 x 7/8 x 7/8					
W x D x H (mm)	22 x 22 x 22					
HALF CUBE DIMENSIONS						
HALF CUBE DI	MENSIONS					
W x D x H (in.)	3/8 x 7/8 x 7/8					



	ICE STORAGE BINS													
	Model No. Capacity Width	<b>B25</b> 242 lbs (110 kg) 30 in (762 mm)	<b>B40</b> 344 lbs (156 kg) 30 in (762 mm)	<b>B42</b> 351 lbs (160 kg) 22 in (559 mm)	<b>B55</b> 510 lbs (232 kg) 30 in (762 mm)	<b>B700</b> 680 lbs (308 kg) 30 in (762 mm)	<b>B110</b> 854 lbs (388 kg) 48 in (1,219 mm)	<b>B1000</b> 1,000 lbs (454 kg) 48 in (1,219 mm)	<b>B1300</b> 1,320 lbs (599 kg) 48 in (1,219 mm)	<b>B1325</b> 1,325 lbs (601 kg) 60 in (1,524 mm)	<b>B1660</b> 1,660 lbs (753 kg) 60 in (1524 mm)			
Kits	CIM0330	Kit Not [	Kit Not Required		Kit Not Required		BPF-1	Hold Down Securement						
	CIMO335	MUNOUP	required	N/A	A Kit Not Required		DEFT	Recommended						

\*See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.

## **Options & Accessories**

WATER FILTERS							
Ice Machine Model	Manifold						
ice Machine Model	System	Replacement					
CIM0330	IFQ1	IOMQ (1)					
CIM0335	IFQI	10MQ (1)					

Note: All modular cube CIM units can be installed with the O₂-Matic™ Ozone Delivery System.















### Ice Maker Warranty

COMMERCIAL WARRANTY						
Ice Maker	3 YEARS parts and labor					
Evaporator and Compressor	5 YEARS parts					
Evaporator (when enrolled in our filter program)	7 YEARS parts and labor					





#### Air Cooled

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.


- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8".

#### **Dual Exhaust for Installation Flexibility**




## Water Cooled

- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8".
- E. Condenser water in, 3/8" FPT.
- F. Condenser water out, 1/2" FPT.

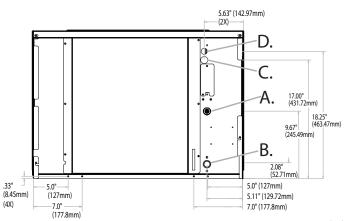

Air Cooled

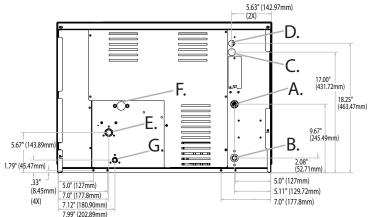

Water Cooled

## **Operating Requirements**

	MINIMUM	MAXI	MUM	
		60 Hz	50Hz	
Ambient Temp. Range Air	50°F (10°C)	100°F (38°C)	110°F (43°C)	
Water Temp.	40°F (4.4°C)	100 1 (30 C)	110 1 (43 C)	
Water Pressure	20 PSIG (1.4 BAR)	80 PSIG	(5.5 BAR)	

#### **Dimensions**

ALL MODELS							
W x D x H (in.)	30.25 x 24.25 x 21.25						
W x D x H (mm)	768 x 616 x 540						

## **Specifications**

		Ice Pro	Cube duction 24hrs		<b>Water Usage</b> gallons per 100 lbs of Ice 90°F air/70°F water					
Model Number	Cond. Unit	70°F air/ 50°F water Ibs (kg)	90°F air/ 70°F water Ibs (kg)	Potable	Condenser	kWH Used per 100 lbs of ice @ 90°F air/ 70°F water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour
CIMO330A	Air	313 (142)	244 (111)	20.0	-	6.69	115/60/1	11.0	15	
CIMO330W	Water	316 (143)	274 (124)	19.6	179.0	5.19	115/00/1	10.7	15	4,400
CIMO335A	Air	290 (132)	220 (100)	22.0	-	7.32	220-240/50/1	6.9	16	

<sup>\*</sup> Daily ice production based on half cube configuration.

Number of Wires:

Approx. Shipping Weight lbs (kg):

3 (including ground) CIMO33OA 145 (65.7) • CIMO33OW 145 (65.7) • CIMO335A 145 (65.7)

Refrigerant Type:

R404A

Rev: 12/17 Part: Coo1







B55

# **Features**

- Application storage capacity from 242 lbs (110 kg) to 854 lbs (388 kg).
- Multiple bin tops provide an easy solution for mounting ice makers on different sized bins.
- Polyethylene bin liner is insulated with foam for maximum ice preservation 1.5" to 3" (38 mm to 76 mm).
- 31" deep for use where space is at a premium.
- · Built-in ice scoop holders on certain models.
- Sturdy leg design 6" (152 mm) adjustable NSF approved legs standard.
- · Durable aluminum finish.

#### **Bin Accessories**

lce-O-Matic Part Number	Description
1011517-22	Plastic ice shovel
1011517-23	Hanging bracket for ice shovel
1011517-24	46.5" Plastic paddle
1051517-29	Hanging bracket for ice paddle
9051127-01	82 Ounce ice scoop

## Single Ice Machine Configurations

lce-O-Matic offers a full line of bins for most applications. From low profile slope-front bins to high capacity space-saving uprights, we have a bin to meet any need. The following table will help you create the system you need in a safe and cost effective manner.

			Application Approximate Bin Storage Shipping		ICE Series Cube Makers			Nugget Ice Makers	Flake Ice Machine
Bin Model No.	Style	lbs (kgs)		<b>30"</b> (762 mm) wide	<b>22"</b> (559 mm) wide	<b>30"</b> (762 mm) wide	<b>48"</b> (1,219 mm) wide	<b>21"</b> (533 mm) wide	<b>21"</b> (533 mm) wide
B25PP*	Slope Front	242 (110)	74 (34)	$\triangle \triangle$	KBT19	ΔΔ	N/A	KBT19	KBT19
B4OPS	Slope Front	344 (156)	103 (47)	$\triangle \triangle$	KBT19	ΔΔ	N/A	KBT19	KBT19
B42PS	Slope Front	351 (160)	99 (45)	N/A	ΔΔ	N/A	N/A	KBT24	KBT24
B55PS	Slope Front	510 (232)	125 (57)	$\triangle \triangle$	KBT19	ΔΔ	N/A	KBT19	KBT19
B11OPS	Slope Front	854 (388)	163 (74)	BPF-1***	N/A	BPF-1***	ΔΔ	KBT23	KBT23

 $\Delta\Delta$  Kit not required.  $\Delta\Delta^{**}$  Ice clumping issues may arise. \* Rotocast finish N/A Not Applicable

# Side-by-Side Ice Machine Configurations

There are times when it is desirable to install 2 ice machines side by side on a bin. The reasons may range from gaining maximum output to creating redundancy. Ice-O-Matic offers an array of kits and bins with custom order tops for just such applications. The following table will help you create the system you need in a safe and cost effective manner.

		Application	Approximate Shipping	CIM Series Cube Makers	ICE Series Cube Makers			Nugget Ice Makers	Flake Ice Machine
Bin Model No.	Style	<b>Bin Storage</b> lbs (kgs)	<b>Weight</b> lbs (kgs)	<b>30"</b> (762 mm) wide	<b>Two 22"</b> (559 mm) wide	<b>Two 30"</b> (762 mm) wide	<b>Two 48"</b> (1,219 mm) wide	<b>Two 21"</b> (533 mm) wide	<b>Two 21"</b> (533 mm) wide
B25PP*	Slope Front	242 (110)	74 (34)	N/A	N/A	N/A	N/A	N/A	N/A
B4OPS	Slope Front	344 (156)	103 (47)	N/A	N/A	N/A	N/A	N/A	N/A
B42PS	Slope Front	351 (160)	99 (45)	N/A	N/A	N/A	N/A	N/A	N/A
B55PS	Slope Front	510 (232)	125 (57)	N/A	N/A	N/A	N/A	N/A	N/A
B11OPS	Slope Front	854 (388)	163 (74)	N/A	N/A	N/A	N/A	KBT22	KBT22

 $\hbox{O \it Must use remote or water cooled model only.} \quad \Delta\Delta \hbox{\it Kit not required.} \quad \hbox{$^*$ Rotocast finish} \quad \hbox{\it N/A Not Applicable}$ 

 $O^*$  Must use remote or water cooled model only; ice clumping issues may arise.  $\Delta \Delta^{**}$  Ice clumping issues may arise.






<sup>\*\*</sup> ICE1506 is compatible with B700-30, B1000-48, B1300-48, B1325-60 & B1600-60.





### **Dimensions**

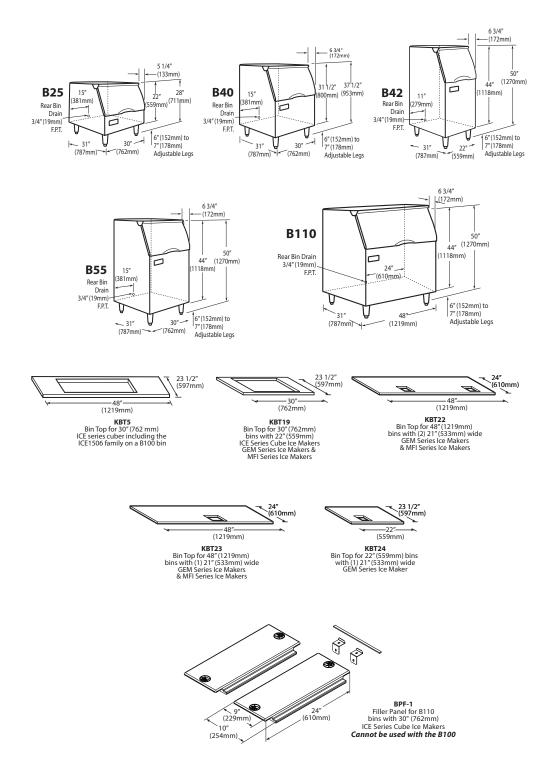

NOTES

Approx. Shipping Weight lbs (kg): B110 191 (87 kg) • B55 170 (77 kb) • B25 95 (43 kg) • B40 135 (61 kg) • B42 135 (61 kg)