

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project:			
Model #:			
Item #:			
Available W/H:		Qty:	
Approval:			
AIA #:	SIS #:		
CSI Section 11400			

Swing Door Freezers



Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

No electrical cabinet heater is needed

Turbo Air is the first in the industry to replace a frame heater with a method of using compressor-produced heat. This eliminates any unnecessary energy consumption while providing efficient freezing performance.

High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

Triple pane heated glass doors

Equipped with unique triple-pane heated glass doors which enhance energy efficiency by preventing heat transfers and minimizing condensation. Lightweight door construction reduces door maintenance, bushing wear, and facilitates smooth door opening.

- LED interior lighting
- Freezer holds -10°F ~ 5°F for the best in frozen food preservation

Glass Door Merchandisers Super Deluxe Series

Model : TGF-5SD*-N



TGF-5SDW-N

		NATUR A Refriger	ISO 9001:2008	tek Intertek
#of Shelves	HP	AMPS	Crated Weight (lbs.)	$L \ge D^* \ge H^\dagger$ (inches)

Swing CU./FT. Model Door TGF-5SD*-N 4.26 2 1/32.3 195 25 x 231/4 x 301/2 1 Ver 20230103 Printed in U.S.A.

* Depth does not include 2-3/8" for rear mechanical component and additional 1-5/8" for a power cord bushing & radius of curvature. * Depth does not include 2-1/4" (57mm) for door handle. † Height does not include 2-1/4" (56mm) for leg height. \$White cabinet(W), Black cabinet(B).

Swing Door Freezers

(unit : inch)

PLAN VIEW

Model : TGF-5SD*-N

ELECTRICAL DATA				
Voltage	115/60/1			
Plug Type	NEMA 5-15P			
Full Load Amperes	2.3			
Compressor HP	1/3			
Cord Length (ft.)	7			
Refrigerant	R-290			
DIMENSIONAL DATA				
# of Doors	1			
Net Capacity (cu. ft.)	4.26			
Ext. Length Overall (in.)	25 (635mm)			
Ext. Depth Overall (in.)*	231/4 (590mm)			
Ext. Height Overall (in.)†	30 1/2 (775mm)			
Int. Length Overall (in.)	205/8 (525mm)			
Int. Depth Overall (in.)	183/4 (475mm)			
Int. Height Overall (in.)	261/4 (665mm)			
# of Shelves	2			
Shelf Size (L x D) (in.)	193/8 x 165/8			
Net Weight (lbs.)	164			
Gross Weight (lbs.)	195			

Design and specifications subject to change without notice. Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2-1/4" (57mm) for door handle. Depth does not include 2-3/8" for rear mechanical component and additional 1-5/8" for a power cord bushing & radius of curvature.

+ Height does not include 2-1/4" (56mm) for leg height.

• WARRANTY : 5 Year Parts and Labor Warranty 7 Year Compressor Warranty


STANDARD FEATURES

- Anti-corrosion coated evaporator
- Door locks standard
- * **Two color options available (standard):** Super Deluxe series comes in white cabinet (W), black cabinet with black color trim (B).

OPTIONAL ACCESSORIES

- Additional PE coated wire shelf: P0178A0300
- Price tag channel: P0122K5700 (18-1/2"L)

lurbo air

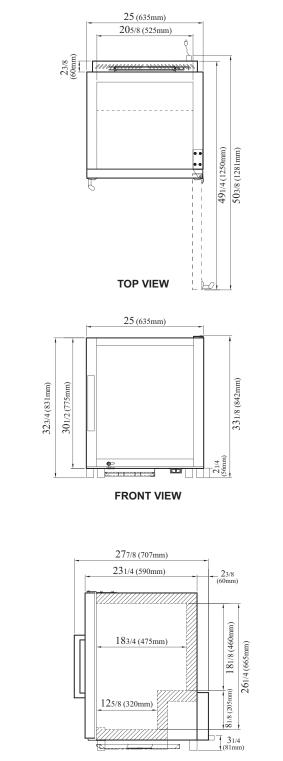

Ver.20230103



(GEAMAN) |KNIFE)

- **Turbo Air** : 800-627-0032 **GK** : 800-500-3519
- Warranty : 800-381-7770 AC : 888-900-1002

Texaking

SIDE VIEW

Continued product development may necessitate specification changes without notice.

Turbo air