	BEVERAGE-AIR
--	--------------

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

## **DD Draft Beer Equipment-Direct Draw Dispenser**

DD48HC Solid Door Hydrocarbon Series MODELS: DD48HC-1-B DD48HC-1-S



DD48HC-1-B



**DD48HC-1-S** 

# 3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Exterior is wear resistant vinyl on steel in black or stainless steel finish
- Top is made from heavy-duty stainless steel including drip tray
- Interior is galvanized steel on walls and ceiling, reinforced floor is heavy duty stainless steel
- Full electronic control
- Dual draft arm
- 3-in-1 Draft Solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other nonalcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Self-closing doors with locks
- Magnetic gaskets provide positive door seal
- Compressor available on left or right, specify at time of unit order
- Maintains product temperatures between 36°F and 38°F

### **OPTIONS & ACCESSORIES**

- ☐ Custom tower hole location
- Drip tray location option
- □ Wine models
- Faucet locks
- Glass rinser
- □ 3"-6" casters or 6" black legs
- 1- 5 Tap tower
- ☐ 2, 3 & 4 way manifolds
- Dual tap placement option
- No draft/hole cover option
- Remote option

#### REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil


















MODEL	DD48HC-1-B	DD48HC-1-S	
EXTERNAL DIMENSIONAL DATA			
Width Overall	48"	48"	
Depth Overall	24 1/2"	24 1/2"	
Height Overall	51 1/4 "	51 1/4 "	
Number of Doors	2	2	
Depth with Door Open 90°	41 1/4"	41 1/4"	
Door Opening (inches)	16 3/8" x 29 1/4"	16 3/8" x 29 1/4"	
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft.)	12.4	12.4	
Internal Width Overall (in)	36 1/8"	36 1/8"	
Internal Depth Overall (in)	18 5/8"	18 5/8"	
Internal Height Overall—(in)	29 3/8"	29 3/8"	
Number of 1/2 Kegs	2	2	
ELECTRICAL DATA			
Full Load Amperes 115/60/1	2.5	2.5	
REFRIGERATION DATA			
Horsepower	1/4	1/4	
Capacity (BTU/Hr)*	1702	1702	
WEIGHT DATA			
Gross Weight (Crated lbs)	284 lbs	304 lbs	
Height - Crated	40"	42"	
Width - Crated	51"	51"	
Depth - Crated	26"	26"	

#### DD48/DD50 KEG CAPACITY





2 Std. 1/2 Keg 2 X 1/6 Keg




Std. 1/2

Keg

## **Bar Equipment-Direct Draw Dispenser Solid Door**

Models: DD48HC-1-B, DD48HC-1-S

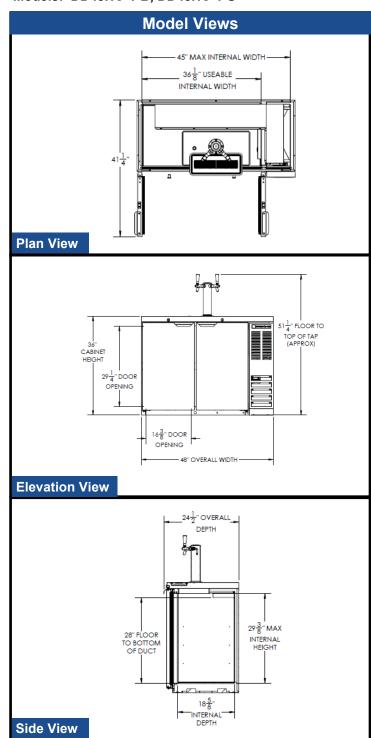

#### **ELECTRICAL CONNECTION**



Units pre-wired at factory and include 8' long cord and plug set.













