

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

## **DD Draft Beer Equipment-Direct Draw Dispenser**

DD68HC Solid Door Club Top Hydrocarbon Series MODELS: DD68HC-1-C-B DD68HC-1-C-S



DD68HC-1-C-B



**DD68HC-1-C-S** 

## **OPTIONS & ACCESSORIES**

- ☐ Full stainless steel exterior
- Stainless steel interior lining
- Custom tower hole location
- □ Drip tray location option
- ☐ Wine models
- Faucet locks
- ☐ 3" Casters or 6" black legs
- 1-6 Tap tower
- 2, 3 & 4 way manifolds
- No draft arm/ hole cover
- Remote option (Refrigerant must be specified at time of order, see note on back on page)

# 3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

### **CABINET CONSTRUCTION**

- Exterior black or stainless steel front and door, gray painted sides
- Top and drip tray are heavy-duty stainless steel
- Interior is galvanized steel on walls and ceiling, reinforced floor and doorsill are heavy duty stainless steel
- Club top, easy glide stainless steel lid for additional storage of glasses, cans or bottles, includes (1) epoxy coated shelf and (1) basket
- Full electronic control
- Two (2) single faucets
- 3-in-1 Draft Solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other nonalcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Self-closing door with lock
- Magnetic gaskets provide positive door seal
- Compressor available on left or right, specify at time of unit order
- Maintains product temperatures between 36°F and 38°F

#### **REFRIGERATION SYSTEM**

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil


















MODEL	DD68HC-1-C-B	DD68HC-1-C-S
EXTERNAL DIMENSIONAL DATA		
Width Overall	69"	69"
Depth Overall with Handle	29"	29"
Height Overall	52 1/2"	52 1/2"
Number of Doors	2	2
Depth with Door Open 90°	50 1/2"	50 1/2"
Door Opening (in)	21" x 30"	21" x 30"
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	25.93	25.93
Internal Width Overall (in)	56 1/8"	56 1/8"
Internal Depth Overall (in)	23 1/8"	23 1/8"
Internal Height Overall (in)	27 1/4"	27 1/4"
Number of 1/2 Kegs	3	3
ELECTRICAL DATA		
Full Load Amperes* 115/60/1	5.5	5.5
REFRIGERATION DATA		
Horsepower*	1/3	1/3
Capacity (BTU/Hr)*	2392	2392
WEIGHT DATA		
Gross Weight (Crated lbs)	400 lbs	400 lbs
Height - Crated	46"	46"
Width - Crated	72"	72"
Depth - Crated	32"	32"

\*NOTE: Remote units are field wired and comes with 6" legs. Refrigerant must be specified at time of order.


#### DD58/68/72 KEG CAPACITY:



2 X 1/6 Keg 1 X ¼ Slim Keg 1 X 1/6 Keg

## **Bar Equipment-Direct Draw Dispenser Solid Door Club Top**

Models: DD68HC-1-C-B, DD68HC-1-C-S

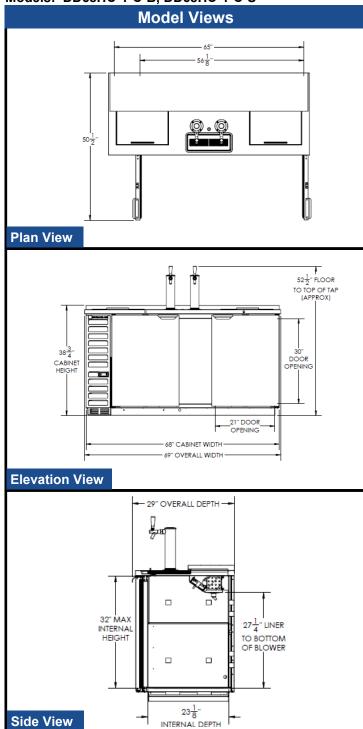

### \*ELECTRICAL CONNECTION



Units pre-wired at factory and include 8' long cord and plug set.

















