

| Project: | AIA# |
|-----------|------|
| ltem: | |
| Location: | SIS# |
| Approved: | |

MODEL:

HF2HC-1S

HORIZON TOP MOUNT REACH-IN

HF2HC Double Doors Reach-in Freezer Hydrocarbon Series



OPTIONS & ACCESSORIES

• Tray slide pair, 1 tray slide set for (1) 18" x

 Stainless steel universal tray slide pair,1 tray slide set for (1) 18" x 26" or (2) 14" x 18"

• Tray slide kit #4 (19 sets per half section)

Remote option* (see note on back page)

26" or (2) 14" x 18" pans (A)

Additional epoxy shelves

Stainless steel breaker

• 6" Legs seismic/flanged

pans (AC)

· Shelf clips

• 3" Casters

3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior is stainless steel front and gray painted sides
- · Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Expansion valve technology
- One piece grille
- LED interior light
- Self-closing door with 120° stay-open feature, on cam-lift hinges
- · Field reversible doors
- Door locks
- Snap-In magnetic gaskets for positive door seal
- · Heavy-duty epoxy coated wire shelves
- 6" Heavy-duty casters, two (2) with brakes
- 8' Cord and plug (see electrical data for details)

FINISH OPTION

HF Standard

(S/S Front, Continuous Coil Coated Sides, Aluminum Interior)

(S/S Front, S/S Sides, Aluminum Interior)

HFS

(S/S Front, Continuous Coil Coated Sides, S/S Interior)

(Complete S/S Exterior & Interior)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Hot gas condensate evaporator
- Adaptive Defrost
- Epoxy coated evaporator coil
- Freezer capable of maintaining product temperature down to -10°F
















| MODEL | HF2HC-1S | |
|------------------------------|---------------------|--|
| EXTERNAL DIMENSIONAL DATA | | |
| Width Overall | 52" | |
| Depth Overall with Handle | 33 ⁷ /8" | |
| Height Overall with Casters | 85" | |
| Number of Doors | 2 | |
| Depth with Door Open 90° | 55 ½" | |
| Door Opening (in) | 21 %" x 61 %" | |
| INTERNAL DIMENSIONAL DATA | | |
| NET Capacity (cubic ft.) | 45.2 | |
| Internal Width Overall (in) | 48″ | |
| Internal Depth Overall (in) | 25 ⅓" | |
| Internal Height Overall (in) | 62" | |
| Number of Shelves | 6 | |
| ELECTRICAL DATA | | |
| Full Load Amperes 115/60/1 | 10.0 | |
| REFRIGERATION DATA | | |
| Horsepower* | 3/4+ | |
| Capacity (BTU/Hr)* | 2580 | |
| SHIPPING DATA | | |
| Gross Weight | 540 lbs | |
| Height - Crated | 88" | |
| Width - Crated | 55" | |
| Depth - Crated | 36" | |

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Top Mount Reach-In Freezer

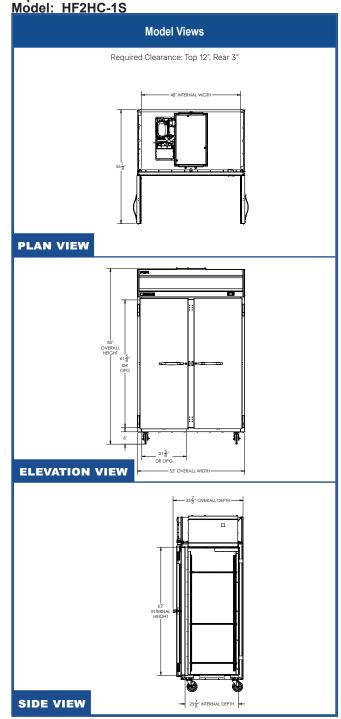





Units pre-wired at factory NEMA 5-15P and include 8' long cord and plug set.

