

DESIGNER LINE ROLL-IN REFRIGERATOR

Model: D2RIN-E

Natural Refrigerant R-290 Model

Designer Line

2-Section Extra-High Roll-In Refrigerator with 72" Cart Capacity

D2RIN-E - Stainless steel front, aluminum end panels and interior

D2RINSA-E - Stainless steel exterior, aluminum interior

D2RINSS-E - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Special electrical req. (consult factory)
Epoxy-coated steel shelves	Correctional Facility Options
Chrome or stainless steel shelves	<ul style="list-style-type: none"> One way security screws
Rehinging of doors (consult factory)	<ul style="list-style-type: none"> Locking hasp (lock not included)
Custom laminates	<ul style="list-style-type: none"> Stainless steel mesh cover
Half doors	<ul style="list-style-type: none"> Coverless hinges

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance-rated "plug" refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant¹

Refrigeration system is accessible on top of cabinet, separate from the "food zone"

Top and side air distribution ducts

Automatic, hot gas condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Magnetic snap-in door gaskets

Cylinder lock in each door

Self-closing doors

72 1/2" high door openings (72"H rack capacity*)

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm

LED interior lighting

Removable stainless steel rack guides

Removable stainless steel ramps

Reinforced stainless steel floor

* Racks not supplied

IMPORTANT NOTE: Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at installation site where space limitations are confining.

¹ R-290 refrigerant meets all federal and state regulatory requirements.

Continental[®]
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cu. ft.)	68 (1926 cu l)
Width, Overall (in.)	68 1/2 (1740 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth (in.) (less doors)	32 (813 mm)
Depth (in.) (doors open 90°)	65 (1651 mm)
Clear Door Width (in.)	27 3/8 (695 mm)
Clear Full Door Height (in.)	72 1/2 (1842 mm)
Height, Overall (in.)	92 (2337 mm)
No. of Door(s)	2
Rack Capacity**	2

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/2
Capacity (BTU/Hr)*	4010

* Rating @ +25°F evaporator, 90°F ambient

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	10.3 (4.9)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

SHIPPING DATA



Height - Crated (in.)	97 (2464 mm)
Width - Crated (in.)	77 (1956 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	176 (4984 cu l)
Weight Std - Crated (lbs.)	730 (331 kg)
Weight SS - Crated (lbs.)	890 (404 kg)

* Maximum rack size including wheels - 27"W x 29"D x 72"H
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug
 (varies by country)

Model Plan Views

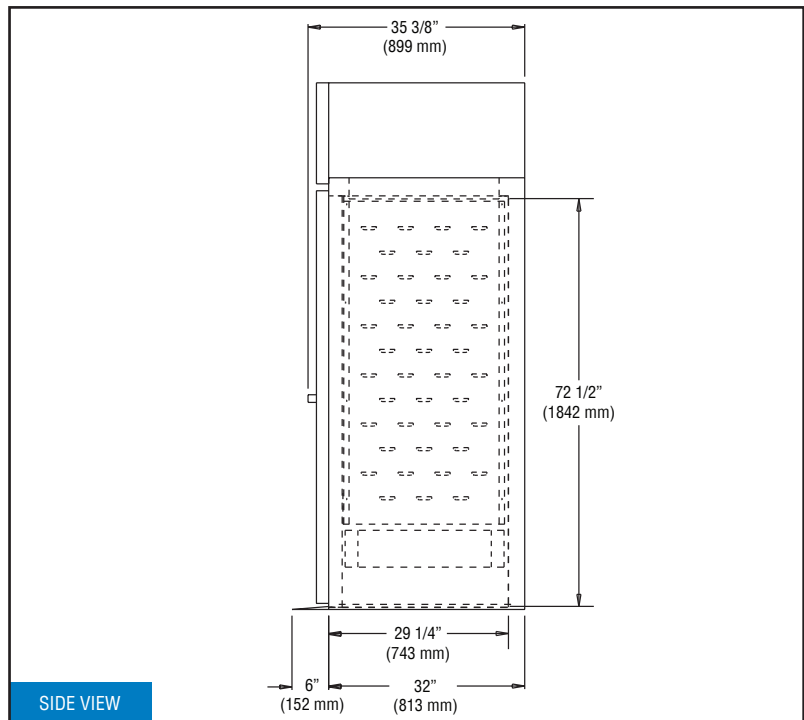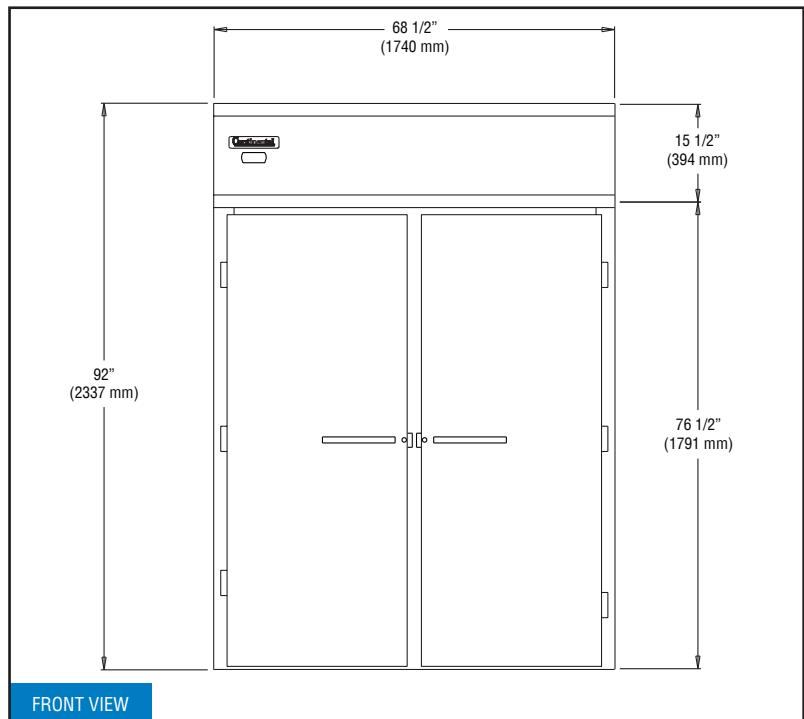

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
 Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunkserry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2020. Continental Refrigerator.
 A Division of National Refrigeration & Air Conditioning Products, Inc.