

Induction Green Heat

Garland Induction Tabletop
Heat Retaining Unit RTCSmp Hold-Line

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Models

- GI-HO 1500



Induction warm holding system consisting of:
Induction generator with two heat retaining/
holding zones.
Equipped with the latest RTCSmp (Realtime
Temperature Control System) technology.

Induction Green Heat

Standard Features

Induction generator:

- A generator, developed specifically for heat retaining/holding, built in an aluminum enclosure, which includes an integrated air fan.
- Fresh air is supplied by the fan, located at the bottom of the unit. The unit is also equipped with an air guiding system that directs the hot air out of the housing.

Heat retaining plate:

- The heat retaining plate is equipped with the latest RTCSmp sensor technology which enables temperature controls in real-time. The set temperature is displayed via a 7-segment display underneath the ceramic glass. The heat retaining plate includes five (5) temperature sensors per zone.
- The unit has two zones that can be controlled at different temperatures.

Control unit:

- The control switches are located on the bottom sheet of the unit, easy accessible for the user.
- The control unit regulates the temperature in an increment of 5°F (1°C) and this from 122-212°F (50 to 100°C). The set temperature and the current temperature are shown via the 7-segment display that is located underneath the ceramic glass.

Safety above all:

- RTCSmp electronic temperature control that monitors the state of the induction coil, power board, CPU and the ceramic glass temperature.
- RTCSmp monitors the energy supply.
- **No Pan No Heat - Only if an induction suitable pan is located on the glass that energy will be consumed.**

Options & Accessories

- Optional induction ready holding pans are available, please contact your dealer for sizes and prices. Cable kit: 4m (SKU# 95000246) or 6 m (SKU# 95000247).



CE models comply with the latest European Norms:
EN 60335-1, EN 60335-2-36, EN 62233 (EMC/EMV)

North American models:

ETL recognized in compliance with
UL 197, CSA C22.2 No.109, NSF-4
Complies with FCC part 18, ICES-001



Induction Green Heat

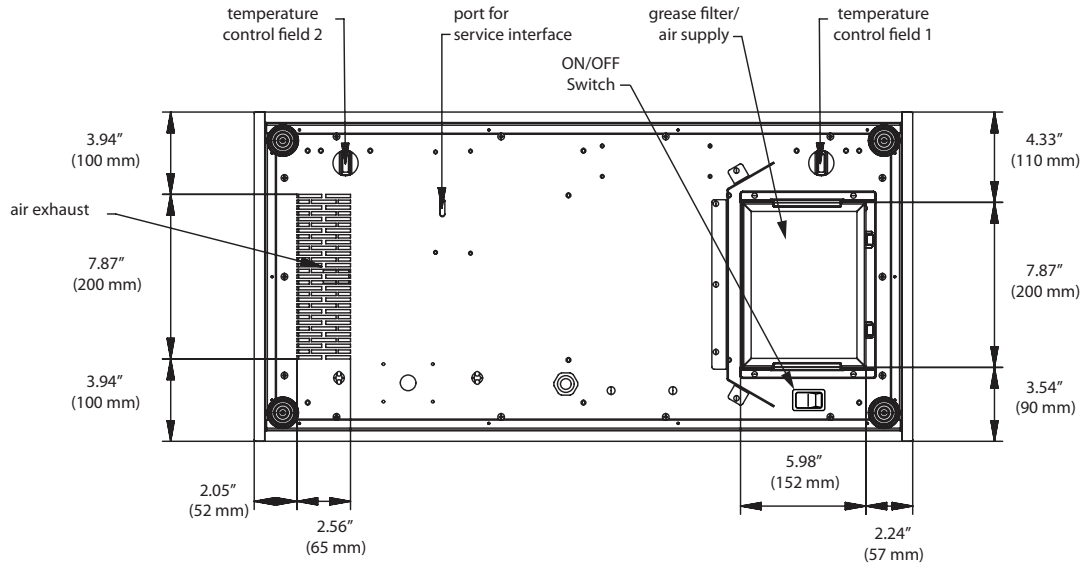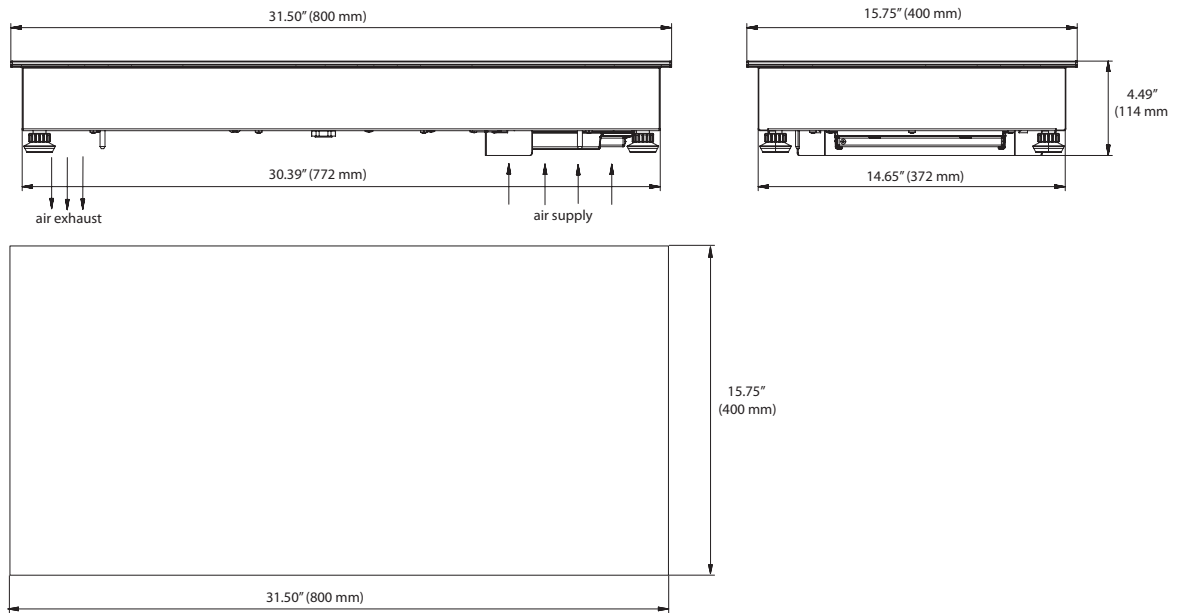

Technical Data

Generator housing: 31.5"x15.75"x4.5" (800x400x114 mm)
 Wattage: 120V, 1Ph, 1500W, 12A
 Quantity of heat retaining zones: 2
 Power per plate: 750W
 Ceran glass: 31.5"x15.75"x0.16" (800x400x4 mm)

Garland/ U.S. Range products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland/ U.S. Range will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Welbilt reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
 1177 Kamato Road,
 Mississauga, Ontario
 L4W 1X4 CANADA

General Inquires 1-905-624-0260
 USA Sales, Parts and Service 1-800-424-2411
 Canadian Sales 1-888-442-7526
 Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
 6846
 12/18