

| PROJECT: | |
|-----------|--|
| ITEM # | |
| MODEL # _ | |

Heavy Duty Cam Lift Hinges With 120 Stay-Open Feature Proximity Door Switch Activates Interior Incandescent Lighting

AIA #

CABINET CONSTRUCTION

Heavy-Duty Cylinder Lock

 Hinged Front Shroud Stainless Steel Breaker Caps **3** Silver Freeze Wire Shelves

FEATURES

Low Profile Vertical Door Handle

• 6" High Adjustable Stainless Steel Legs • 8' Cord And Plug (see electrical data for details)

• Full Electronic Control With Touchpoint Interface

· Built-In, Adjustable Humidity Control Vent Safety Shielded Strip Type Heating Elements

Manager's Lockout Feature

Adjustable Electronic Temp Control From 80°F To 180°F

Externally Mounted Blower Maintains Even Temperatures

Stainless Steel Exterior And Interior 20 Gauge Stainless Steel Door Stainless Steel Interior Door Liner

One Piece, Snap-In Magnetic Door Gaskets

SIS

SOLID DOOR REACH-IN WARMING CABINET

HS-1D-1





- **3 Year Parts & Labor Warrantv**
- **Exclusive 2 Year Warranty On Magnetic Door Gaskets**
- Lifetime Warranty On Handles & Hinges (parts only)

OPTIONS & ACCESSORIES

- Secure-Temp[™] Technology
- · Stainless Steel Back And Shroud
- Stainless Steel Kick Plate • Exterior Door Laminate
- Correctional Package

Tray Slides (type A & A/C)

Door Swing Orientation (at time of order)

Additional Shelves

- Please Verify Qualifying Units By Visiting: www.energystar.gov/cfs
 - 6" Seismic Legs
 - 3" Or 6" Casters

3779 Champion Blvd, Winston-Salem, NC 27105


ph: (888) 845-9800 fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 12/12/22 Printed in U.S.A.

APPROVAL: __

ULTRASPEC SOLID DOOR REACH-IN WARMING CABINET HS-1D-1

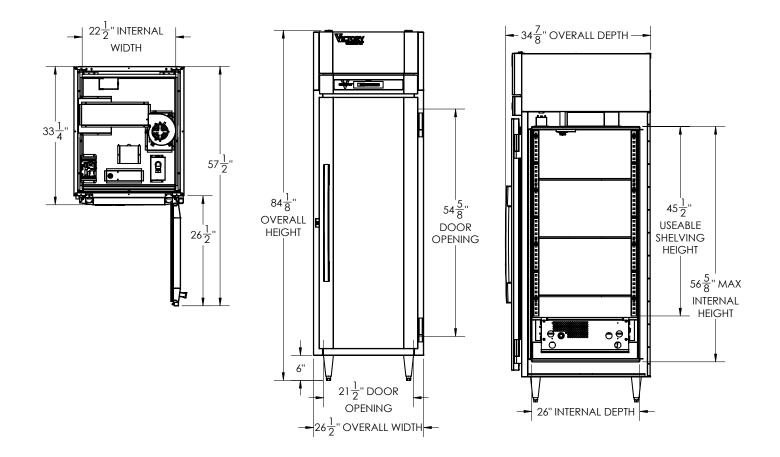

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

| CHARACTERISTICS | | ELECTRICAL DATA | | SHIPPING DETAILS | |
|------------------------------|------------------|---------------------|--------------|------------------|---------|
| Net Capacity (cubic ft.) | 21.5 | Cabinet Voltage | 208-240/60/1 | Height | 87″ |
| Width, Overall (in.) | 26 1/2" | Total Amperes | 6.8 | Width | 35″ |
| Depth, Overall (with handle) | 34 7/8" | NEMA Plug (8' cord) | 6-20P | Depth | 45″ |
| Height Overall (6″ legs) | 84 1/8" | Heater Watts | 1500 | Crated Weight | 488 lbs |
| Depth, Door Open 90° | 57 1/2" | | | | |
| Door Opening (in.) | 211/2" x 54 5/8" |] | | | |
| No. Of Doors/Shelves | 1/3 | | | | |

 3779 Champion Blvd, Winston-Salem, NC 27105
 ph: (888) 845-9800
 fax: (800) 253-5168

 Sales@VictoryRefrigeration.com
 VictoryRefrigeration.com

Rev. 12/12/22 Printed in U.S.A.

an Ali Group Company

