

PROJECT:	
ITEM #	QTY:
MODEL #	
AIA #	SIS #

BOTTOM MOUNT GLASS DOOR DISPLAY FREEZER

LSF27HC-1















- 3 Year Parts & Labor Warranty
- Plus An Additional 4 Year Compressor Warranty Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)

CABINET CONSTRUCTION

- Stainless Steel Exterior (galvanized back)
- **Aluminum Interior**
- LED Lighting
- · High-Performance, Balanced, Bottom-Mounted Refrigeration
- · Triple-Pane Glass Door
- Spring-Loaded Hinge With Stay-Open Door Feature For Easy Product Loading
- · One-Piece, Snap-In Magnetic Door Gasket
- Door Lock Standard
- · Five (5) Heavy-Duty Epoxy Coated Shelves
- · 6" Overall Height Casters Standard
- · Field Reversible Door (hinge kit not included)
- 8' Cord And Plug (see electrical data for details)

FEATURES

- · Full Electronic Control
- · Expansion Valve Technology
- Anti-Condensate Door Perimeter Heaters

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All **Environmental Concerns**
- Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- **Epoxy Coated Evaporator Coil**
- · Freezer Capable Of Maintaining Product Temperature O°F



Please verify qualifying units by visiting: www.energystar.gov/cfs

OPTIONS & ACCESSORIES

- Secure-Temp™ Technology
- · Black Or White Interior · Custom Color Cabinet
- · Electronic Lock Models
- · Door Swing Orientation (at time of order)
- · Additional Shelves


- 3", 6" Casters Or 6" Seismic Legs
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note on back page)

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

Rev. 10/13/21 Printed in the U.S.A.

A DDD 01 / A I	DATE	



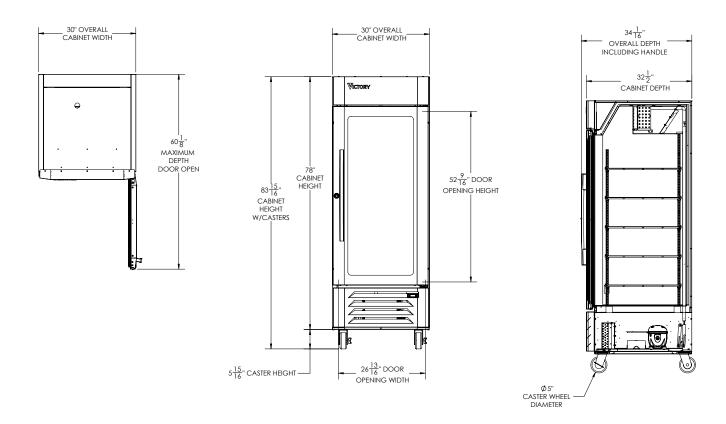

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, $additions \ or \ replacements \ for \ previously \ purchased \ equipment. \ Dimensional \ tolerances \ +/-\ 1/4". \ Metric \ dimensions \ (\ MM)$

CHARACTERISTICS ELECTRICAL DATA			SHIPPING DETAILS		
Net Capacity (cubic ft.)	25.5	Cabinet Voltage	115/60/1	Height	85"
Width, Overall (in.)	30"	Total Amperes	7.5	Width	33"
Depth, Overall (with handle)	34 1/16"	NEMA Plug (8' cord)	5-15P	Depth	36"
Height Overall (with casters)	83 15/16"	REFRIGERATION DATA		Crated Weight	450 lbs
Depth, Door Open 90°	60 1/8"	Condensing Unit Size, HP	3/4	*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at	
Door Opening (in.)	26 13/16" x 52 9/16"	Refrigerant*	R-290		
No. Of Doors/Shelves	1/5	Capacity (BTU/HR) (100°F/20°F)	1927		
		Heat Rejection (BTU/HR) 2890.5 time of order.			
			0.3313/150		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Rev. 10/13/21 Printed in the U.S.A.

