



*The Signature of Quality*

### FEDERAL INDUSTRIES

A Standex Company  
215 Federal Avenue  
Belleville, WI 53508-9201

Phone: 800-356-4206  
Fax: 608-424-3234  
Email: geninfo@federalind.com  
Website: www.federalind.com

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Approval: \_\_\_\_\_

AIA#

SIS#

## HYBRID MERCHANDISER

### SERVICE NON-REFRIGERATED OVER SELF-SERVE REFRIGERATED

MODEL	DIMENSIONS ( Includes End Panels )
<input type="checkbox"/> CD3628/RSS3SC	36.25x 39 x 69.75 (in) 921 x 991 x 1772 (mm)
<input type="checkbox"/> CD4828/RSS4SC	48 x 39 x 69.75 (in) 1219 x 991 x 1772 (mm)
<input type="checkbox"/> (2)CD3628/RSS6SC	72 x 39 x 69.75 (in) 1829 x 991 x 1772 (mm)

Display more product and serve more customers with presentation and value in mind.



### SELF-SERVE NON-REFRIGERATED OVER SELF-SERVE REFRIGERATED

MODEL	DIMENSIONS ( Includes End Panels )
<input type="checkbox"/> CD3628SS/RSS3SC	36.25 x 39 x 69.75 (in) 921 x 991 x 1772 (mm)
<input type="checkbox"/> CD4828SS/RSS4SC	48 x 39 x 69.75 (in) 1219 x 991 x 1772 (mm)
<input type="checkbox"/> (2)CD3628SS/RSS6SC	72 x 39 x 69.75 (in) 1829 x 991 x 1772 (mm)

### STANDARD FEATURES

#### Refrigerated Self-Serve Bottom Display

- Black laminated exterior. Other finishes available.
- Black trim. Silver optional.
- Black interior, glass ends.
- Horizontal LED top and front light.
- Two tiers black metal shelves.
- Electronic temperature control maintains 38° to 40° case temperature. Note: Case temperature will vary if the air curtain is disrupted.
- Cord and plug. (Not available on RSS6SC.)
- Condensate evaporator (separate circuit required on model RSS6SC)
- R513a Refrigerant

#### Service or Self-Serve Non-Refrigerated Top Display

- Two tiers black wire shelves.
- Sliding rear doors.
- Black trim.
- Self-Serve has three hinged lift-up front doors.

#### Lighting

- LED top light and shelf lights.

#### Agency Approvals

- UL Safety and UL Sanitation Listed to NSF Type II conditions.
- DOE 2017 Compliant

### OPTIONAL ACCESSORIES

#### For Top Display

- Glass Shelves
- Reflective Ends
- Reflective Rear Doors

#### For Self-Serve Refrigerated Base

- Energy Saving Night Curtain
- Silver Trim
- Special Base Finish
- Mirrored Interior Ends
- Security Night Cover
- Stainless Steel Steps in Lieu of Metal Shelves
- Reflective End Glass



**WARRANTY\***  
One year Parts and Labor  
2nd thru 5th year part  
only service compressor  
(U.S.A and Canada)

Note: Information is subject to change at any time.  
Visit [www.federalind.com](http://www.federalind.com) for the most current specs.

Revised 02/18/2020

AIA#	<b>HYBRID MERCHANDISER</b>
SIS#	<b>Product Specifications</b>



Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)  
 DIMENSION TOLERANCE +/- 0.19 (4.8)

**SERVICE NON-REFRIGERATED  
 OVER SELF-SERVE REFRIGERATED**

**SELF-SERVE NON-REFRIGERATED  
 OVER SELF-SERVE REFRIGERATED**

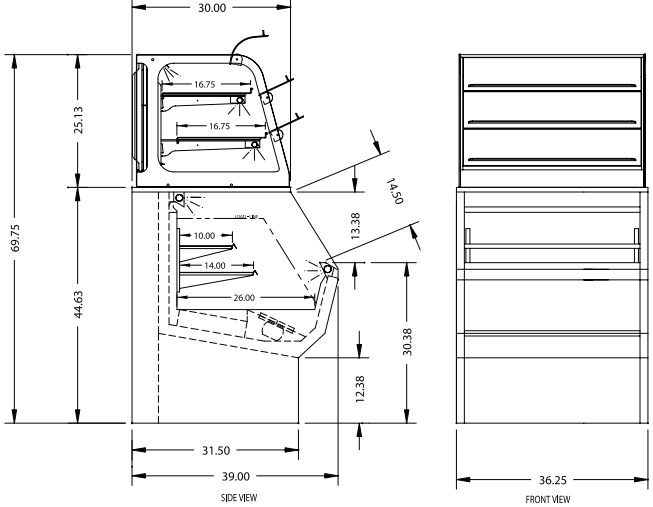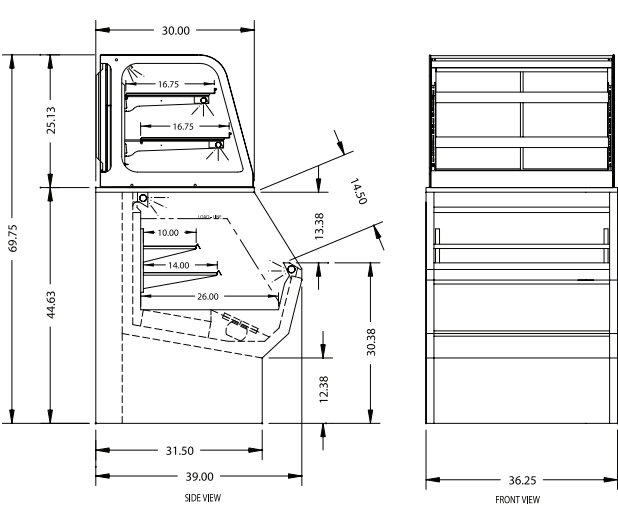

MODEL	DIMENSIONS				SHIPPING WHT		BOTTOM DISPLAY	TOP DISPLAY
	L	D	H	UNITS	LBS	KILO	120/60/1 (NEMA 5-20P)	120/60/1 (NEMA 5-15P)
CD3628/RSS3SC	36.25	39	69.75	in.	847	384	1/3 HP - 14.8 AMPS	1.5 AMPS
	921	991	1772	mm.				
CD4828/RSS4SC	48	39	69.75	in.	1,010	458	1/2 HP - 16.0 AMPS	1.5 AMPS
	1219	991	1772	mm.				
(2)CD3628/RSS6SC*	72	39	69.75	in.	1,500	680	3/4 HP - 16.0 AMPS	(2) 1.5 AMPS
	1829	991	1772	mm.				
CD3628SS/RSS3SC	36.25	39	69.75	in.	790	358	1/3 HP - 14.8 AMPS	1.5 AMPS
	921	991	1772	mm.				
CD4828SS/RSS4SC	48	39	69.75	in.	900	408	1/2 HP - 16.0 AMPS	1.5 AMPS
	1219	991	1772	mm.				
(2)CD3628SS/RSS6SC*	72	39	69.75	in.	1,300	590	3/4 HP - 16.0 AMPS	(2) 1.5 AMPS
	1829	991	1772	mm.				

\* On the RSS6SC a separate 120/60/1 15 AMP circuit is required for the condensate evaporator.  
 ■ If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI recepticle.  
 ■ Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.  
 ■ Due to continuing engineering improvements, specifications are subject to change without notice.a



**FEDERAL INDUSTRIES**  
 A Standex Company  
 215 Federal Avenue Belleville, Wisconsin 53508-9201

**Phone:** 800-356-4206  
**Fax:** 608-424-3234  
**Email:** Geninfo@Federalind.com  
**Website:** Federalind.com