

## **FEDERAL INDUSTRIES**

A Standex Company 215 Federal Avenue Belleville, WI 53508-9201

Phone: 800-356-4206 Fax: 608-424-3234

Email: geninfo@federalind.com Website: www.federalind.com

Project Name:	AIA#
Item #:	
Model #: Qty:	SIS#
Approval:	

# **CURVED GLASS HORIZONTAL DUAL ZONE CASE**

Sleek curved-glass styling blends with traditional design elements to maximize performance.



MODEL	<b>DIMENSIONS</b> (Includes End Panels)
□ CGR3660DZH	36.13 x 35.31 x 60 (in)
	918 x 897 x 1524 (mm)
□ CGR5060DZH	50.13 x 35.31 x 60 (in)
	1273 x 897 x 1524 (mm)
□ CGR5960DZH	59.13 x 35.31 x 60 (in)
	1502 x 897 x 1524 (mm)
□ CGR7760DZH	77.13 x 35.31 x 60 (in)
	1959 x 897 x 1524 (mm)

## STANDARD FEATURES

## **Model Features**

- Curved glass styling.
- Bottom section refrigerated, top section non-refrigerated.
- Removable sliding rear doors, shelf lights, shelf supports, and shelves.
- Steel base construction with a choice of six standard laminates on base. Other finishes optional.
- Black trim.
- White scratch-resistant display decks.
- Adjustable Leg Levelers

## **Added Features for Refrigerated Side**

- Condenser air filter on self-contained units.
- Thermometer.
- Condensate evaporator provided for a totally selfcontained system.
- Oversized coil and low-velocity fan system maintains high humidity and product freshness.
- Easy clean, rustproof insulated evaporator coil compartment.
- Adjustable temperature control.
- Average case temperature of 38° to 40° is maintained.
- Rear access of the refrigeration system for quick and easy service.
- R513a Refrigerant.

## Shelving

 Adjustable white wire shelves. Shelves are adjustable up and down and can also be tilted in two positions.

## Lighting

- 3000K LED top light and shelf lights.
- DLC Certified , IP66 rated

#### **Agency Approvals**

- UL Safety and UL Sanitation listed
- DOE 2017 Compliant

# **OPTIONAL ACCESSORIES**

- ☐ Special Base Finish
- ☐ Glass Shelves
- □ Rear Wrapping Board
- □ Cord & Plug
- □ Remote Condensing Unit (449a Refrigerant, EEV Included)
- □ Black, Gold, or Chrome Wire Shelves
- □ Reflective Ends

- ☐ White or Mirrored Interior EndsWith Laminated Exterior
- ☐ Reflective Rear Doors
- ☐ Casters/Cord & Plug Included (Self-Contained Models Only)
- □ Legs
- □ Package Shelf
- $\hfill\Box$  LED Light Below Package Shelf









AIA#

# **CURVED GLASS HORIZONTAL DUAL ZONE CASE**

SIS#


**Product Specifications** 

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)

**DIMENSION TOLERANCE +/- 0.25 (6.4)** 

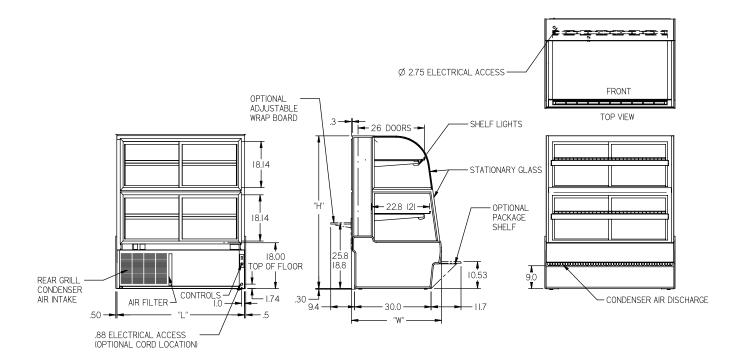

MODEL	DIMENSIONS				SELF-CONTAINED	REMOTE	NEMA
	L	D	H1	UNITS	Permanently Connected	120/60/1	PLUG
CGR3660DZH	36.13	35.31	60	in.	1/3 HP - 8.0 AMPS	2.3 AMPS	NEMA 5-15P
	918	897	1524	mm.			
CGR5060DZH	50.13	35.31	60	in.	1/2 HP - 10.5 AMPS	2.3 AMPS	NEMA 5-15P
	1273	897	1524	mm.			
CGR5960DZH	59.13	35.31	60	in.	1/2 HP - 12.0 AMPS	2.5 AMPS	NEMA 5-15P
	1502	897	1524	mm.			
CGR7760DZH	77.13	35.31	60	in.	3/4 HP - 15.4 AMPS	3.3 AMPS	NEMA 5-20P
	1959	897	1524	mm.			

- If a GFCI circuit is required, a GFCI Breaker MUST be used instead of GFCI receptacle.
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.











**Phone:** 800-356-4206 **Fax:** 608-424-3234

**Email:** Geninfo@Federalind.com **Website:** Federalind.com