



*The Signature of Quality*

### FEDERAL INDUSTRIES

A Standex Company  
215 Federal Avenue  
Belleville, WI 53508-9201  
Phone: 800-356-4206  
Fax: 608-424-3234  
Email: geninfo@federalind.com  
Website: www.federalind.com

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_

Model #: \_\_\_\_\_ Qty: \_\_\_\_\_

Approval: \_\_\_\_\_

AIA#

SIS#

## ELEMENTS COUNTERTOP REFRIGERATED SERVICE & SELF-SERVE MERCHANDISERS

### REFRIGERATED SERVICE

#### REAR MOUNT

MODEL	DIMENSIONS ( Includes End Panels )
<input type="checkbox"/> ERR3628	36 x 29.7 x 27.83 (in) 914 x 754 x 707 (mm)
<input type="checkbox"/> ERR4828	48 x 29.7 x 27.83 (in) 1219 x 754 x 707 (mm)

### REFRIGERATED SELF-SERVE

#### REAR MOUNT

MODEL	DIMENSIONS ( Includes End Panels )
<input type="checkbox"/> ERR3628SS	36 x 29.7 x 37.7 (in) 914 x 754 x 958 (mm)
<input type="checkbox"/> ERR4828SS	48 x 29.7 x 37.7 (in) 1219 x 754 x 958 (mm)

The Elements counter top merchandiser provides value without sacrificing performance.



### STANDARD FEATURES

#### Model Features

- Tempered thermopane front glass. Solid end panels.
- Removable sliding rear doors, shelf lights, shelf supports, and shelves.
- Removable, scratch-resistant, rustproof black display deck.
- Easily accessible light switch and adjustable temperature control.
- Average case temperature
- Black trim.
- Stainless steel mirrored interior end panels.
- Cord and plug (six foot).
- Installation without recessing into counter.
- Set directly on counter with condensing component mounted on rear.
- Self-serve models with lift-up front doors.

#### Refrigeration

- Thermometer.
- Condensate evaporator provided for a totally self-contained system.
- Average case temperature of 38° (3.3°C) to 40° F (4.4°C).
- R513a Refrigerant.

#### Shelving

- Black shelves are adjustable up and down and can also be tilted in two positions. Two tiers.

#### Lighting

- 3500k LED top light and shelf lights.
- DLC Certified, IP66 rated.

#### Agency Approvals

- UL Safety and UL Sanitation Listed.
- DOE 2017 Compliant



WARRANTY\*  
One year Parts and Labor  
2nd thru 5th year part  
only service compressor  
(U.S.A and Canada)

Note: Information is subject to change at any time.  
Visit [www.federalind.com](http://www.federalind.com) for the most current specs.

Revised 02/18/2020

AIA#

## ELEMENTS COUNTERTOP REFRIGERATED SERVICE &amp; SELF-SERVE MERCHANDISERS

SIS#


## Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Avg Prod Temp °F/°C
All	Packaged Refrigerated Products	38°F / (3.3°C)

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.19 (4.8)

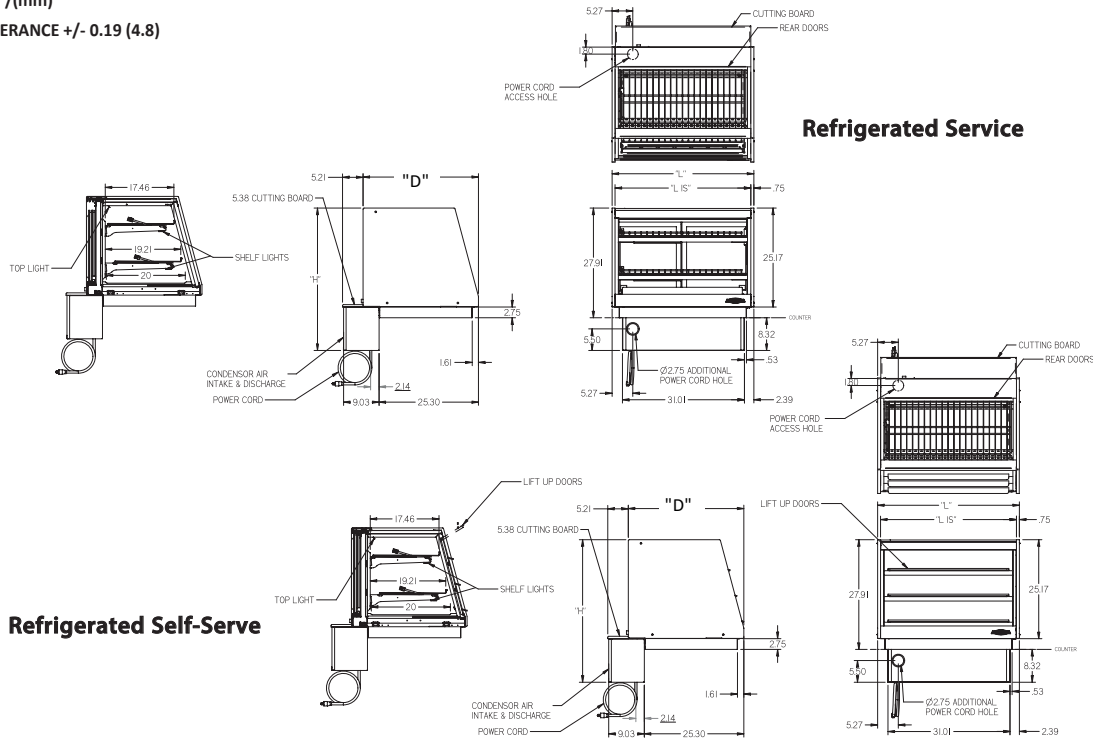

Refrigerated Service

Refrigerated Self-Serve

MODEL	DIMENSIONS				SHIPPING WHT		SELF-CONTAINED 120/60/1
	L	D	H	UNITS	LBS	KILO	
<b>REFRIGERATED SERVICE REAR MOUNT</b>							
ERR3628	36	29.7	27.83	in.	390	177	8.1 AMP
	914	754	707	mm.			
ERR4828	48	29.7	27.83	in.	450	204	8.3 AMP
	1219	754	707	mm.			
<b>REFRIGERATED SELF-SERVE REAR MOUNT</b>							
ERR3628SS	36	29.7	37.7	in.	430	195	8.1 AMP
	914	754	958	mm.			
ERR4828SS	48	29.7	37.7	in.	508	230	8.3 AMP
	1219	754	958	mm.			

- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.
- Refrigerated cases are designed to operate in a maximum of 75°F (24°C) ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.

DOE 2017  
Energy Efficiency  
Compliant



The Signature of Quality®

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue, Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com