

KD Wall Shelf



Item #:	Qty #:
Model #: _	
Project #:	

FEATURES:

Furnished with a 1-5/8" Bullnose edge with a 1-1/4" turn-up edge on sides and rear.

Unit is easily assembled employing the slip-fit TAB-LOK design.

CONSTRUCTION:

Shelf and brackets are die stamped and die formed.

MATERIAL:

WS-KD Series - 18 gauge stainless steel polished to a satin finish.

AWS-KD Series - Heavy gauge aluminum.

S/S	ALUMINUM	length
WS-KD-24	AWS-KD-24	24"
WS-KD-36	AWS-KD-36	36"
WS-KD-48	AWS-KD-48	48"
WS-KD-60	AWS-KD-60	60"

Standard Wall Shelf

FEATURES:

Brackets can be positioned to accomodate wall studs.

Furnished with a 1-5/8" Bullnose edge with a 1-1/2" turn-up edge at rear. Ends are turned down square.

CONSTRUCTION:

Secured to wall by means of bolts through support brackets.

Units 7 ft. and larger are furnished with 3 brackets.

MATERIAL:

16 Gauge Series - 304 stainless steel polished to a satin finish.

18 Gauge Series - 430 stainless steel polished to a satin finish.



10" \ 16 Ga.	Wide 18 Ga.	12" V 16 Ga.	Vide 18 Ga.	15" W 16 Ga.	/ide 18 Ga.	18" \ 16 Ga.	Wide 18 Ga.	Approx. Wt.	Approx. Cubes
WS-10-24-16	WS-10-24	WS-12-24-16	WS-12-24	WS-15-24-16	WS-15-24	WS-18-24-16	WS-18-24	10 lbs.	3
WS-10-36-16	WS-10-36	WS-12-36-16	WS-12-36	WS-15-36-16	WS-15-36	WS-18-36-16	WS-18-36	12 lbs.	4
WS-10-48-16	WS-10-48	WS-12-48-16	WS-12-48	WS-15-48-16	WS-15-48	WS-18-48-16	WS-18-48	14 lbs.	5
WS-10-60-16	WS-10-60	WS-12-60-16	WS-12-60	WS-15-60-16	WS-15-60	WS-18-60-16	WS-18-60	17 lbs.	6
WS-10-72-16	WS-10-72	WS-12-72-16	WS-12-72	WS-15-72-16	WS-15-72	WS-18-72-16	WS-18-72	19 lbs.	7
WS-10-84-16	WS-10-84	WS-12-84-16	WS-12-84	WS-15-84-16	WS-15-84	WS-18-84-16	WS-18-84	22 lbs.	8
WS-10-96-16	WS-10-96	WS-12-96-16	WS-12-96	WS-15-96-16	WS-15-96	WS-18-96-16	WS-18-96	26 lbs.	10
WS-10-108-16	WS-10-108	WS-12-108-16	WS-12-108	WS-15-108-16	WS-15-108	WS-18-108-16	WS-18-108	28 lbs.	11
WS-10-120-16	WS-10-120	WS-12-120-16	WS-12-120	WS-15-120-16	WS-15-120	WS-18-120-16	WS-18-120	31 lbs.	12
WS-10-132-16	WS-10-132	WS-12-132-16	WS-12-132	WS-15-132-16	WS-15-132	WS-18-132-16	WS-18-132	35 lbs.	13
WS-10-144-16	WS-10-144	WS-12-144-16	WS-12-144	WS-15-144-16	WS-15-144	WS-18-144-16	WS-18-144	38 lbs.	14

Length = 24" to 144" in 12" increments.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

For Orders & Customer Service:


For Smart Fabrication™ Quotes:

Email: customer@advancetabco.com or Fax: 631-242-6900


Email: smartfab@advancetabco.com or Fax: 631-586-2933

TOL ± .500" ALL DIMENSIONS ARE TYPICAL


KD WALL SHELF



STANDARD WALL SHELF

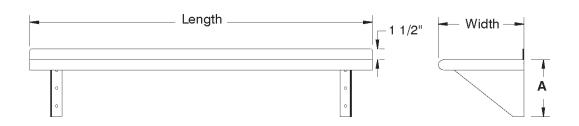

Width	Α		
10"	8 1/2"		
12"	10 1/2"		
15"	13 1/2"		
18"	16 1/2"		



Requirements for NSF Installations

- 1. Install at least 60" above floor.
- 2. Limit to dry storage.
- 3. Avoid contact with liquids.
- 4. For "Ganging-Up" installation, allow at least 2" between units or mount units side by side and seal joints with an approved sealant.

