

SEALED WELL ELECTRIC TABLES WITH ENCLOSED BASE AND DOORS



SW-5E-240-DR



Sealed Well with Drain

Item #: _____ Qty #: _____
 Model #: _____
 Project #: _____



Optional TA-255P
Casters Available

FEATURES:

- Stainless steel undershelf
- Fiberglass insulation between each compartment
- Drains with gate valves per well for use with water
- Stainless steel 8" support shelf with removable 3/8" thick poly cutting board - Ships K.D.

MATERIAL:

- TOP:** 20 gauge #302 stainless steel with die stamped pan openings. (11.875" x 20.062")
- BODY:** 22 gauge #430 stainless steel
- BASE:** 18 gauge stainless steel with fully adjustable stainless steel bullet foot
- UNDERSHELF:** 22 gauge #430 stainless steel
- LINERS:** 20 Gauge stainless steel deep drawn with drain
- CUTTING BOARD:** White Thermoplastic
- CUTTING BOARD BRACKETS:** 16 gauge, #302 stainless steel

ELECTRICAL:

- 120V units yield 640 Watts
- 208V/240V dual voltage units yield 825 Watts at 208V and 1100 Watts at 240V
- 6' electrical cord with plug
- Infinite control knobs
- Indicator lights



Model #	Length	Width*	# of Wells	Volts	True Amps/ Watts Per Unit	NEMA Plug	Wt.	Cu. Ft.
SW-2E-120-DR	A = 31-13/16"	30-5/8"	2	120	10.67/1280	5-20P	127 lbs.	28
SW-3E-120-DR	B = 47-1/8"	30-5/8"	3	120	16/1920	5-20P	155 lbs.	41
SW-4E-120-DR	C = 62-7/16"	30-5/8"	4	120	21.33/2560	L5-30P	197 lbs.	54.55
SW-2E-240-DR	A = 31-13/16"	30-5/8"	2	208/240	9.17/2200	6-20P	127 lbs.	28
SW-3E-240-DR	B = 47-1/8"	30-5/8"	3	208/240	13.75/3300	6-20P	155 lbs.	41
SW-4E-240-DR	C = 62-7/16"	30-5/8"	4	208/240	18.33/4400	L6-30P	197 lbs.	54.55
SW-5E-240-DR	D = 77-3/4"	30-5/8"	5	208/240	22.92/5500	L6-30P	215 lbs.	66.94

*Width Includes 8" Cutting Board

NOTE: Units are not designed to cook or heat frozen or refrigerated foods. Food placed in tables should already be hot, and the table will maintain the proper temperatures

NEMA PLUGS: Your plug will look like this...




NEMA 5-20P



NEMA 6-20P



NEMA L5-30P




NEMA L6-30P

NOTE: For international applications, plug may need to be replaced (by others) in field.

DIMENSIONS and SPECIFICATIONS

TOL ± .125"

ALL DIMENSIONS ARE TYPICAL

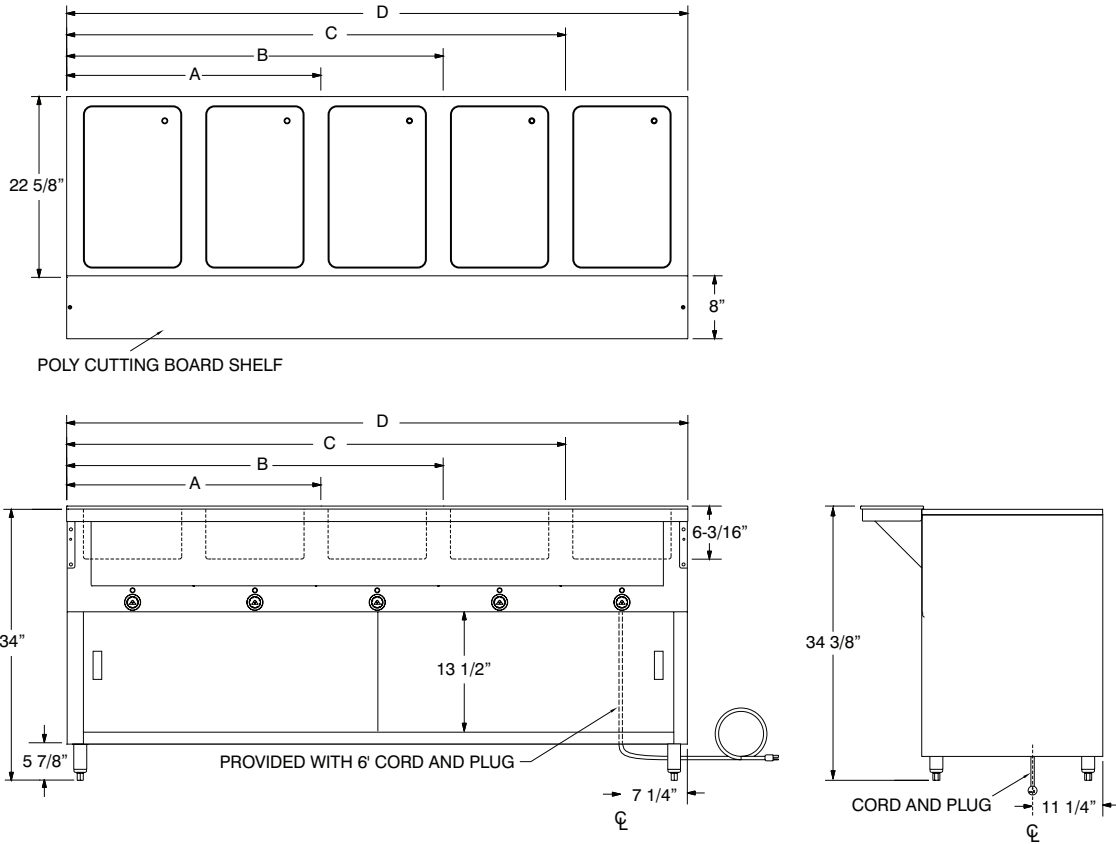

19-1/4" Height
Acrylic Food Shield has 10" Clearance from Deck
Double Sided Self-Serve Buffet Shelf with Built-In Food Shield

Model	Length	Approx Wt.	Cu. Ft.
TBS-2	31-13/16"	34 lbs.	2
TBS-3	47-1/8"	42 lbs.	3
TBS-4	62-7/16"	47 lbs.	4
TBS-5	77-3/4"	55 lbs.	4

Acrylic Side Panels for Buffet Shelf
Add side panels to meet additional NSF requirements (2 panels per end)
TBP-1 One end
TBP-2 Two Ends
Field Installation Available

Food Table Accessories

Visit our website for additional Food Table Accessories

SEALED WELL REPLACEMENT PARTS

- T Thermostatic Control (Per Well)
- M Manifold Drains (Per Well)



TA-255P Add Casters to Enclosed Base Food Units
(Includes 4 -5" Swivel Casters, 2 w/ Brakes)

TA-255P Add Casters to Enclosed Base Food Units
(Includes 4 -5" Swivel Casters, 2 w/ Brakes)

SU-45A 12" x 1" Adapter Bar

SU-45B 20" x 3" Adapter Bar

K-49 Filler Faucet for Hot Tables (Hot water supply only. Requires -M Manifold Drain & SU-15 Prepare for Filler Faucet Provision)

SU-15 Prepare Hot food Table For Filler Faucet (For Gas Units. Excludes Wetbath Units)

