



PROJECT NAME: _____

LOCATION: _____

ITEM: _____ QTY: _____

MODEL: _____

SRTG SERIES

ELECTRIC THERMOSTAT GRIDDLES

Sierra electric griddles are designed to be reliable, efficient and accurate. Each 12" section has its own independent temperature control providing even cooking of a variety of products at the same time.

SRTG-36E



1" thick steel griddle plate, 4000W element every 12",
s/s exterior, galvanized back, 4" grease trough


*Stainless steel front and sides

STANDARD FEATURES

- Operates on 208/240V/50/60Hz (See specs on next page), 50/60Hz Per 12" section of griddle, 3kW at 208V; 4kW at 240V
- 1" thick cooking surface
- Temperature controlled by snap-action thermostats from 150°F (66°C) up to 450°F (232°C).
- One grease drawer on 12" 24" 36" models, two grease drawers on 48" models
- Stainless steel front and side
- Supplied with 4" (102 mm) legs that are adjustable up to 1.375" (35 mm)
- 20.7" Cooking depth
- Independent thermostat every 12"

 3560 NW 56th Street
Fort Lauderdale, FL 33309


Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100

 5659 Royalmount Avenue
Montreal, QC, Canada H4P 2P9

Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com




www.mvpgroupcorp.com

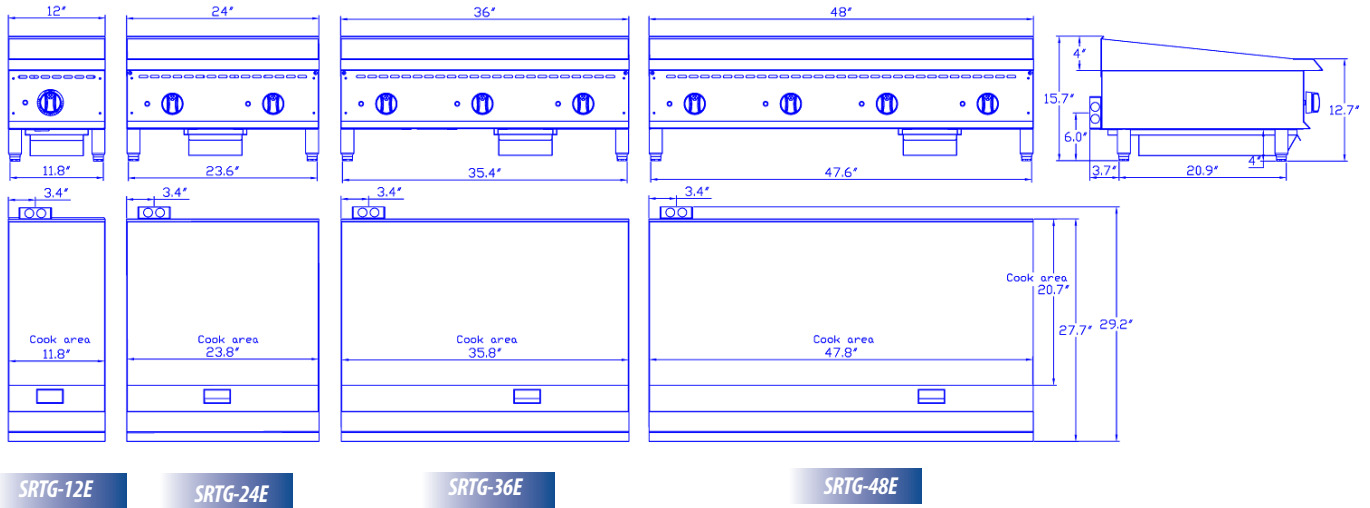

SPECIFICATIONS

| MODEL NUMBER | EXTERNAL DIMENSIONS ^{WxDxH} | NET WEIGHT | SHIPPING WEIGHT |
|--------------|--------------------------------------|------------|-----------------|
| SRTG-12E | 12" X 29.2" X 15.7" | 104LBS | 125 LBS |
| SRTG-24E | 24" X 29.2" X 15.7" | 178 LBS | 235 LBS |
| SRTG-36E | 36" X 29.2" X 15.7" | 253 LBS | 335 LBS |
| SRTG-48E | 48" X 29.2" X 15.7" | 348 LBS | 440 LBS |

ALL SRTG-E'S

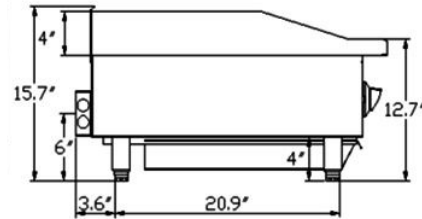

| MODEL NUMBER | PHASE | VOLTAGE | RATED WATTAGE | WIRE CONNECT | NOMINAL AMPS PER LINE | FOR SUPPLY USE WIRE SIZE SHOWN OR LARGER |
|--------------|--------------------------|-----------|---------------|--------------|--|--|
| SRTG-12E | Single phase dual supply | 208 240 | 3000 4000 | - | 14.44 16.66 | AWG #14 AWG#14 |
| SRTG-24E | Single phase dual supply | 208 240 | 6000 8000 | | 28.88 33 | AWG #10 AWG#8 |
| | Three phase dual supply | 208 240 | 6000 8000 | X Y Z X Y Z | 14.44 25 14.4 16.7 28.9 16.7 | AWG #16 AWG#12 AWG#16 AWG #14 AWG#10 AWG#14 |
| SRTG-36E | Single phase dual supply | 208 240 | 9000 12000 | X-Y X-Y | 43 50 | AWG #6 AWG#6 |
| | Three phase dual supply | 208 240 | 9000 12000 | X Y Z X Y Z | 25 25 25 28.9 28.9 28.9 | AWG#12 AWG#10 |
| SRTG-48E | Three phase dual supply | 208 240 | 12000 16000 | X Y Z X Y Z | 38.2 38.2 25 44.2 44.2 29 | AWG #6 AWG#6 AWG#8 AWG #6 AWG#6 AWG#8 |

Warranty: 12 months parts & labor.

Combustible Clearances: For use in non-combustible locations | Non-combustible Clearances: 0 inches sides, 0 inches rear

SIERRA RANGE is a registered trademark of **MVP Group**.

Due to continuing product development, to ensure best possible performance, the specifications are subject to change without prior notice. FOR SUPPLY CONNECTIONS USE COPPER WIRE ONLY, SUITABLE FOR AT LEAST 90°C (194°F). USE WIRE GAUGE SHOWN OR LARGER.



3560 NW 56th Street
Fort Lauderdale, FL 33309

Tel.: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100

5659 Royalmount Avenue
Montreal, Qc, Canada H4P 2P9

Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832

sales@mvpgroupcorp.com



www.mvpgroupcorp.com