2001 East Terra Lane • O'Fa Fax (636)272-2408 • Toll Free Parts Dept. (800)424-TRUE • Parts Model:	TRUE MANUFACTURING CO., IR U.S.A. FOODSERVICE DIVISION Ilon, Missouri 63366-4434 • (636)240-2400 (800)325-6152 • Intl Fax# (001)636-272-7546 s Dept. Fax# (636)272-9471 • www.truemfg.cor Full Length Merchandise Swing Door Freezer with Hydroca	Location: Item #: Model #: r:	Qty:	AIA # SIS #
			 FLM-54F~TSL The world's #1 manufacturer of g merchandisers. Factory engineered, self-contain capillary tube system using environmentally friendly R290 h carbon refrigerant that has zero depletion potential (ODP), & thra global warming potential (GWP) High capacity, factory balanced refrigeration system that mainta (-23.3°C) temperatures. Ideal for frozen foods and ice cream. Exterior - non-peel or chip black coated cold rolled steel ends wit aluminum cabinet top and back and permanent. Interior - attractive, white alumir interior liner with stainless steel Double pane thermal insulated doors with black powder coated Full length doors for maximum p capacity. Self closing doors. Positive seal, t type closure system. 	glass door ed, ydro (0) ozone ee (3) ins -10°F both powder h black ; durable floor. glass swing frames. product
	Exterior Color Options		LED interior lighting provides milighting throughout the cabinet	ore even . Safety
			 shielded. Entire cabinet structure is foame place using a high density, polytinsulation that has zero ozone di potential (ODP) and zero global potential (GWP). Bottom mounted units feature: "No stoop" lower shelf to maxim product visibility. Storage on top of cabinet. Easily accessible condenser coil to cleaning. 	urethane epletion warming ize
Standard Black Exterior	Optional White Exterior Opti	onal Stainless Exterior	cleaning.	
ROUGH-IN DATA	· ·		Specifications subject to change wi	thout notice

DOI		
ROL	'GH-IN	$\square \Delta I \Delta$
100		

Chart dimensions rounded up to the nearest %" (millimeters rounded up to next whole number).

			Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (lbs.)	
Model	Doors	Shelves	W	D†	Н	HP	Voltage	Amps	Config.	(total m)	(kg)
FLM-54F~TSL01	2	8	53%	30¾	79	1⁄2	115/60/1	13.1	5-20P	9	725
			1369	772	2007	N/A		N/A		2.74	329

† Depth does not include 1⁵/₈" (42 mm) for door handles.

MADE WITH IN THE USA	APPROVALS:	AVAILABLE AT:
10/21 Printed in U.S.A.		

Model:

FLM-54F~TSL01

Full Length Merchandiser: Swing Door Freezer with Hydrocarbon

Refrigerant~True Standard Look Version 01



STANDARD FEATURES

DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains -10°F (-23.3°C) temperatures. Ideal for both frozen foods and ice cream.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Bottom mounted condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to higher level.

CABINET CONSTRUCTION

- Exterior non-peel or chip black powder coated cold rolled steel ends with black aluminum cabinet top and back; durable and permanent.
- Interior attractive, white aluminum liner with stainless steel floor.

- Insulation entire cabinet structure is foamedin-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
- Frame rail fitted with leg levelers.

DOORS

- Double pane thermal insulated glass swing doors with black powder coated frames.
- Door sign decal. Variety of decal options available.
- Each door fitted with 12" (305 mm) long extruded handle.
- Self closing doors. Positive seal, torsion type closure system.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

SHELVING

- Eight (8) adjustable, solid white powder coated cantilever shelves, adjustable for up to 15° tilt in 5° increments. Two (2) white PVC coated wire floor racks.
- Shelves are 24 ½ "L X 21"D (623mm x 534 mm). Floor racks are 22 ½ "L X 20 ½ "D (575mm x 591mm)

LIGHTING

 LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and sign offerings.

- Convenient clean-out drain built in cabinet floor.
- NSF/ANSI Standard 7 compliant for open food product.

ELECTRICAL


- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 20 amp dedicated outlet.
- Unit utilizes a dual compressor system rated at ½ HP each.
- Cord and plug set included.



OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply.

- U White exterior.
- □ Stainless steel exterior.
- Black aluminum interior liner with black shelving.
- Clear aluminum interior liner.
- □ Stainless steel interior liner.
- All left hinge doors.
- All right hinge doors.
- Wired cantilever shelves.
- Barrel locks located in grill assembly (requires one per door)
 - Additional shelves.
 - □ Product ID strips on shelves and floor racks.

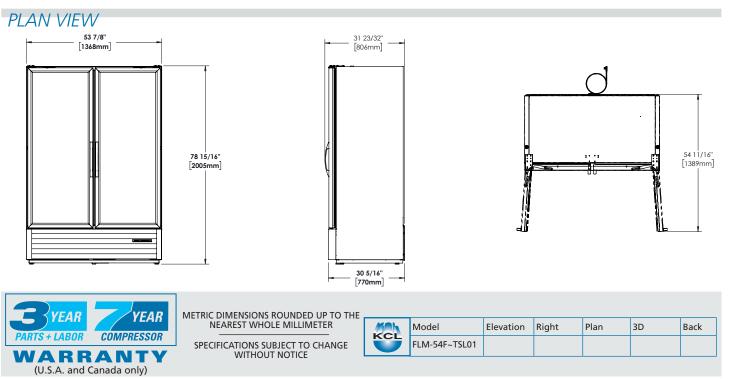

TRUE MANUFACTURING CO., INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com