# Tray Drying Racks
Stainless Steel

Spec. # _____

Dry, Transport and Store Up To 80 Trays

- Rugged all-welded frame of angle stainless steel

- Removable tray racks with efficient drainage

- Support shelves include perforated drain holes

- Accommodates 14" x 18", 15" x 20", and 16 x 22" trays

- Rolls easily on 5" non-marking swivel casters

- Corner mount stem casters provide upright stability

Model 868

AIA # _____

Removable Tray Holder

Specifications:

Shall be Lakeside Model (#867, #868) and shall be of welded stainless steel construction. Unit shall feature welded frame of 11-gauge 1" x 1" angle. Four each solid shelves shall be of 14-gauge stainless steel with holes for drainage and shall accommodate two or three removable stainless steel tray holders. Tray holders shall have vertical 18-gauge stainless steel tray support fins and shall have an 18-gauge slanted 'V' base with center holes to provide water drainage. Unit shall accommodate 14" x 18", 15" x 20" or 16" x 22" trays up to 2½" thick. Casters shall be corner stem-mount, all-swivel, with 5" non-marking cushion tread wheels.
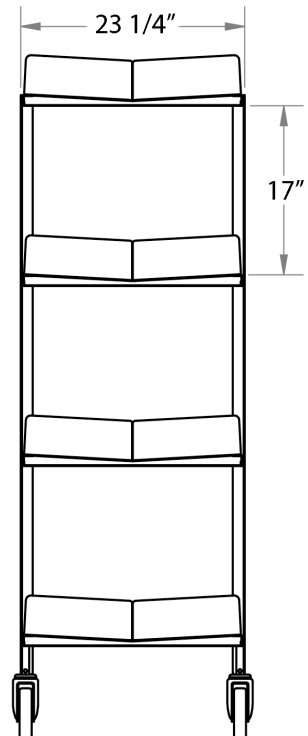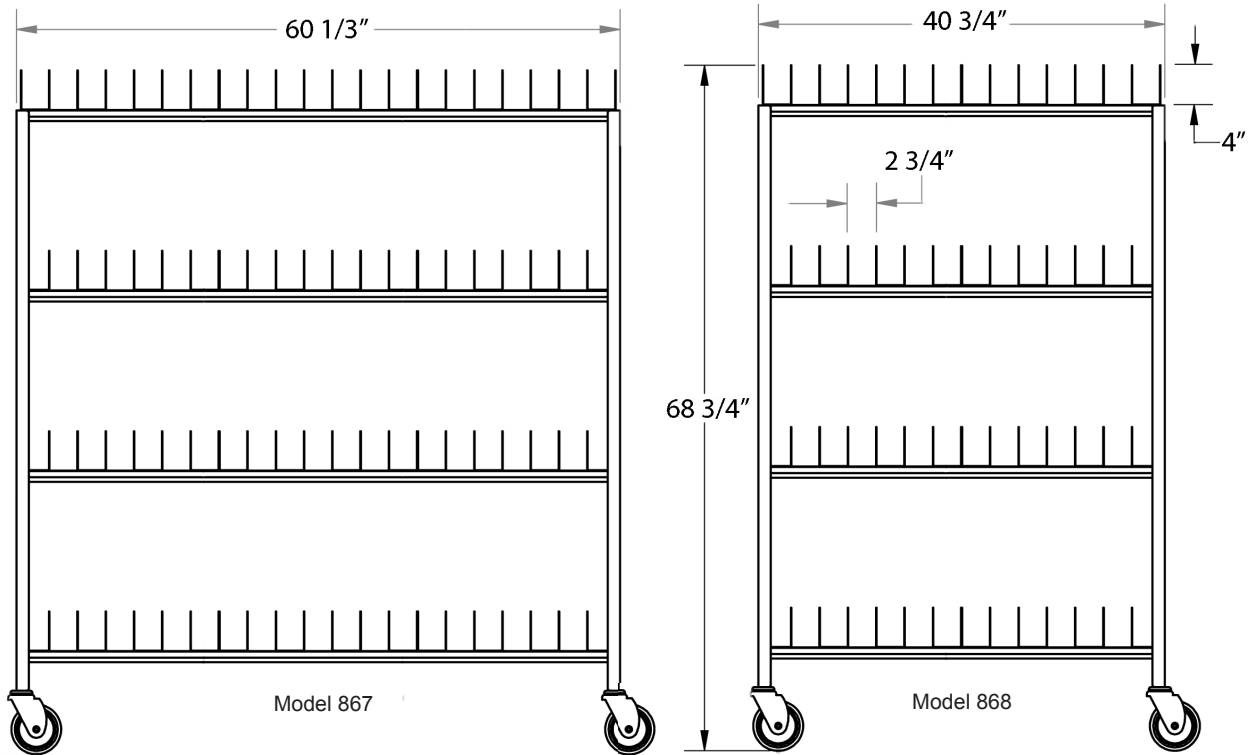
LAKESIDE®

MOVING FOODSERVICE FORWARD™

Lit #TDR 0910   Lakeside reserves the right to modify specifications or discontinue models without prior notification.   Printed in the U.S.A.

DR-1

KaTom Restaurant Supply, Inc.

Tray Drying Racks
Stainless Steel

60 1/3"

68 3/4"

Model 867

40 3/4"

4"

2 3/4"

Model 868

23 1/4"

17"

Dimensions:

| Model | Overall Size | | | Tray Capacity | Casters | | Case Wt. |
	W	D	H		Type	Dia.	Lbs.
867	60 1/3" (1532	23 1/4" 591	68 3/4" 1746)	80 Ea.	All Swivel Stem	5" (127)	440 (198 kg)
868	40 3/4" (1035	23 1/4" 591	68 3/4" 1746)	56 Ea.	All Swivel Stem	5" (127)	320 (144 kg)

Dimensions in ( ) denote metric milimeters, unless otherwise noted.

Options:

- Corner bumpers

LAKESIDE®
MOVING **FOODSERVICE** FORWARD™

DR-1

KaTom Restaurant Supply, Inc.

Spec. #

AIA #