

Multi Contact Grills

Models: MCG10G, MCG14G, MCG20G MCG10S, MCG14S, MCG20S MCG10GS, MCG14GS, MCG20GS

Hatco Corporation introduces the Multi Contact Grill as a new addition to our light cooking line of equipment that gives you the flexibility to grill paninis, sandwiches with breads of different sizes and thickness, snacks, vegetables, meats, guesadillas, fish, and hamburgers, to name a few, all on the same piece of equipment!

Standard features

- Patented Heating Element Pack provides exceptional heat distribution over the entire surface of the plates for even. uniform cooking
- Easy Clean System[®] for quick, efficient cleaning
- Thermostatic control from 120°F to 570°F (50°C to 300°C) for precision cooking
- Dishwasher-safe, enamel-coated cast iron Grooved Top and Bottom Plate are standard
- Grooved Plates are interchangeable with the Smooth Plates

For operation, location and safety information, please refer to the Installation

- 6' (1829 mm) cord with plug attached
- Cord location is under base at center of unit
- Stainless Steel frame
- Removable drip tray with handles



Accessories

Smooth Top Enamel Coated Cast Iron Cooking Plate □ST-S for MCG10xx models only □ ST-M for MCG14xx models only ST-LL for MCG20xx models only Left Side ST-LR for MCG20xx models only Right Side Smooth Bottom Enamel Coated Cast Iron Cooking Plate □ SB-S for MCG10xx models only □ SB-M for MCG14xx models only □ SB-L for MCG20xx models only Grooved Top Enamel-Coated Cast Iron Cooking Plate

GT-S for MCG10xx models only GT-M for MCG14xx models only GT-LL for MCG20xx models only Left Side GT-LR for MCG20xx models only Right Side

Grooved Bottom Enamel-Coated Cast Iron Cooking Plate GB-S for MCG10xx models only GB-M for MCG14xx models only □ GB-L for MCG20xx models only

Intertek



Intertek

120V. NEMA 5-15P


and Operating Manual. models are US only HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. (414) 671-6350

www.hatcocorp.com support@hatcocorp.com Find a Hatco Rep Image Library Document Library Patents Chat



Multi Contact Grills Models: MCG10G, MCG14G, MCG20G, MCG10S, MCG14S, MCG20S, MCG10GS, MCG14GS, MCG20GS

MCG Models

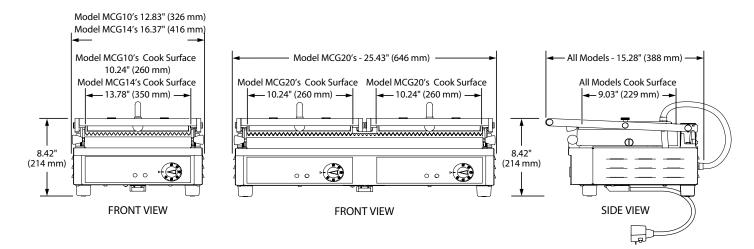

SPECIFICATIONS Top Grooved, Bottom Grooved (Plates) - Multi Contact Grills

Model	Item No.	Dimensions (Width x Depth x Height)	Max. Product Thickness	Voltage	Phase	Watts	Amps	Plug	Ship Weight*
MCG10G	MCG10G.515P	12.83" x 15.28" x 8.42" (326 x 388 x 214 mm)	2.75" (70 mm)	120	Single	1800	15.0	NEMA 5-15P*	47 lbs. (21 kg)
	MCG10G.520P							NEMA 5-20P	
MCG14G	MCG14G.515P	16.37" x 15.28" x 8.42" (416 x 388 x 214 mm)	2.75" (70 mm)	120	_ Single	1800	15.0	NEMA 5-15P*	62 lbs. (28 kg)
	MCG14G.520P							NEMA 5-20P	
	MCG14G.615P.01			2080		1950	9.4	NEMA 6-15P	
	MCG14G.615P.01			240°		2600	10.8		
MCG20G		25.43" x 15.28" x 8.42"	2.75" (70 mm)	208°	Single	2820	13.6	NEMA 6-20P	93 lbs. (42 kg)
		(646 x 388 x 214 mm)		2400		3760	15.7		

SPECIFICATIONS Top Smooth, Bottom Smooth (Plates) - Multi Contact Grills

Model	Item No.	Dimensions (Width x Depth x Height)	Max. Product Thickness	Voltage	Phase	Watts	Amps	Plug	Ship Weight*
MCG14S	MCG14S.515P	16.37" x 15.28" x 8.42" (416 x 388 x 214 mm)	2.75" (70 mm)	120	Single	1800	15.0	NEMA 5-15P*	62 lbs. (28 kg)
	MCG14S.520P							NEMA 5-20P	
	MCG14S.615P.01			2080		1950	9.4	NEMA 6-15P	
	MCG14S.615P.01			2400		2600	10.8		

* Shipping weight includes packaging.

* Not available for Canada.

• Unit is designed to operate on supply voltages between 208V and 240V.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350

www.hatcocorp.com support@hatcocorp.com Find a Hatco Rep Image Library Document Library Patents Chat

ČЪ



SPECIFICATIONS

Top Grooved, Bottom Smooth (Plates) - Multi Contact Grills

Model	Item No.	Dimensions (Width x Depth x Height)	Max. Product Thickness	Voltage	Phase	Watts	Amps	Plug	Ship Weight*
MCG20GS	MCG20GS.620P	25.43" x 15.28" x 8.42" (646 x 388 x 214 mm)	2.75" (70 mm)	2080	Single	2820	13.6	NEMA 6-20P	93 lbs. (42 kg)
				240°		3760	15.7		

* Shipping weight includes packaging.

* Not available for Canada.


• Unit is designed to operate on supply voltages between 208V and 240V.


CORD LOCATION

Under base at center of unit.


PLUG CONFIGURATIONS







NEMA 6-20P



PRODUCT SPECS Multi Contact Grills

The Multi Contact Grill shall be a Model \ldots as distributed by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Multi Contact Grill shall be rated at ... watts, ... volts, and ... inches (millimeters) in overall width. It shall have a grooved top and bottom enamel coated cast iron cooking plate, thermostatically-controlled with a temperature indicator light and power

light, patented Heating Element Pack for even heat distribution, removable drip tray with handles, Easy Clean System® and a 6' (1829 mm) cord with plug attached. Accessories shall include smooth top and bottom enamel coated cast iron cooking plate for each unit size.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. (414) 671-6350

www.hatcocorp.com | support@hatcocorp.com | Find a Hatco Rep | Image Library | Document Library | Patents | Chat

Form No. MCG Spec Sheet

ČЪ