



# Polar-Pak System by Kolpak

### General Specifications:


Interior finish: 26 gauge embossed galvalume  
 Exterior finish: 26 gauge embossed galvalume  
 Interior floors: ERA .100 smooth aluminum  
 Insulation: 4" 100% foamed-in place polyurethane  
 Thermometer: 2" Dial Thermometer  
 Screeds: 4" vinyl/foam for indoor models  
 Screeds: Metal for outdoor models

### Outdoor Package Requirements

Outdoor applications are determined by the location and regulatory requirements for that area. **Outdoor Polar Pak systems will not be available for areas where winds exceed 110 mph and/or where snow loads are above 20psf**

**NOTE:** Outdoor Polar-Pak requires outdoor package for refrigeration and roof sealing system. Outdoor units require a field supplied and field installed condensate drainline (including heat tape on freezer drains).

**15 business day lead time for Outdoor Models**

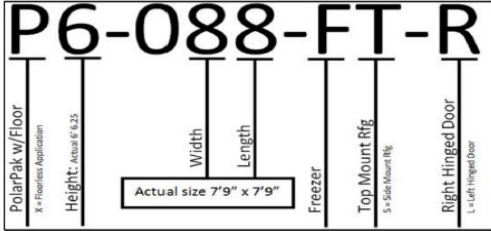

Note 1: Add "R" or "L" to end of Model Numbers above to designate Right or Left Door Hinge.  
 Note 2: "+" Refrigeration must be on 5 ft. wall

### 6' Polar-Pak Coolers & Freezers

#### Coolers: 38°F - 6' 6-1/4" High - Door 26x66

With Floor	Top Mount Model	Side Mount Model	Actual Size	Compressor	Capacity	Fans	Amps	Ship Weight
5x4x6	P6-054-CT	+P6-054-CS	4'10-1/2"x 3'11"	1/3 hp	80 cu. ft.	1.0	8.4	742
6x4x6	P6-064-CT	+P6-064-CS	5'10"x 3'11"	1/3 hp	98 cu. ft.	1.0	8.4	879
6x6x6	P6-066-CT	P6-066-CS	5'10"x 5'10"	1/2 hp	156 cu. ft.	1.0	9.9	1065
6x8x6	P6-068-CT	P6-068-CS	5'10"x 7'9"	1/2 hp	213 cu. ft.	1.0	9.9	1113
6x10x6	P6-0610-CT	P6-0610-CS	5'10"x 9'8"	3/4 hp	271 cu. ft.	2.0	16.3	1304
6x12x6	P6-0612-CT	P6-0612-CS	5'10"x 11'7"	3/4 hp	332 cu. ft.	2.0	16.3	1434
8x6x6	P6-086-CT	P6-086-CS	7'9" x 5'10"	1/2 hp	80 cu. ft.	1.0	9.9	1113
8x8x6	P6-088-CT	P6-088-CS	7'9" x 7'9"	3/4 hp	293 cu. ft.	2.0	16.3	1325
8x10x6	P6-0810-CT	P6-0810-CS	7'9" x 9'8"	3/4 hp	372 cu. ft.	2.0	16.3	1503
8x12x6	P6-0812-CT	P6-0812-CS	7'9" x 11'7"	1 hp	455 cu. ft.	2.0	16.8	1662
10x6x6	P6-106-CT	P6-106-CS	9'8" x 5'10"	3/4 hp	271 cu. ft.	2.0	16.3	1304
10x8x6	P6-108-CT	P6-108-CS	9'8" x 7'9"	3/4 hp	372 cu. ft.	2.0	16.3	1503
10x10x6	P6-1010-CT	P6-1010-CS	9'8" x 9'8"	3/4 hp	477 cu. ft.	2.0	16.3	1690
12x6x6	P6-126-CT	P6-126-CS	11'7" x 5'10"	3/4 hp	332 cu. ft.	2.0	16.3	1434
12x8x6	P6-128-CT	P6-128-CS	11'7" x 7'9"	1 hp	455 cu. ft.	2.0	16.8	1662

#### Freezers -10°F - 6' 6-1/4" High - Door 26x66

With Floor	Top Mount Model	Side Mount Model	Actual Size	Compressor	Capacity	Fans	Amps	Ship Weight
5x4x6	P6-054-FT	+P6-054-FS	4'10-1/2"x 3'11"	1 hp	80 cu. ft.	1.0	10.6	879
6x4x6	P6-064-FT	+P6-064-FS	5'10"x 3'11"	1 hp	98 cu. ft.	1.0	10.6	903
6x6x6	P6-066-FT	P6-066-FS	5'10"x 5'10"	1 hp	156 cu. ft.	1.0	10.6	1065
6x8x6	P6-068-FT	P6-068-FS	5'10"x 7'9"	1 1/2 hp	213 cu. ft.	2.0	13.5	1213
6x10x6	P6-0610-FT	P6-0610-FS	5'10"x 9'8"	1 1/2 hp	271 cu. ft.	2.0	13.5	1369
6x12x6	P6-0612-FT	P6-0612-FS	5'10"x 11'7"	1 1/2 hp	332 cu. ft.	2.0	13.5	1434
8x6x6	P6-086-FT	P6-086-FS	7'9" x 5'10"	1 1/2 hp	80 cu. ft.	2.0	13.5	1213
8x8x6	P6-088-FT	P6-088-FS	7'9" x 7'9"	1 1/2 hp	293 cu. ft.	2.0	13.5	1390
8x10x6	P6-0810-FT	P6-0810-FS	7'9" x 9'8"	2 hp	372 cu. ft.	2.0	18.8	1568
8x12x6	P6-0812-FT	P6-0812-FS	7'9" x 11'7"	2 hp	455 cu. ft.	2.0	18.8	1662
10x6x6	P6-106-FT	P6-106-FS	9'8" x 5'10"	1 1/2 hp	271 cu. ft.	2.0	13.5	1369
10x8x6	P6-108-FT	P6-108-FS	9'8" x 7'9"	2 hp	372 cu. ft.	2.0	18.8	1568
10x10x6	P6-1010-FT	P6-1010-FS	9'8" x 9'8"	2 hp	477 cu. ft.	2.0	18.8	1690
12x6x6	P6-126-FT	P6-126-FS	11'7" x 5'10"	1 1/2 hp	332 cu. ft.	2.0	13.5	1434
12x8x6	P6-128-FT	P6-128-FS	11'7" x 7'9"	2 hp	455 cu. ft.	2.0	18.8	1662

**Coolers: 38°F - 6' 6-1/4" High - Door 26x66**

<u>Floorless</u>	<u>Top Mount Model</u>	<u>Side Mount Model</u>	<u>Actual Size</u>	<u>Compressor</u>	<u>Capacity</u>	<u>Fans</u>	<u>Amps</u>	<u>Ship Weight</u>
5x4x6	PX6-054-CT	+PX6-054-CS	4'10-1/2"x 3'11"	1/3 hp	80 cu. ft.	1.0	8.4	662
6x4x6	PX6-064-CT	+PX6-064-CS	5'10"x 3'11"	1/3 hp	98 cu. ft.	1.0	8.4	707
6x6x6	PX6-066-CT	PX6-066-CS	5'10"x 5'10"	1/2 hp	156 cu. ft.	1.0	9.9	821
6x8x6	PX6-068-CT	PX6-068-CS	5'10"x 7'9"	1/2 hp	213 cu. ft.	1.0	9.9	921
6x10x6	PX6-610-CT	PX6-0610-CS	5'10"x 9'8"	3/4 hp	271 cu. ft.	2.0	16.3	1064
6x12x6	PX6-612-CT	PX6-0612-CS	5'10"x 11'7"	3/4 hp	332 cu. ft.	2.0	16.3	1146
8x6x6	PX6-086-CT	PX6-086-CS	7'9" x 5'10"	1/2 hp	80 cu. ft.	1.0	9.9	977
8x8x6	PX6-088-CT	PX6-088-CS	7'9" x 7'9"	3/4 hp	293 cu. ft.	2.0	16.3	1069
8x10x6	PX6-810-CT	PX6-0810-CS	7'9" x 9'8"	3/4 hp	372 cu. ft.	2.0	16.3	1183
8x12x6	PX6-812-CT	PX6-0812-CS	7'9" x 11'7"	1 hp	455 cu. ft.	2.0	16.8	1253
10x6x6	PX6-106-CT	PX6-106-CS	9'8" x 5'10"	3/4 hp	271 cu. ft.	2.0	16.3	1064
10x8x6	PX6-108-CT	PX6-108-CS	9'8" x 7'9"	3/4 hp	372 cu. ft.	2.0	16.3	1183
10x10x6	PX6-1010-CT	PX6-1010-CS	9'8" x 9'8"	3/4 hp	477 cu. ft.	2.0	16.3	1442
12x6x6	PX6-126-CT	PX6-126-CS	11'7" x 5'10"	3/4 hp	332 cu. ft.	2.0	16.3	1236
12x8x6	PX6-128-CT	PX6-128-CS	11'7" x 7'9"	1 hp	455 cu. ft.	2.0	16.8	1346

**7' Polar-Pak Coolers & Freezers****Coolers: 38°F - 7' 6-1/4" High - Door 26x78**

<u>With Floor</u>	<u>Top Mount Model</u>	<u>Side Mount Model</u>	<u>Actual Size</u>	<u>Compressor</u>	<u>Capacity</u>	<u>Fans</u>	<u>Amps</u>	<u>Ship Weight</u>
5x4x7	P7-054-CT	+P7-054-CS	4'10-1/2"x 3'11"	1/3 hp	84 cu. ft.	1.0	8.4	1013
6x4x7	P7-064-CT	+P7-064-CS	5'10"x 3'11"	1/3 hp	116 cu. ft.	1.0	8.4	1013
6x6x7	P7-066-CT	P7-066-CS	5'10"x 5'10"	1/2 hp	184 cu. ft.	1.0	9.9	1013
6x8x7	P7-068-CT	P7-068-CS	5'10"x 7'9"	1/2 hp	252 cu. ft.	1.0	9.9	1169
6x10x7	P7-0610-CT	P7-0610-CS	5'10"x 9'8"	3/4 hp	320 cu. ft.	2.0	16.3	1368
6x12x7	P7-0612-CT	P7-0612-CS	5'10"x 11'7"	3/4 hp	388 cu. ft.	2.0	16.3	1524
8x6x7	P7-086-CT	P7-086-CS	7'9" x 5'10"	1/2 hp	252 cu. ft.	1.0	9.9	1169
8x8x7	P7-088-CT	P7-088-CS	7'9" x 7'9"	3/4 hp	345 cu. ft.	2.0	16.3	1391
8x10x7	P7-0810-CT	P7-0810-CS	7'9" x 9'8"	3/4 hp	439 cu. ft.	2.0	16.3	1573
8x12x7	P7-0812-CT	P7-0812-CS	7'9" x 11'7"	1 hp	532 cu. ft.	2.0	16.8	1762
10x6x7	P7-106-CT	P7-106-CS	9'8" x 5'10"	3/4 hp	320 cu. ft.	2.0	16.3	1368
10x8x7	P7-108-CT	P7-108-CS	9'8" x 7'9"	3/4 hp	439 cu. ft.	2.0	16.3	1573
10x10x7	P7-1010-CT	P7-1010-CS	9'8" x 9'8"	1 hp	558 cu.ft.	2.0	16.8	1790
12x6x7	P7-126-CT	P7-126-CS	11'7" x 5'10"	3/4 hp	388 cu. ft.	2.0	16.3	1524
12x8x7	P7-128-CT	P7-128-CS	11'7" x 7'9"	1 hp	532 cu. ft.	2.0	16.8	1762

**Freezer: -10°F - 7' 6-1/4" High - Door 26x78**

<u>With Floor</u>	<u>Top Mount Model</u>	<u>Side Mount Model</u>	<u>Actual Size</u>	<u>Compressor</u>	<u>Capacity</u>	<u>Fans</u>	<u>Amps</u>	<u>Ship Weight</u>
5x4x7	P7-054-FT	+P7-054-FS	4'10-1/2"x 3'11"	1 hp	84 cu. ft.	1.0	10.6	1013
6x4x7	P7-064-FT	+P7-064-FS	5'10"x 3'11"	1 hp	116 cu. ft.	1.0	10.6	1013
6x6x7	P7-066-FT	P7-066-FS	5'10"x 5'10"	1 hp	184 cu. ft.	1.0	10.6	1113
6x8x7	P7-068-FT	P7-068-FS	5'10"x 7'9"	1 1/2 hp	252 cu. ft.	2.0	13.5	1269
6x10x7	P7-0610-FT	P7-0610-FS	5'10"x 9'8"	1 1/2 hp	320 cu. ft.	2.0	13.5	1433
6x12x7	P7-0612-FT	P7-0612-FS	5'10"x 11'7"	1 1/2 hp	388 cu. ft.	2.0	13.5	1524
8x6x7	P7-086-FT	P7-086-FS	7'9" x 5'10"	1 1/2 hp	252 cu. ft.	2.0	13.5	1269
8x8x7	P7-088-FT	P7-088-FS	7'9" x 7'9"	1 1/2 hp	345 cu. ft.	2.0	13.5	1456
8x10x7	P7-0810-FT	P7-0810-FS	7'9" x 9'8"	2 hp	439 cu. ft.	2.0	18.8	1573
8x12x7	P7-0812-FT	P7-0812-FS	7'9" x 11'7"	2 hp	532 cu. ft.	2.0	18.8	1762
10x6x7	P7-106-FT	P7-106-FS	9'8" x 5'10"	1 1/2 hp	320 cu. ft.	2.0	13.5	1433
10x8x7	P7-108-FT	P7-108-FS	9'8" x 7'9"	2 hp	439 cu. ft.	2.0	18.8	1638
10x10x7	P7-1010-FT	P7-1010-FS	9'8" x 9'8"	2 hp	558 cu.ft.	2.0	18.8	1790
12x6x7	P7-126-FT	P7-126-FS	11'7" x 5'10"	1 1/2 hp	388 cu. ft.	2.0	13.5	1524
12x8x7	P7-128-FT	P7-128-FS	11'7" x 7'9"	2 hp	532 cu. ft.	2.0	18.8	1762

**Coolers: 38°F - 7' 6-1/4" High - Door 26x78**


<u>Floorless</u>	<u>Top Mount Model</u>	<u>Side Mount Model</u>	<u>Actual Size</u>	<u>Compressor</u>	<u>Capacity</u>	<u>Fans</u>	<u>Amps</u>	<u>Ship Weight</u>
5x4x7	PX7-054-CT	+PX7-054-CS	4'10-1/2"x 3'11"	1/3 hp	84 cu. ft.	1.0	8.4	869
6x4x7	PX7-064-CT	+PX7-064-CS	5'10"x 3'11"	1/2 hp	116 cu. ft.	1.0	9.9	869
6x6x7	PX7-066-CT	PX7-066-CS	5'10"x 5'10"	1/2 hp	184 cu. ft.	1.0	9.9	869
6x8x7	PX7-068-CT	PX7-068-CS	5'10"x 7'9"	3/4 hp	252 cu. ft.	2.0	16.3	977
6x10x7	PX7-0610-CT	PX7-0610-CS	5'10"x 9'8"	3/4 hp	320 cu. ft.	2.0	16.3	1128
6x12x7	PX7-0612-CT	PX7-0612-CS	5'10"x 11'7"	3/4 hp	388 cu. ft.	2.0	16.3	1236
8x6x7	PX7-086-CT	PX7-086-CS	7'9" x 5'10"	3/4 hp	252 cu. ft.	2.0	16.3	977
8x8x7	PX7-088-CT	PX7-088-CS	7'9" x 7'9"	3/4 hp	345 cu. ft.	2.0	16.3	1135
8x10x7	PX7-0810-CT	PX7-0810-CS	7'9" x 9'8"	1 hp	439 cu. ft.	2.0	16.8	1253
8x12x7	PX7-0812-CT	PX7-0812-CS	7'9" x 11'7"	1 hp	532 cu. ft.	2.0	16.8	1346
10x6x7	PX7-106-CT	PX7-106-CS	9'8" x 5'10"	3/4 hp	320 cu. ft.	2.0	16.3	1128
10x8x7	PX7-108-CT	PX7-108-CS	9'8" x 7'9"	1 hp	439 cu. ft.	2.0	16.8	1253
10x10x7	PX7-1010-CT	PX7-1010-CS	9'8" x 9'8"	1 hp	558 cu.ft.	2.0	16.8	1442
12x6x7	PX7-126-CT	PX7-126-CS	11'7" x 5'10"	3/4 hp	388 cu. ft.	2.0	16.3	1236
12x8x7	PX7-128-CT	PX7-128-CS	11'7" x 7'9"	1 hp	532 cu. ft.	2.0	16.8	1346

# Polar-Pak System

by Kolpak

## Quick-Ship Program Units

The following Polar-Pak units are available under the "Quick-Ship" program.  
 QS Models Ship in 48-Hours.

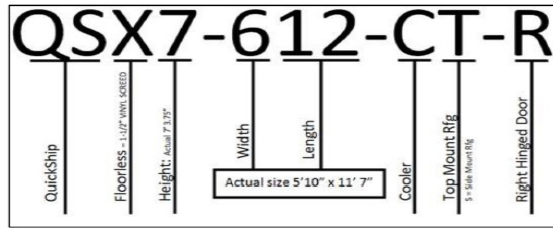

### General Specifications:

Interior finish: 26 gauge embossed galvalume  
 Exterior finish: 26 gauge embossed galvalume  
 Interior floors: ERA .100 smooth aluminum  
 Insulation: 4" 100% foamed-in place polyurethane  
 Thermometer: 2" Dial Thermometer

- ! 1: Add "R" or "L" to end of Model Numbers above to designate Right or Left Door Hinge.
- ! 2: "+" Refrigeration must be on 5 ft. wall
- ! 3: Mount refrigeration only for quick ship program. Actual height for units without floors is 6' 3 3/4". Actual height for units with floors is 6' 6 1/4". 26 x 66 door, : or left hinged, no options. 26 gauge Stucco Embossed Galvalume Steel, interior and exterior. Outdoor units not available as Quick Ship.

### 6' Quick-Ship Polar-Paks Coolers & Freezers

#### Coolers: 38°F - 6'-6-1/4" High

With Floor	Model	Actual Size	Capacity	Model	Fans	Compressor	Amps	Electrical	Ship Weight
5x4x6	QS6-054-CT	4'10-1/2"x 3'11"	80 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	742
6x4x6	QS6-064-CT	5'10"x 3'11"	98 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	879
6x6x6	QS6-066-CT	5'10"x 5'10"	156 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	1065
6x8x6	QS6-068-CT	5'10"x 7'9"	213 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	1113
6x10x6	QS6-0610-CT	5'10"x 9'8"	271 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1304
6x12x6	QS6-0612-CT	5'10"x 11'7"	332 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1434
8x6x6	QS6-086-CT	7'9" x 5'10"	80 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	1113
8x8x6	QS6-088-CT	7'9" x 7'9"	293 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1325
8x10x6	QS6-0810-CT	7'9" x 9'8"	372 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1503
8x12x6	QS6-0812-CT	7'9" x 11'7"	455 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1662
10x6x6	QS6-106-CT	9'8" x 5'10"	271 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1304
10x8x6	QS6-108-CT	9'8" x 7'9"	372 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1503
10x10x6	QS6-1010-CT	9'8" x 9'8"	477 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1690
12x6x6	QS6-126-CT	11'7" x 5'10"	332 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1434
12x8x6	QS6-128-CT	11'7" x 7'9"	455 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1662

#### Freezers -10°F - 6'-6-1/4" High

With Floor	Model	Actual Size	Capacity	Model	Fans	Compressor	Amps	Electrical	Ship Weight
5x4x6	QS6-054-FT	4'10-1/2"x 3'11"	80 cu. ft.	PF094T3	1	1 hp	10.6	208-230/60/1	879
6x4x6	QS6-064-FT	5'10"x 3'11"	98 cu. ft.	PF094T3	1	1 hp	10.6	208-230/60/1	903
6x6x6	QS6-066-FT	5'10"x 5'10"	156 cu. ft.	PF094T3	1	1 hp	10.6	208-230/60/1	1065
6x8x6	QS6-068-FT	5'10"x 7'9"	213 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1213
6x10x6	QS6-0610-FT	5'10"x 9'8"	271 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1369
6x12x6	QS6-0612-FT	5'10"x 11'7"	332 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1434
8x6x6	QS6-086-FT	7'9" x 5'10"	80 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1213
8x8x6	QS6-088-FT	7'9" x 7'9"	293 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1390
8x10x6	QS6-0810-FT	7'9" x 9'8"	372 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1568
8x12x6	QS6-0812-FT	7'9" x 11'7"	455 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1662
10x6x6	QS6-106-FT	9'8" x 5'10"	271 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1369
10x8x6	QS6-108-FT	9'8" x 7'9"	372 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1568
10x10x6	QS6-1010-FT	9'8" x 9'8"	477 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1690
12x6x6	QS6-126-FT	11'7" x 5'10"	332 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1434
12x8x6	QS6-128-FT	11'7" x 7'9"	455 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1662

#### Coolers: 38°F - 6'-3-3/4" High

Floorless	Model	Actual Size	Capacity	Model	Fans	Compressor	Amps	Electrical	Ship Weight
5x4x6	QSX6-054-CT	4'10-1/2"x 3'11"	80 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	662
6x4x6	QSX6-064-CT	5'10"x 3'11"	98 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	707
6x6x6	QSX6-066-CT	5'10"x 5'10"	156 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	821
6x8x6	QSX6-068-CT	5'10"x 7'9"	213 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	921
6x10x6	QSX6-0610-CT	5'10"x 9'8"	271 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1064
6x12x6	QSX6-0612-CT	5'10"x 11'7"	332 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1146
8x6x6	QSX6-086-CT	7'9" x 5'10"	80 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	977
8x8x6	QSX6-088-CT	7'9" x 7'9"	293 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1069
8x10x6	QSX6-0810-CT	7'9" x 9'8"	372 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1183
8x12x6	QSX6-0812-CT	7'9" x 11'7"	455 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1253
10x6x6	QSX6-106-CT	9'8" x 5'10"	271 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1064
10x8x6	QSX6-108-CT	9'8" x 7'9"	372 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1183
10x10x6	QSX6-1010-CT	9'8" x 9'8"	477 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1442
12x6x6	QSX6-126-CT	11'7" x 5'10"	332 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1236
12x8x6	QSX6-128-CT	11'7" x 7'9"	455 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1346

7' Quick-Ship Polar-Paks Coolers & Freezers

**Coolers: 38°F - 7'-6-1/4" High**

<u>With Floor</u>	<u>Model</u>	<u>Actual Size</u>	<u>Capacity</u>	<u>Model</u>	<u>Fans</u>	<u>Compressor</u>	<u>Amps</u>	<u>Electrical</u>	<u>Ship Weight</u>
5x4x7	QS7-054-CT	4'10-1/2"x 3'11"	84 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	1013
6x4x7	QS7-064-CT	5'10"x 3'11"	116 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	1013
6x6x7	QS7-066-CT	5'10"x 5'10"	184 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	1013
6x8x7	QS7-068-CT	5'10"x 7'9"	252 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	1169
6x10x7	QS7-0610-CT	5'10"x 9'8"	320 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1368
6x12x7	QS7-0612-CT	5'10"x 11'7"	388 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1524
8x6x7	QS7-086-CT	7'9" x 5'10"	252 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	1169
8x8x7	QS7-088-CT	7'9" x 7'9"	345 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1391
8x10x7	QS7-0810-CT	7'9" x 9'8"	439 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1573
8x12x7	QS7-0812-CT	7'9" x 11'7"	532 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1762
10x6x7	QS7-106-CT	9'8" x 5'10"	320 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1368
10x8x7	QS7-108-CT	9'8" x 7'9"	439 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1573
10x10x7	QS7-1010-CT	9'8" x 9'8"	558 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1790
12x6x7	QS7-126-CT	11'7" x 5'10"	388 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1524
12x8x7	QS7-128-CT	11'7" x 7'9"	532 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1762

**Freezers -10°F - 7'-6-1/4" High**

<u>With Floor</u>	<u>Model</u>	<u>Actual Size</u>	<u>Capacity</u>	<u>Model</u>	<u>Fans</u>	<u>Compressor</u>	<u>Amps</u>	<u>Electrical</u>	<u>Ship Weight</u>
5x4x7	QS7-054-FT	4'10-1/2"x 3'11"	84 cu. ft.	PF094T3	1	1 hp	10.6	208-230/60/1	1013
6x4x7	QS7-064-FT	5'10"x 3'11"	116 cu. ft.	PF094T3	1	1 hp	10.6	208-230/60/1	1013
6x6x7	QS7-066-FT	5'10"x 5'10"	184 cu. ft.	PF094T3	1	1 hp	10.6	208-230/60/1	1113
6x8x7	QS7-068-FT	5'10"x 7'9"	252 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1269
6x10x7	QS7-0610-FT	5'10"x 9'8"	320 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1433
6x12x7	QS7-0612-FT	5'10"x 11'7"	388 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1524
8x6x7	QS7-086-FT	7'9" x 5'10"	252 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1269
8x8x7	QS7-088-FT	7'9" x 7'9"	345 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1456
8x10x7	QS7-0810-FT	7'9" x 9'8"	439 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1573
8x12x7	QS7-0812-FT	7'9" x 11'7"	532 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1762
10x6x7	QS7-106-FT	9'8" x 5'10"	320 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1433
10x8x7	QS7-108-FT	9'8" x 7'9"	439 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1638
10x10x7	QS7-1010-FT	9'8" x 9'8"	558 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1790
12x6x7	QS7-126-FT	11'7" x 5'10"	388 cu. ft.	PF144T3	2	1 1/2 hp	13.5	208-230/60/1	1524
12x8x7	QS7-128-FT	11'7" x 7'9"	532 cu. ft.	PF194T3	2	2 hp	18.8	208-230/60/1	1762

**Coolers: 38°F - 7'-3-3/4" High**

<u>Floorless</u>	<u>Model</u>	<u>Actual Size</u>	<u>Capacity</u>	<u>Model</u>	<u>Fans</u>	<u>Compressor</u>	<u>Amps</u>	<u>Electrical</u>	<u>Ship Weight</u>
5x4x7	QSX7-054-CT	4'10-1/2"x 3'11"	84 cu. ft.	PC039T2	1	1/3 hp	8.4	115/60/1	869
6x4x7	QSX7-064-CT	5'10"x 3'11"	116 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	869
6x6x7	QSX7-066-CT	5'10"x 5'10"	184 cu. ft.	PC049T2	1	1/2 hp	9.9	115/60/1	869
6x8x7	QSX7-068-CT	5'10"x 7'9"	252 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	977
6x10x7	QSX7-0610-CT	5'10"x 9'8"	320 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1128
6x12x7	QSX7-0612-CT	5'10"x 11'7"	388 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1236
8x6x7	QSX7-086-CT	7'9" x 5'10"	252 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	977
8x8x7	QSX7-088-CT	7'9" x 7'9"	345 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1135
8x10x7	QSX7-0810-CT	7'9" x 9'8"	439 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1253
8x12x7	QSX7-0812-CT	7'9" x 11'7"	532 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1346
10x6x7	QSX7-106-CT	9'8" x 5'10"	320 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1128
10x8x7	QSX7-108-CT	9'8" x 7'9"	439 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1253
10x10x7	QSX7-1010-CT	9'8" x 9'8"	558 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1442
12x6x7	QSX7-126-CT	11'7" x 5'10"	388 cu. ft.	PC069T2	2	3/4 hp	16.3	115/60/1	1236
12x8x7	QSX7-128-CT	11'7" x 7'9"	532 cu. ft.	PC099T2	2	1 hp	16.8	115/60/1	1346