


ICE QUEEN 2700 THREE PHASE 208-230 V / 60 Hz

MODULAR GRANULAR ICE MACHINE

**3 YEARS
WARRANTY
PARTS & LABOR**

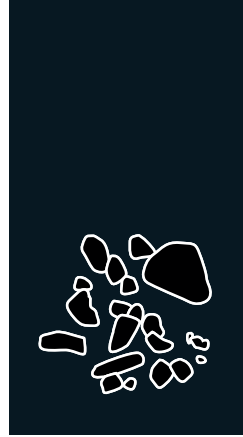

FEATURES

- ▶ PRODUCES WET GRANULAR ICE
- ▶ THE MOST EFFICIENT EVAPORATOR OF THE MARKET, LOWER ENERGY CONSUMPTION AND HIGHER ICE PRODUCTION
- ▶ EVAPORATOR WITHOUT GASKETS OR SEALS
- ▶ STAINLESS STEEL AUGER WITH RESILIENT COATING TO MAXIMIZE LIFESPAN
- ▶ POWERFUL SPEED REDUCER ON TOP
- ▶ AISI 304 STAINLESS STEEL BODY
- ▶ ELECTROMECHANICAL CONTROL SYSTEM
- ▶ ICE DROPS OUT THROUGH THE OPENING ON THE BOTTOM OF THE UNIT
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS)



! THE INSTALLATION OF AN ANTI-SCALE FILTER AND PERIODIC CLEANING ARE ADVISED IN AREAS WITH MEDIUM OR HIGH LIMESCALE CONTENT (HARD WATER)

- EASI**
Easy Access for Service & Installation
- STIF**
Strong Innox Frame
- FRONT VENTILATION**

	lbs 24 H	70°F/21°C 50°F/10°C	90°F/32°C 70°F/21°C	in (mm)	in (mm)	 WET GRANULAR ICE 25% RESIDUAL WATER CONTENT
	lbs (Kg)	lbs (Kg)	in (mm)	in (mm)		
IQ 2700 A	2860 (1297)	2060 (934)	Width 52" (1,335) Depth 24" (610) Height 32" (815)	Width 55" (1,400) Depth 27" (685) Height 35" (890)		
IQ 2700 W	2900 (1315)	2100 (953)				

ACCESSORIES

NOT INCLUDED (OPTIONAL)



10" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS-101 K



10" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS10



SCALE KLEEN

RECOMMENDED BINS



S1050 + IQ 2700



SCD900 + IQ 2700



SCD1400 + IQ 2700




SCD1800 + IQ 2700


TECHNICAL SCHEME

ICE QUEEN 2700


RIGHT SIDE VIEW
VISTA LATERAL DERECHA




FRONTAL VIEW
VISTA FRONTAL

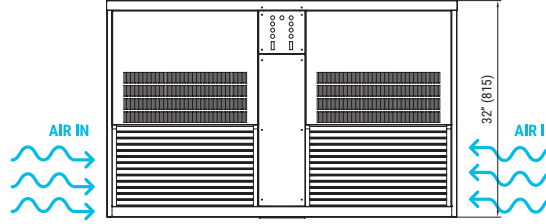

REAR VIEW
VISTA TRASERA

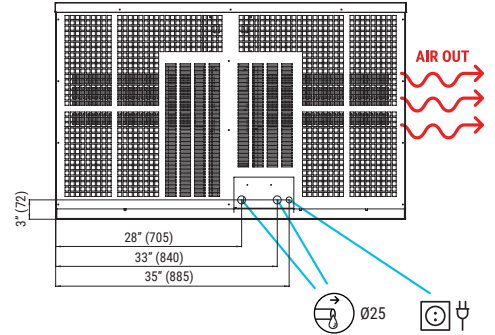

CENTRAL CROSS SECTION VIEW OF THE BASE
VISTA DE LA BASE DESDE SECCIÓN CENTRAL

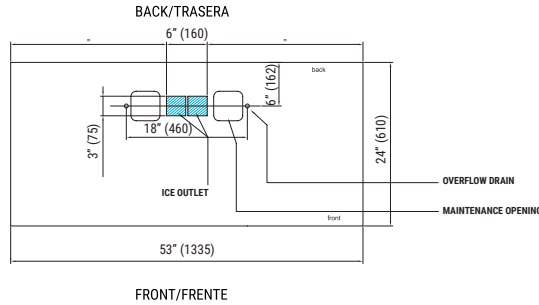

OPERATING CONDITIONS

* All dimensions in inches (and mm)


PRODUCTION (LBS) 60Hz

±10% V

41°F/109°F

41°F/95°F

14.5 psi (1 bar) / 87 psi (6 bar)



V	Hz	ph
208-230	60	3N

24 H **lbs** **IQ 2700 AIR COOLED**

	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	3050	2880	2580	2290
68° 21°	2860	2680	2380	2100
90° 32°	2440	2250	2060	1830
109° 43°	2000	1830	1672	1400

24 H **lbs** **IQ 2700 WATER COOLED**

	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	3093	2920	2630	2334
68° 21°	2900	2717	2426	2141
90° 32°	2474	2281	2100	1866
109° 43°	2028	1856	1704	1427

MODELS

IQ 2700 A

IQ 2700 W

	Temp. Ev. (°F)	ASHRAE CONDITIONS (BTu/h) (W)	(W) 109°F	(AWG/mm ²) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTu/h) (W)	(lbs)	(lbs)
IQ 2700 A	5°	17,938 5,257	3,400	14/1.5 5	16	4.2	12 54.1	13,584 3,981	463	573
IQ 2700 W	5°	17,938 5,257	3,400	14/1.5 5	16	4.2	48 219	13,584 3,981	463	573



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



**2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR**
Read our warranty policy to know more about limitations and exclusions

