

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

SCHOOL MILK FORCED AIR COOLER

STF58HC Dual Access Cooler Hydrocarbon Series

MODELS: STF58HC-S STF58HC-W





OPTIONS & ACCESSORIES

- Corner bumpers
- Graphics

3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- SS units: Stainless steel exterior and interior
- White units: White coated steel exterior. Interior features a one piece, stainless steel back, front, floor with galvanized side walls for maximum milk crate support
- Lids, doors, hinges and door latches made from stainless steel are standard on all units
- Full electronic Control
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning and connecting to drain hose with hose adapter
- Flexible compression door gaskets ensure tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder lock
- 5" Heavy-duty plate casters (2 with locks)
- Balanced, forced -air refrigeration system provides rapid chilling of product
- Maintains continuous milk temperature between 36° 38°F

REFRIGERATION SYSTEM

 Refrigeration system uses R290 refrigerant to comply with all environmental concerns


















MODEL	STF58HC (white & stainless steel models)	
EXTERNAL DIMENSIONAL DATA		
Width Overall	58"	
Depth Overall	34"	
Height Overall with Casters	47 ³ ⁄ ₄ "	
Number of Lids/Doors	Dual Access	
Both Lids Extended	64"	
INTERNAL DIMENSIONAL DAT	'A	
NET Capacity (cubic ft.)	24.3	
Internal Width Overall (in)	46"	
Internal Depth Overall (in)	30"	
Internal Height Usable (in)	24 %"	
ASE CAPACITY		
13" X 13" 11"	16	
19" X 13" 11"	10	
ELECTRICAL DATA		
Full Load Amperes	3.3	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	2052	
SHIPPING DATA		
Gross Weight - Crated lbs	460 lbs	
Height - Crated	53 ½"	
Width - Crated	38"	
Depth - Crated	53"	

School Milk Cooler Model: STF58HC

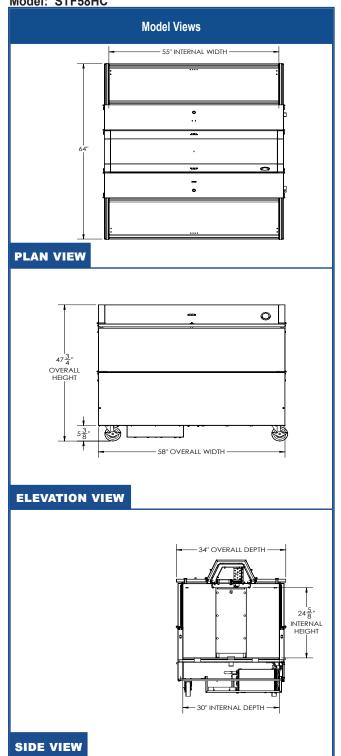





115/60/1 NEMA 5-15P

Units pre-wired at factory and include 8' long cord and plug set.

