



Model: _____ Item #: _____ Date: _____
 Project: _____ Qty: _____ Approved By: _____

Royal Series One Compartment Bar Sink

Royal Series Underbar



KR19-31C


OPTIONAL ACCESSORIES

KR-402	Faucet Install Kit
21-443L	3/8" E-Z Install Wall Mount Faucet Water Line Kit
KR-310	Right End Splash
KR-311	Left End Splash
KR-401	Cap Catcher and Opener
KR-501	Towel Ring
30-160	Perforated Dump Basket
KR-806	Upgrade: 6" Longer Stainless Steel Legs
RS-"XX"	Sound Deadened Single Speedrail ("XX" indicates size)
RD-"XX"	Sound Deadened Double Speedrail ("XX" indicates size)

STANDARD FEATURES

Sink Bowl	20 gauge stainless steel. 10" x 14" x 10" deep sink bowl. Furnished with 1-1/2" IPS rear corner drain and 7-1/2" overflow pipe NOTE: KR19-1C and KR24-1C have 7" deep bowl
Drainboard	20 gauge stainless steel reinforced with welded braces every 6"
Front Apron	20 gauge stainless steel clad over 20 gauge galvanized steel
Sides	20 gauge stainless steel
Backsplash	20 gauge stainless steel
Back and Bottom	20 gauge galvanized steel
Legs	1-5/8" tubular 16 gauge stainless steel with grey plastic bullet foot
Plumbing	Hot/Cold Water: 1/2" IPS Drain: 1-1/2" IPS
Faucet	4" OC wall or deck mount faucet and ceramic cartridge valves

KR24-1C





Model Numbers	Overall Length	Drainboard	Left Side to Drain	Bowl Location	Weight (lbs.)
KR19-1C*	1'-0"	N/A	6"	Center	42
KR19-31C	3'-0"	12" Each	16"	Center	60
KR24-1C*	1'-0"	N/A	6"	Center	42

* 7" deep bowl with 1-1/2" drain in center.

MECHANICAL REQUIREMENTS: 1/2" IPS Hot and Cold water. 1-1/2" IPS drain connection.

KR19-1C

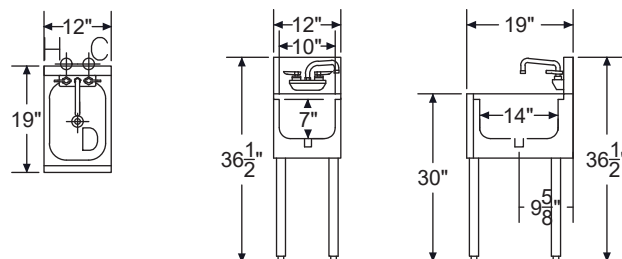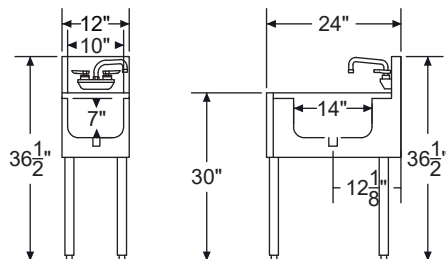

Conforms to NSF Std. 2