



Polar-Pak System by Kolpak

General Specifications:


- Interior finish: 26 gauge embossed galvalume
- Exterior finish: 26 gauge embossed galvalume
- Interior floors: ERA .100 smooth aluminum
- Insulation: 4" 100% foamed-in place polyurethane
- Thermometer: 2" Dial Thermometer
- Screeds: 4" vinyl/foam for indoor models
- Screeds: Metal for outdoor models

Outdoor Package Requirements

Outdoor applications are determined by the location and regulatory requirements for that area. **Outdoor Polar Pak systems will not be available for areas where winds exceed 110 mph and/or where snow loads are above 20psf**

NOTE: Outdoor Polar-Pak requires outdoor package for refrigeration and roof sealing system. Outdoor units require a field supplied and field installed condensate drainline (including heat tape on freezer drains).

15 business day lead time for Outdoor Models

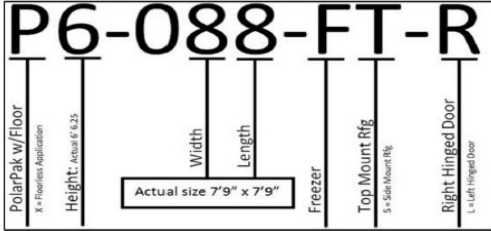

Note 1: Add "R" or "L" to end of Model Numbers above to designate Right or Left Door Hinge.
Note 2: "+" Refrigeration must be on 5 ft. wall

6' Polar-Pak Coolers & Freezers

Coolers: 38°F - 6' 6-1/4" High - Door 26x66

| With Floor | Top Mount Model | Side Mount Model | Actual Size | Compressor | Capacity | Fans | Amps | Ship Weight |
|------------|-----------------|------------------|------------------|------------|-------------|------|------|-------------|
| 5x4x6 | P6-054-CT | +P6-054-CS | 4'10-1/2"x 3'11" | 1/3 hp | 80 cu. ft. | 1.0 | 8.4 | 742 |
| 6x4x6 | P6-064-CT | +P6-064-CS | 5'10"x 3'11" | 1/3 hp | 98 cu. ft. | 1.0 | 8.4 | 879 |
| 6x6x6 | P6-066-CT | P6-066-CS | 5'10"x 5'10" | 1/2 hp | 156 cu. ft. | 1.0 | 9.9 | 1065 |
| 6x8x6 | P6-068-CT | P6-068-CS | 5'10"x 7'9" | 1/2 hp | 213 cu. ft. | 1.0 | 9.9 | 1113 |
| 6x10x6 | P6-0610-CT | P6-0610-CS | 5'10"x 9'8" | 3/4 hp | 271 cu. ft. | 2.0 | 16.3 | 1304 |
| 6x12x6 | P6-0612-CT | P6-0612-CS | 5'10"x 11'7" | 3/4 hp | 332 cu. ft. | 2.0 | 16.3 | 1434 |
| 8x6x6 | P6-086-CT | P6-086-CS | 7'9" x 5'10" | 1/2 hp | 80 cu. ft. | 1.0 | 9.9 | 1113 |
| 8x8x6 | P6-088-CT | P6-088-CS | 7'9" x 7'9" | 3/4 hp | 293 cu. ft. | 2.0 | 16.3 | 1325 |
| 8x10x6 | P6-0810-CT | P6-0810-CS | 7'9" x 9'8" | 3/4 hp | 372 cu. ft. | 2.0 | 16.3 | 1503 |
| 8x12x6 | P6-0812-CT | P6-0812-CS | 7'9" x 11'7" | 1 hp | 455 cu. ft. | 2.0 | 16.8 | 1662 |
| 10x6x6 | P6-106-CT | P6-106-CS | 9'8" x 5'10" | 3/4 hp | 271 cu. ft. | 2.0 | 16.3 | 1304 |
| 10x8x6 | P6-108-CT | P6-108-CS | 9'8" x 7'9" | 3/4 hp | 372 cu. ft. | 2.0 | 16.3 | 1503 |
| 10x10x6 | P6-1010-CT | P6-1010-CS | 9'8" x 9'8" | 3/4 hp | 477 cu. ft. | 2.0 | 16.3 | 1690 |
| 12x6x6 | P6-126-CT | P6-126-CS | 11'7" x 5'10" | 3/4 hp | 332 cu. ft. | 2.0 | 16.3 | 1434 |
| 12x8x6 | P6-128-CT | P6-128-CS | 11'7" x 7'9" | 1 hp | 455 cu. ft. | 2.0 | 16.8 | 1662 |

Freezers -10°F - 6' 6-1/4" High - Door 26x66

| With Floor | Top Mount Model | Side Mount Model | Actual Size | Compressor | Capacity | Fans | Amps | Ship Weight |
|------------|-----------------|------------------|------------------|------------|-------------|------|------|-------------|
| 5x4x6 | P6-054-FT | +P6-054-FS | 4'10-1/2"x 3'11" | 1 hp | 80 cu. ft. | 1.0 | 10.6 | 879 |
| 6x4x6 | P6-064-FT | +P6-064-FS | 5'10"x 3'11" | 1 hp | 98 cu. ft. | 1.0 | 10.6 | 903 |
| 6x6x6 | P6-066-FT | P6-066-FS | 5'10"x 5'10" | 1 hp | 156 cu. ft. | 1.0 | 10.6 | 1065 |
| 6x8x6 | P6-068-FT | P6-068-FS | 5'10"x 7'9" | 1 1/2 hp | 213 cu. ft. | 2.0 | 13.5 | 1213 |
| 6x10x6 | P6-0610-FT | P6-0610-FS | 5'10"x 9'8" | 1 1/2 hp | 271 cu. ft. | 2.0 | 13.5 | 1369 |
| 6x12x6 | P6-0612-FT | P6-0612-FS | 5'10"x 11'7" | 1 1/2 hp | 332 cu. ft. | 2.0 | 13.5 | 1434 |
| 8x6x6 | P6-086-FT | P6-086-FS | 7'9" x 5'10" | 1 1/2 hp | 80 cu. ft. | 2.0 | 13.5 | 1213 |
| 8x8x6 | P6-088-FT | P6-088-FS | 7'9" x 7'9" | 1 1/2 hp | 293 cu. ft. | 2.0 | 13.5 | 1390 |
| 8x10x6 | P6-0810-FT | P6-0810-FS | 7'9" x 9'8" | 2 hp | 372 cu. ft. | 2.0 | 18.8 | 1568 |
| 8x12x6 | P6-0812-FT | P6-0812-FS | 7'9" x 11'7" | 2 hp | 455 cu. ft. | 2.0 | 18.8 | 1662 |
| 10x6x6 | P6-106-FT | P6-106-FS | 9'8" x 5'10" | 1 1/2 hp | 271 cu. ft. | 2.0 | 13.5 | 1369 |
| 10x8x6 | P6-108-FT | P6-108-FS | 9'8" x 7'9" | 2 hp | 372 cu. ft. | 2.0 | 18.8 | 1568 |
| 10x10x6 | P6-1010-FT | P6-1010-FS | 9'8" x 9'8" | 2 hp | 477 cu. ft. | 2.0 | 18.8 | 1690 |
| 12x6x6 | P6-126-FT | P6-126-FS | 11'7" x 5'10" | 1 1/2 hp | 332 cu. ft. | 2.0 | 13.5 | 1434 |
| 12x8x6 | P6-128-FT | P6-128-FS | 11'7" x 7'9" | 2 hp | 455 cu. ft. | 2.0 | 18.8 | 1662 |

Coolers: 38°F - 6' 6-1/4" High - Door 26x66

| <u>Floorless</u> | <u>Top Mount Model</u> | <u>Side Mount Model</u> | <u>Actual Size</u> | <u>Compressor</u> | <u>Capacity</u> | <u>Fans</u> | <u>Amps</u> | <u>Ship Weight</u> |
|------------------|------------------------|-------------------------|--------------------|-------------------|-----------------|-------------|-------------|--------------------|
| 5x4x6 | PX6-054-CT | +PX6-054-CS | 4'10-1/2"x 3'11" | 1/3 hp | 80 cu. ft. | 1.0 | 8.4 | 662 |
| 6x4x6 | PX6-064-CT | +PX6-064-CS | 5'10"x 3'11" | 1/3 hp | 98 cu. ft. | 1.0 | 8.4 | 707 |
| 6x6x6 | PX6-066-CT | PX6-066-CS | 5'10"x 5'10" | 1/2 hp | 156 cu. ft. | 1.0 | 9.9 | 821 |
| 6x8x6 | PX6-068-CT | PX6-068-CS | 5'10"x 7'9" | 1/2 hp | 213 cu. ft. | 1.0 | 9.9 | 921 |
| 6x10x6 | PX6-610-CT | PX6-0610-CS | 5'10"x 9'8" | 3/4 hp | 271 cu. ft. | 2.0 | 16.3 | 1064 |
| 6x12x6 | PX6-612-CT | PX6-0612-CS | 5'10"x 11'7" | 3/4 hp | 332 cu. ft. | 2.0 | 16.3 | 1146 |
| 8x6x6 | PX6-086-CT | PX6-086-CS | 7'9" x 5'10" | 1/2 hp | 80 cu. ft. | 1.0 | 9.9 | 977 |
| 8x8x6 | PX6-088-CT | PX6-088-CS | 7'9" x 7'9" | 3/4 hp | 293 cu. ft. | 2.0 | 16.3 | 1069 |
| 8x10x6 | PX6-810-CT | PX6-0810-CS | 7'9" x 9'8" | 3/4 hp | 372 cu. ft. | 2.0 | 16.3 | 1183 |
| 8x12x6 | PX6-812-CT | PX6-0812-CS | 7'9" x 11'7" | 1 hp | 455 cu. ft. | 2.0 | 16.8 | 1253 |
| 10x6x6 | PX6-106-CT | PX6-106-CS | 9'8" x 5'10" | 3/4 hp | 271 cu. ft. | 2.0 | 16.3 | 1064 |
| 10x8x6 | PX6-108-CT | PX6-108-CS | 9'8" x 7'9" | 3/4 hp | 372 cu. ft. | 2.0 | 16.3 | 1183 |
| 10x10x6 | PX6-1010-CT | PX6-1010-CS | 9'8" x 9'8" | 3/4 hp | 477 cu. ft. | 2.0 | 16.3 | 1442 |
| 12x6x6 | PX6-126-CT | PX6-126-CS | 11'7" x 5'10" | 3/4 hp | 332 cu. ft. | 2.0 | 16.3 | 1236 |
| 12x8x6 | PX6-128-CT | PX6-128-CS | 11'7" x 7'9" | 1 hp | 455 cu. ft. | 2.0 | 16.8 | 1346 |

7' Polar-Pak Coolers & Freezers**Coolers: 38°F - 7' 6-1/4" High - Door 26x78**

| <u>With Floor</u> | <u>Top Mount Model</u> | <u>Side Mount Model</u> | <u>Actual Size</u> | <u>Compressor</u> | <u>Capacity</u> | <u>Fans</u> | <u>Amps</u> | <u>Ship Weight</u> |
|-------------------|------------------------|-------------------------|--------------------|-------------------|-----------------|-------------|-------------|--------------------|
| 5x4x7 | P7-054-CT | +P7-054-CS | 4'10-1/2"x 3'11" | 1/3 hp | 84 cu. ft. | 1.0 | 8.4 | 1013 |
| 6x4x7 | P7-064-CT | +P7-064-CS | 5'10"x 3'11" | 1/3 hp | 116 cu. ft. | 1.0 | 8.4 | 1013 |
| 6x6x7 | P7-066-CT | P7-066-CS | 5'10"x 5'10" | 1/2 hp | 184 cu. ft. | 1.0 | 9.9 | 1013 |
| 6x8x7 | P7-068-CT | P7-068-CS | 5'10"x 7'9" | 1/2 hp | 252 cu. ft. | 1.0 | 9.9 | 1169 |
| 6x10x7 | P7-0610-CT | P7-0610-CS | 5'10"x 9'8" | 3/4 hp | 320 cu. ft. | 2.0 | 16.3 | 1368 |
| 6x12x7 | P7-0612-CT | P7-0612-CS | 5'10"x 11'7" | 3/4 hp | 388 cu. ft. | 2.0 | 16.3 | 1524 |
| 8x6x7 | P7-086-CT | P7-086-CS | 7'9" x 5'10" | 1/2 hp | 252 cu. ft. | 1.0 | 9.9 | 1169 |
| 8x8x7 | P7-088-CT | P7-088-CS | 7'9" x 7'9" | 3/4 hp | 345 cu. ft. | 2.0 | 16.3 | 1391 |
| 8x10x7 | P7-0810-CT | P7-0810-CS | 7'9" x 9'8" | 3/4 hp | 439 cu. ft. | 2.0 | 16.3 | 1573 |
| 8x12x7 | P7-0812-CT | P7-0812-CS | 7'9" x 11'7" | 1 hp | 532 cu. ft. | 2.0 | 16.8 | 1762 |
| 10x6x7 | P7-106-CT | P7-106-CS | 9'8" x 5'10" | 3/4 hp | 320 cu. ft. | 2.0 | 16.3 | 1368 |
| 10x8x7 | P7-108-CT | P7-108-CS | 9'8" x 7'9" | 3/4 hp | 439 cu. ft. | 2.0 | 16.3 | 1573 |
| 10x10x7 | P7-1010-CT | P7-1010-CS | 9'8" x 9'8" | 1 hp | 558 cu. ft. | 2.0 | 16.8 | 1790 |
| 12x6x7 | P7-126-CT | P7-126-CS | 11'7" x 5'10" | 3/4 hp | 388 cu. ft. | 2.0 | 16.3 | 1524 |
| 12x8x7 | P7-128-CT | P7-128-CS | 11'7" x 7'9" | 1 hp | 532 cu. ft. | 2.0 | 16.8 | 1762 |

Freezer: -10°F - 7' 6-1/4" High - Door 26x78

| <u>With Floor</u> | <u>Top Mount Model</u> | <u>Side Mount Model</u> | <u>Actual Size</u> | <u>Compressor</u> | <u>Capacity</u> | <u>Fans</u> | <u>Amps</u> | <u>Ship Weight</u> |
|-------------------|------------------------|-------------------------|--------------------|-------------------|-----------------|-------------|-------------|--------------------|
| 5x4x7 | P7-054-FT | +P7-054-FS | 4'10-1/2"x 3'11" | 1 hp | 84 cu. ft. | 1.0 | 10.6 | 1013 |
| 6x4x7 | P7-064-FT | +P7-064-FS | 5'10"x 3'11" | 1 hp | 116 cu. ft. | 1.0 | 10.6 | 1013 |
| 6x6x7 | P7-066-FT | P7-066-FS | 5'10"x 5'10" | 1 hp | 184 cu. ft. | 1.0 | 10.6 | 1113 |
| 6x8x7 | P7-068-FT | P7-068-FS | 5'10"x 7'9" | 1 1/2 hp | 252 cu. ft. | 2.0 | 13.5 | 1269 |
| 6x10x7 | P7-0610-FT | P7-0610-FS | 5'10"x 9'8" | 1 1/2 hp | 320 cu. ft. | 2.0 | 13.5 | 1433 |
| 6x12x7 | P7-0612-FT | P7-0612-FS | 5'10"x 11'7" | 1 1/2 hp | 388 cu. ft. | 2.0 | 13.5 | 1524 |
| 8x6x7 | P7-086-FT | P7-086-FS | 7'9" x 5'10" | 1 1/2 hp | 252 cu. ft. | 2.0 | 13.5 | 1269 |
| 8x8x7 | P7-088-FT | P7-088-FS | 7'9" x 7'9" | 1 1/2 hp | 345 cu. ft. | 2.0 | 13.5 | 1456 |
| 8x10x7 | P7-0810-FT | P7-0810-FS | 7'9" x 9'8" | 2 hp | 439 cu. ft. | 2.0 | 18.8 | 1573 |
| 8x12x7 | P7-0812-FT | P7-0812-FS | 7'9" x 11'7" | 2 hp | 532 cu. ft. | 2.0 | 18.8 | 1762 |
| 10x6x7 | P7-106-FT | P7-106-FS | 9'8" x 5'10" | 1 1/2 hp | 320 cu. ft. | 2.0 | 13.5 | 1433 |
| 10x8x7 | P7-108-FT | P7-108-FS | 9'8" x 7'9" | 2 hp | 439 cu. ft. | 2.0 | 18.8 | 1638 |
| 10x10x7 | P7-1010-FT | P7-1010-FS | 9'8" x 9'8" | 2 hp | 558 cu. ft. | 2.0 | 18.8 | 1790 |
| 12x6x7 | P7-126-FT | P7-126-FS | 11'7" x 5'10" | 1 1/2 hp | 388 cu. ft. | 2.0 | 13.5 | 1524 |
| 12x8x7 | P7-128-FT | P7-128-FS | 11'7" x 7'9" | 2 hp | 532 cu. ft. | 2.0 | 18.8 | 1762 |

Coolers: 38°F - 7' 6-1/4" High - Door 26x78


| <u>Floorless</u> | <u>Top Mount Model</u> | <u>Side Mount Model</u> | <u>Actual Size</u> | <u>Compressor</u> | <u>Capacity</u> | <u>Fans</u> | <u>Amps</u> | <u>Ship Weight</u> |
|------------------|------------------------|-------------------------|--------------------|-------------------|-----------------|-------------|-------------|--------------------|
| 5x4x7 | PX7-054-CT | +PX7-054-CS | 4'10-1/2"x 3'11" | 1/3 hp | 84 cu. ft. | 1.0 | 8.4 | 869 |
| 6x4x7 | PX7-064-CT | +PX7-064-CS | 5'10"x 3'11" | 1/2 hp | 116 cu. ft. | 1.0 | 9.9 | 869 |
| 6x6x7 | PX7-066-CT | PX7-066-CS | 5'10"x 5'10" | 1/2 hp | 184 cu. ft. | 1.0 | 9.9 | 869 |
| 6x8x7 | PX7-068-CT | PX7-068-CS | 5'10"x 7'9" | 3/4 hp | 252 cu. ft. | 2.0 | 16.3 | 977 |
| 6x10x7 | PX7-0610-CT | PX7-0610-CS | 5'10"x 9'8" | 3/4 hp | 320 cu. ft. | 2.0 | 16.3 | 1128 |
| 6x12x7 | PX7-0612-CT | PX7-0612-CS | 5'10"x 11'7" | 3/4 hp | 388 cu. ft. | 2.0 | 16.3 | 1236 |
| 8x6x7 | PX7-086-CT | PX7-086-CS | 7'9" x 5'10" | 3/4 hp | 252 cu. ft. | 2.0 | 16.3 | 977 |
| 8x8x7 | PX7-088-CT | PX7-088-CS | 7'9" x 7'9" | 3/4 hp | 345 cu. ft. | 2.0 | 16.3 | 1135 |
| 8x10x7 | PX7-0810-CT | PX7-0810-CS | 7'9" x 9'8" | 1 hp | 439 cu. ft. | 2.0 | 16.8 | 1253 |
| 8x12x7 | PX7-0812-CT | PX7-0812-CS | 7'9" x 11'7" | 1 hp | 532 cu. ft. | 2.0 | 16.8 | 1346 |
| 10x6x7 | PX7-106-CT | PX7-106-CS | 9'8" x 5'10" | 3/4 hp | 320 cu. ft. | 2.0 | 16.3 | 1128 |
| 10x8x7 | PX7-108-CT | PX7-108-CS | 9'8" x 7'9" | 1 hp | 439 cu. ft. | 2.0 | 16.8 | 1253 |
| 10x10x7 | PX7-1010-CT | PX7-1010-CS | 9'8" x 9'8" | 1 hp | 558 cu. ft. | 2.0 | 16.8 | 1442 |
| 12x6x7 | PX7-126-CT | PX7-126-CS | 11'7" x 5'10" | 3/4 hp | 388 cu. ft. | 2.0 | 16.3 | 1236 |
| 12x8x7 | PX7-128-CT | PX7-128-CS | 11'7" x 7'9" | 1 hp | 532 cu. ft. | 2.0 | 16.8 | 1346 |

Polar-Pak System

by Kolpak

Quick-Ship Program Units

The following Polar-Pak units are available under the "Quick-Ship" program.
 QS Models Ship in 48-Hours.

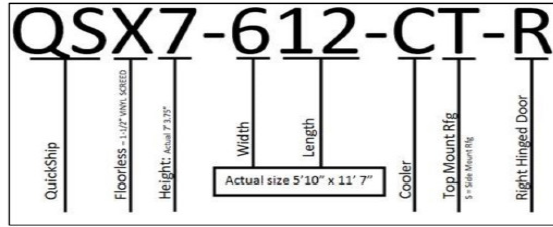

General Specifications:

Interior finish: 26 gauge embossed galvalume
 Exterior finish: 26 gauge embossed galvalume
 Interior floors: ERA .100 smooth aluminum
 Insulation: 4" 100% foamed-in place polyurethane
 Thermometer: 2" Dial Thermometer

- ! 1: Add "R" or "L" to end of Model Numbers above to designate Right or Left Door Hinge.
- ! 2: "+" Refrigeration must be on 5 ft. wall
- ! 3: Mount refrigeration only for quick ship program. Actual height for units without floors is 6' 3 3/4". Actual height for units with floors is 6' 6 1/4". 26 x 66 door, : or left hinged, no options. 26 gauge Stucco Embossed Galvalume Steel, interior and exterior. Outdoor units not available as Quick Ship.

6' Quick-Ship Polar-Paks Coolers & Freezers

Coolers: 38°F - 6'-6-1/4" High

| With Floor | Model | Actual Size | Capacity | Model | Fans | Compressor | Amps | Electrical | Ship Weight |
|------------|-------------|------------------|-------------|---------|------|------------|------|------------|-------------|
| 5x4x6 | QS6-054-CT | 4'10-1/2"x 3'11" | 80 cu. ft. | PC039T2 | 1 | 1/3 hp | 8.4 | 115/60/1 | 742 |
| 6x4x6 | QS6-064-CT | 5'10"x 3'11" | 98 cu. ft. | PC039T2 | 1 | 1/3 hp | 8.4 | 115/60/1 | 879 |
| 6x6x6 | QS6-066-CT | 5'10"x 5'10" | 156 cu. ft. | PC049T2 | 1 | 1/2 hp | 9.9 | 115/60/1 | 1065 |
| 6x8x6 | QS6-068-CT | 5'10"x 7'9" | 213 cu. ft. | PC049T2 | 1 | 1/2 hp | 9.9 | 115/60/1 | 1113 |
| 6x10x6 | QS6-0610-CT | 5'10"x 9'8" | 271 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1304 |
| 6x12x6 | QS6-0612-CT | 5'10"x 11'7" | 332 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1434 |
| 8x6x6 | QS6-086-CT | 7'9" x 5'10" | 80 cu. ft. | PC049T2 | 1 | 1/2 hp | 9.9 | 115/60/1 | 1113 |
| 8x8x6 | QS6-088-CT | 7'9" x 7'9" | 293 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1325 |
| 8x10x6 | QS6-0810-CT | 7'9" x 9'8" | 372 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1503 |
| 8x12x6 | QS6-0812-CT | 7'9" x 11'7" | 455 cu. ft. | PC099T2 | 2 | 1 hp | 16.8 | 115/60/1 | 1662 |
| 10x6x6 | QS6-106-CT | 9'8" x 5'10" | 271 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1304 |
| 10x8x6 | QS6-108-CT | 9'8" x 7'9" | 372 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1503 |
| 10x10x6 | QS6-1010-CT | 9'8" x 9'8" | 477 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1690 |
| 12x6x6 | QS6-126-CT | 11'7" x 5'10" | 332 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1434 |
| 12x8x6 | QS6-128-CT | 11'7" x 7'9" | 455 cu. ft. | PC099T2 | 2 | 1 hp | 16.8 | 115/60/1 | 1662 |

Freezers -10°F - 6'-6-1/4" High

| With Floor | Model | Actual Size | Capacity | Model | Fans | Compressor | Amps | Electrical | Ship Weight |
|------------|-------------|------------------|-------------|---------|------|------------|------|--------------|-------------|
| 5x4x6 | QS6-054-FT | 4'10-1/2"x 3'11" | 80 cu. ft. | PF094T3 | 1 | 1 hp | 10.6 | 208-230/60/1 | 879 |
| 6x4x6 | QS6-064-FT | 5'10"x 3'11" | 98 cu. ft. | PF094T3 | 1 | 1 hp | 10.6 | 208-230/60/1 | 903 |
| 6x6x6 | QS6-066-FT | 5'10"x 5'10" | 156 cu. ft. | PF094T3 | 1 | 1 hp | 10.6 | 208-230/60/1 | 1065 |
| 6x8x6 | QS6-068-FT | 5'10"x 7'9" | 213 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1213 |
| 6x10x6 | QS6-0610-FT | 5'10"x 9'8" | 271 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1369 |
| 6x12x6 | QS6-0612-FT | 5'10"x 11'7" | 332 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1434 |
| 8x6x6 | QS6-086-FT | 7'9" x 5'10" | 80 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1213 |
| 8x8x6 | QS6-088-FT | 7'9" x 7'9" | 293 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1390 |
| 8x10x6 | QS6-0810-FT | 7'9" x 9'8" | 372 cu. ft. | PF194T3 | 2 | 2 hp | 18.8 | 208-230/60/1 | 1568 |
| 8x12x6 | QS6-0812-FT | 7'9" x 11'7" | 455 cu. ft. | PF194T3 | 2 | 2 hp | 18.8 | 208-230/60/1 | 1662 |
| 10x6x6 | QS6-106-FT | 9'8" x 5'10" | 271 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1369 |
| 10x8x6 | QS6-108-FT | 9'8" x 7'9" | 372 cu. ft. | PF194T3 | 2 | 2 hp | 18.8 | 208-230/60/1 | 1568 |
| 10x10x6 | QS6-1010-FT | 9'8" x 9'8" | 477 cu. ft. | PF194T3 | 2 | 2 hp | 18.8 | 208-230/60/1 | 1690 |
| 12x6x6 | QS6-126-FT | 11'7" x 5'10" | 332 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1434 |
| 12x8x6 | QS6-128-FT | 11'7" x 7'9" | 455 cu. ft. | PF194T3 | 2 | 2 hp | 18.8 | 208-230/60/1 | 1662 |

Coolers: 38°F - 6'-3-3/4" High

| Floorless | Model | Actual Size | Capacity | Model | Fans | Compressor | Amps | Electrical | Ship Weight |
|-----------|--------------|------------------|-------------|---------|------|------------|------|------------|-------------|
| 5x4x6 | QSX6-054-CT | 4'10-1/2"x 3'11" | 80 cu. ft. | PC039T2 | 1 | 1/3 hp | 8.4 | 115/60/1 | 662 |
| 6x4x6 | QSX6-064-CT | 5'10"x 3'11" | 98 cu. ft. | PC039T2 | 1 | 1/3 hp | 8.4 | 115/60/1 | 707 |
| 6x6x6 | QSX6-066-CT | 5'10"x 5'10" | 156 cu. ft. | PC049T2 | 1 | 1/2 hp | 9.9 | 115/60/1 | 821 |
| 6x8x6 | QSX6-068-CT | 5'10"x 7'9" | 213 cu. ft. | PC049T2 | 1 | 1/2 hp | 9.9 | 115/60/1 | 921 |
| 6x10x6 | QSX6-0610-CT | 5'10"x 9'8" | 271 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1064 |
| 6x12x6 | QSX6-0612-CT | 5'10"x 11'7" | 332 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1146 |
| 8x6x6 | QSX6-086-CT | 7'9" x 5'10" | 80 cu. ft. | PC049T2 | 1 | 1/2 hp | 9.9 | 115/60/1 | 977 |
| 8x8x6 | QSX6-088-CT | 7'9" x 7'9" | 293 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1069 |
| 8x10x6 | QSX6-0810-CT | 7'9" x 9'8" | 372 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1183 |
| 8x12x6 | QSX6-0812-CT | 7'9" x 11'7" | 455 cu. ft. | PC099T2 | 2 | 1 hp | 16.8 | 115/60/1 | 1253 |
| 10x6x6 | QSX6-106-CT | 9'8" x 5'10" | 271 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1064 |
| 10x8x6 | QSX6-108-CT | 9'8" x 7'9" | 372 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1183 |
| 10x10x6 | QSX6-1010-CT | 9'8" x 9'8" | 477 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1442 |
| 12x6x6 | QSX6-126-CT | 11'7" x 5'10" | 332 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1236 |
| 12x8x6 | QSX6-128-CT | 11'7" x 7'9" | 455 cu. ft. | PC099T2 | 2 | 1 hp | 16.8 | 115/60/1 | 1346 |

7' Quick-Ship Polar-Paks Coolers & Freezers

Coolers: 38°F - 7'-6-1/4" High

| <u>With Floor</u> | <u>Model</u> | <u>Actual Size</u> | <u>Capacity</u> | <u>Model</u> | <u>Fans</u> | <u>Compressor</u> | <u>Amps</u> | <u>Electrical</u> | <u>Ship Weight</u> |
|-------------------|--------------|--------------------|-----------------|--------------|-------------|-------------------|-------------|-------------------|--------------------|
| 5x4x7 | QS7-054-CT | 4'10-1/2"x 3'11" | 84 cu. ft. | PC039T2 | 1 | 1/3 hp | 8.4 | 115/60/1 | 1013 |
| 6x4x7 | QS7-064-CT | 5'10"x 3'11" | 116 cu. ft. | PC039T2 | 1 | 1/3 hp | 8.4 | 115/60/1 | 1013 |
| 6x6x7 | QS7-066-CT | 5'10"x 5'10" | 184 cu. ft. | PC049T2 | 1 | 1/2 hp | 9.9 | 115/60/1 | 1013 |
| 6x8x7 | QS7-068-CT | 5'10"x 7'9" | 252 cu. ft. | PC049T2 | 1 | 1/2 hp | 9.9 | 115/60/1 | 1169 |
| 6x10x7 | QS7-0610-CT | 5'10"x 9'8" | 320 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1368 |
| 6x12x7 | QS7-0612-CT | 5'10"x 11'7" | 388 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1524 |
| 8x6x7 | QS7-086-CT | 7'9" x 5'10" | 252 cu. ft. | PC049T2 | 1 | 1/2 hp | 9.9 | 115/60/1 | 1169 |
| 8x8x7 | QS7-088-CT | 7'9" x 7'9" | 345 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1391 |
| 8x10x7 | QS7-0810-CT | 7'9" x 9'8" | 439 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1573 |
| 8x12x7 | QS7-0812-CT | 7'9" x 11'7" | 532 cu. ft. | PC099T2 | 2 | 1 hp | 16.8 | 115/60/1 | 1762 |
| 10x6x7 | QS7-106-CT | 9'8" x 5'10" | 320 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1368 |
| 10x8x7 | QS7-108-CT | 9'8" x 7'9" | 439 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1573 |
| 10x10x7 | QS7-1010-CT | 9'8" x 9'8" | 558 cu. ft. | PC099T2 | 2 | 1 hp | 16.8 | 115/60/1 | 1790 |
| 12x6x7 | QS7-126-CT | 11'7" x 5'10" | 388 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1524 |
| 12x8x7 | QS7-128-CT | 11'7" x 7'9" | 532 cu. ft. | PC099T2 | 2 | 1 hp | 16.8 | 115/60/1 | 1762 |

Freezers -10°F - 7'-6-1/4" High

| <u>With Floor</u> | <u>Model</u> | <u>Actual Size</u> | <u>Capacity</u> | <u>Model</u> | <u>Fans</u> | <u>Compressor</u> | <u>Amps</u> | <u>Electrical</u> | <u>Ship Weight</u> |
|-------------------|--------------|--------------------|-----------------|--------------|-------------|-------------------|-------------|-------------------|--------------------|
| 5x4x7 | QS7-054-FT | 4'10-1/2"x 3'11" | 84 cu. ft. | PF094T3 | 1 | 1 hp | 10.6 | 208-230/60/1 | 1013 |
| 6x4x7 | QS7-064-FT | 5'10"x 3'11" | 116 cu. ft. | PF094T3 | 1 | 1 hp | 10.6 | 208-230/60/1 | 1013 |
| 6x6x7 | QS7-066-FT | 5'10"x 5'10" | 184 cu. ft. | PF094T3 | 1 | 1 hp | 10.6 | 208-230/60/1 | 1113 |
| 6x8x7 | QS7-068-FT | 5'10"x 7'9" | 252 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1269 |
| 6x10x7 | QS7-0610-FT | 5'10"x 9'8" | 320 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1433 |
| 6x12x7 | QS7-0612-FT | 5'10"x 11'7" | 388 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1524 |
| 8x6x7 | QS7-086-FT | 7'9" x 5'10" | 252 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1269 |
| 8x8x7 | QS7-088-FT | 7'9" x 7'9" | 345 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1456 |
| 8x10x7 | QS7-0810-FT | 7'9" x 9'8" | 439 cu. ft. | PF194T3 | 2 | 2 hp | 18.8 | 208-230/60/1 | 1573 |
| 8x12x7 | QS7-0812-FT | 7'9" x 11'7" | 532 cu. ft. | PF194T3 | 2 | 2 hp | 18.8 | 208-230/60/1 | 1762 |
| 10x6x7 | QS7-106-FT | 9'8" x 5'10" | 320 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1433 |
| 10x8x7 | QS7-108-FT | 9'8" x 7'9" | 439 cu. ft. | PF194T3 | 2 | 2 hp | 18.8 | 208-230/60/1 | 1638 |
| 10x10x7 | QS7-1010-FT | 9'8" x 9'8" | 558 cu. ft. | PF194T3 | 2 | 2 hp | 18.8 | 208-230/60/1 | 1790 |
| 12x6x7 | QS7-126-FT | 11'7" x 5'10" | 388 cu. ft. | PF144T3 | 2 | 1 1/2 hp | 13.5 | 208-230/60/1 | 1524 |
| 12x8x7 | QS7-128-FT | 11'7" x 7'9" | 532 cu. ft. | PF194T3 | 2 | 2 hp | 18.8 | 208-230/60/1 | 1762 |

Coolers: 38°F - 7'-3-3/4" High

| <u>Floorless</u> | <u>Model</u> | <u>Actual Size</u> | <u>Capacity</u> | <u>Model</u> | <u>Fans</u> | <u>Compressor</u> | <u>Amps</u> | <u>Electrical</u> | <u>Ship Weight</u> |
|------------------|--------------|--------------------|-----------------|--------------|-------------|-------------------|-------------|-------------------|--------------------|
| 5x4x7 | QSX7-054-CT | 4'10-1/2"x 3'11" | 84 cu. ft. | PC039T2 | 1 | 1/3 hp | 8.4 | 115/60/1 | 869 |
| 6x4x7 | QSX7-064-CT | 5'10"x 3'11" | 116 cu. ft. | PC049T2 | 1 | 1/2 hp | 9.9 | 115/60/1 | 869 |
| 6x6x7 | QSX7-066-CT | 5'10"x 5'10" | 184 cu. ft. | PC049T2 | 1 | 1/2 hp | 9.9 | 115/60/1 | 869 |
| 6x8x7 | QSX7-068-CT | 5'10"x 7'9" | 252 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 977 |
| 6x10x7 | QSX7-0610-CT | 5'10"x 9'8" | 320 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1128 |
| 6x12x7 | QSX7-0612-CT | 5'10"x 11'7" | 388 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1236 |
| 8x6x7 | QSX7-086-CT | 7'9" x 5'10" | 252 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 977 |
| 8x8x7 | QSX7-088-CT | 7'9" x 7'9" | 345 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1135 |
| 8x10x7 | QSX7-0810-CT | 7'9" x 9'8" | 439 cu. ft. | PC099T2 | 2 | 1 hp | 16.8 | 115/60/1 | 1253 |
| 8x12x7 | QSX7-0812-CT | 7'9" x 11'7" | 532 cu. ft. | PC099T2 | 2 | 1 hp | 16.8 | 115/60/1 | 1346 |
| 10x6x7 | QSX7-106-CT | 9'8" x 5'10" | 320 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1128 |
| 10x8x7 | QSX7-108-CT | 9'8" x 7'9" | 439 cu. ft. | PC099T2 | 2 | 1 hp | 16.8 | 115/60/1 | 1253 |
| 10x10x7 | QSX7-1010-CT | 9'8" x 9'8" | 558 cu. ft. | PC099T2 | 2 | 1 hp | 16.8 | 115/60/1 | 1442 |
| 12x6x7 | QSX7-126-CT | 11'7" x 5'10" | 388 cu. ft. | PC069T2 | 2 | 3/4 hp | 16.3 | 115/60/1 | 1236 |
| 12x8x7 | QSX7-128-CT | 11'7" x 7'9" | 532 cu. ft. | PC099T2 | 2 | 1 hp | 16.8 | 115/60/1 | 1346 |