

# PCBT60-24G 60" 6 Open Burner Gas Restaurant Range w/ 24" Raised Griddle/Broiler and 2 Space-Saver Ovens

MODEL: PCBT60-24G

DESCRIPTION: GAS RANGE W/ RAISED GRIDDLE/BROILER & 2 SPACE-SAVER OVENS  
TOTAL BTU/HR: 295,000

EXTERIOR SIZE (WDH): 60"x 33.125"x57.5"

OVEN INTERIOR SIZE (WDH): 14.33"x26.25"x27"

PACKING SIZE (WDH): 67"x 45"x51" / CUBIC FT 72

G/W (LB): 1095

ENTRY CLEARANCE: CRATED 46" / UNCRATED 34"

INPUT RATING PER BURNER TYPE:

OPEN BURNERS: BTU 30,000 (KW 8.79)

GRIDDLE/BROILER: BTU 15,000 (KW 4.39)

5/8" (16 MM) THICK POLISHED STEEL PLATE

GRIDDLE WORKING DEPTH: 21.5" (546 MM)

SPATULA WIDTH GREASE TROUGH

ONE HEAVY DUTY 20,000 BTU (5.86 kW)

"H" BURNER PER 12" SECTION

EACH 12" SECTION IS CONTROLLED

BY A VALVE OR A THERMOSTAT

MANUAL CONTROL STANDARD

LARGE CAPACITY GREASE CONTAINER W/ INTEGRAL LID

## FEATURES

- STAINLESS STEEL EXTERIOR W/ SINGLE DECK HIGH SHELF
- 4 CAST IRON OPEN BURNER (30,000 BTU/HR EACH)
  - 6" (152.5 MM) ADJUSTABLE LEGS
- 5" (127 MM) STAINLESS STEEL FRONT RAIL
- SPILL-PROOF PILOT IGNITION SYSTEM

- CONTROLLED BY A BRASS VALVE W/ INFINITE ADJUSTMENT
  - GAS PRESSURE REGULATOR

• HEAVY GAUGE WELDED FRAME CONSTRUCTION

• ALUMINIZED OVEN INTERIOR. STAINLESS STEEL INNER DOOR PANEL AND REMOVABLE OVEN BOTTOM

• SPACE-SAVER OVEN DIMENSIONS (WDH) 20.25"x27"x14.3125"

• REMOVABLE CHROME PLATED OVEN SIDE RACKS, ON RANGE-BASED CONVECTION OVEN ONLY
 

- ONE CHROME PLATED OVEN RACK.

• RIBBED OVEN DOOR FOR ADDED STRENGTH

• THERMOSTAT IS ADJUSTABLE FROM 150° F TO 500° F


• HEAVY DUTY STRAIGHT TUBE BURNER (27,000 BTU's / 7.91 kW)

• PUSH BUTTON SPARK IGNITER FOR PILOT

• TWO YEAR LIMITED PARTS AND LABOR WARRANTY



## OTHER MODELS AVAILABLE

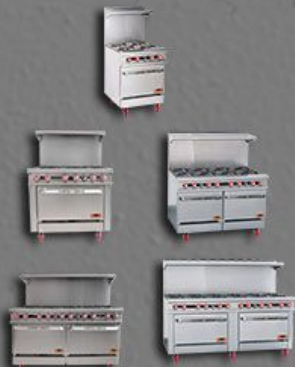

## Installation Instructions

1. A GAS PRESSURE REGULATOR SUPPLIED WITH THE UNIT MUST BE INSTALLED. NATURAL GAS 4.0" (102 MM) W.C. PROPANE GAS 10.0" (254 MM) W.C.
2. AN ADEQUATE VENTILATION SYSTEM IS REQUIRED FOR COMMERCIAL COOKING EQUIPMENT.
3. THESE UNITS ARE MANUFACTURED FOR INSTALLATION IN ACCORDANCE WITH NATIONAL FUEL GAS CODE, ANSI- Z223.1/NFPA #54 (LATEST EDITION).
4. THIS APPLIANCE IS INTENDED FOR COMMERCIAL INSTALLATION ONLY AND IS NOT INTENDED FOR HOME USE.
5. EQUIPMENT CLEARANCE REQUIREMENT:
 

NON-COMBUSTIBLES	COMBUSTIBLES
SIDES 6"	SIDES 4"
BACK 6"	BACK 4"

OPEN BURNER SIDES 12" REAR 6"  
GRIDDLE/BROILER SIDES 6" REAR 6"
6. ALL THE INSTALLATION MUST BE PERFORMED BY QUALIFIED TECHNICIANS.
7. FOR GAS CONVERSION, PLEASE REFER TO CONVERSION INSTRUCTIONS IN THE INSTRUCTION MANUAL BOOK.

