



## DRIP TRAY

### SURFACE MOUNT SERIES 5" X 24"

- Add European style while creating dispense excitement
- Condition the glass before pouring – invert glass, push down on sprayer for cold water rinsing
- Robust 18 gauge stainless steel construction
- Welded corners, finished smooth for safety and appearance



#### **DP-120D-24GR**

Brushed Stainless Steel




Part No.	Dimensions	Description	Shipping Weight	Box Dimensions
 DP-120D-24GR	5"W x 24"L x 3/4"H	Stainless Steel	TBD	TBD

## Rinser Water Inlet Installation

- Always check local plumbing codes first.
- Install in-line water regulator set at 15 PSI from the street water supply (no greater, perfect operating pressure).
- Install in-line one way check valve from the street water supply (prevents pressure drop which can cause leaking).
- Install in-line shut-off for the rinser system from the street water supply (this must be turned off nightly).
- If teed into soda system make sure system can handle the increased water demand. Have plumber install a 45° 1/2" O.D. barb for the drains if line is not hard plumbed into the system.
- Install a shut-off for the rinser water supply if line is not hard plumbed into the system.

## Dimensions

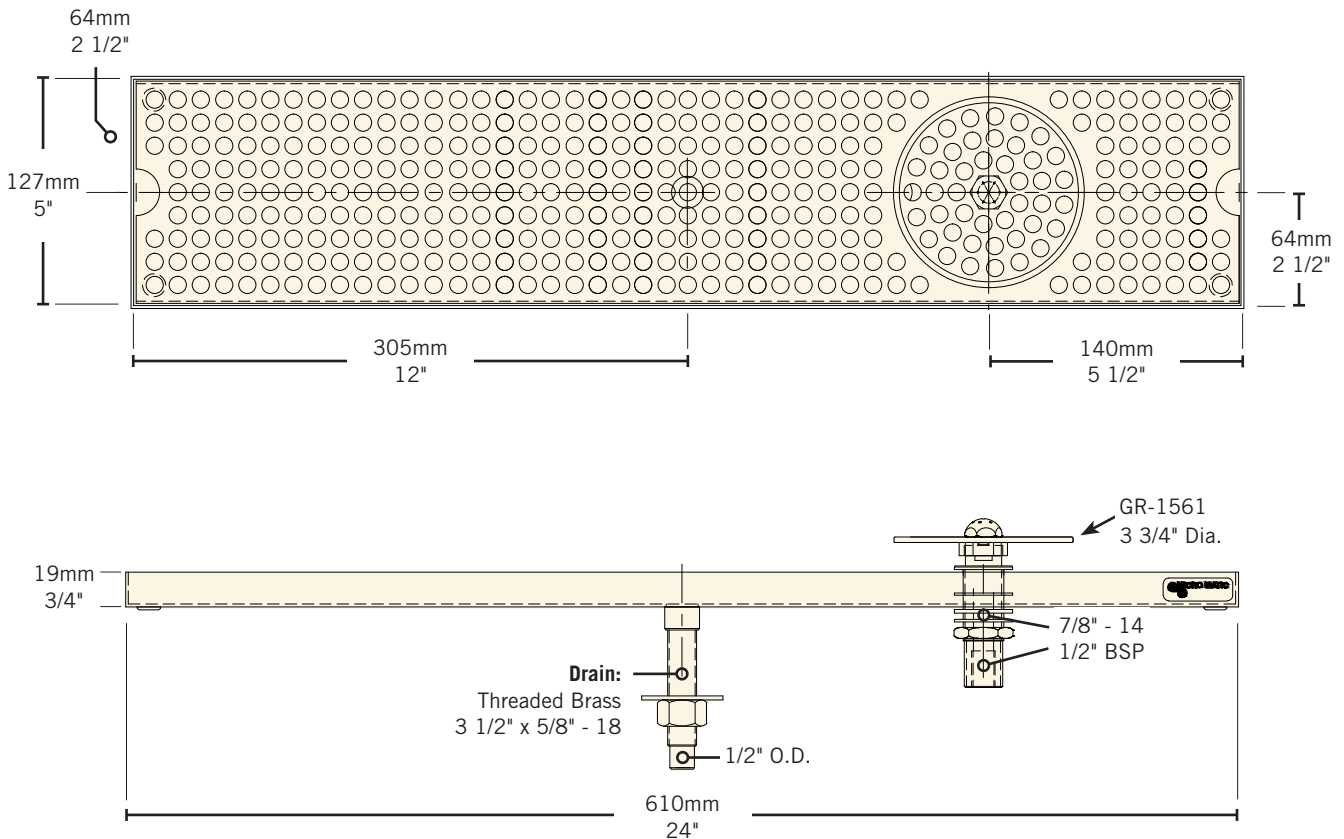

 **MICRO MATIC**  
 Toll-Free: 1-866-327-4159  
[www.micromatic.com](http://www.micromatic.com)

**West**  
 19791 Bahama St.  
 Northridge, CA 91324  
 Tel. (818) 701-9765  
 Fax. (818) 701-9844

**Central**  
 10726 North Second St.  
 Machesney Park, IL 61115  
 Tel. (815) 968-7557  
 Fax. (815) 968-0363

**Southeast**  
 2364 Simon Ct.  
 Brooksville, FL 34604  
 Tel. (352) 799-6331  
 Fax. (352) 796-2429

**Northeast**  
 4601 Saucon Creek Rd.  
 Center Valley, PA 18034  
 Tel. (610) 625-4464  
 Fax. (610) 625-4466