# 24" DEEP SLIDING GLASS DOOR BACK BAR COOLER (STAINLESS STEEL)



# EBB48G-SD-SS





#### **Refrigeration System**

- · Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- · Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- · Full-length air duct ensures optimal cold air circulation.
- · Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- · Large capacity, corrosion-resistant condenser and evaporator coils.
- · Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- · High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning.
- · Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

#### **Cabinet Construction**

- · Heavy duty stainless steel countertop with stainless steel exterior.
- · Open spaced interior with no walls between compartments.
- · Galvanized steel interior walls and high quality stainless steel floor.
- ·13/4" thick high density polyurethane insulation.
- · Built-in caster thread receptacles.

## Lighting

· Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.



- · Low emissivity double glass panes reflect UV rays for efficient cooling.
- · Gray PVC door frames.
- · Self-closes by weight.
- · Removable doors and stainless steel door tracks make cleaning an easy process.

- · Two epoxy coated, steel wire shelves per section.
- · Height adjustable stainless steel clips.

#### Temperature Control

- · Multi-function digital controller with easy to read LED display.
- · Factory preset temperature, 35°F.
- · Temperature setting range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

- · Additional shelving.
- · 3" or 5" swivel casters with locks.
- · 3.5" 6" height-adjustable and interchangeable legs.





















Туре	Doors	Capacity	12 oz.	12 oz.	Shelves	Refrigerant	НР	Power	Amps	Crated	Exterior Dimensions		
Туре	D0013	Cu. Ft.	Cans	Bottles	Oncives	Kemigerani	•	V-Hz-Ph		Weight	L	D	Н*
REF	2	13	420	294	4	R-290	1/4+	115-60-1	3.5	278 lbs	49"	24.5"	37.25"

# 24" DEEP SLIDING GLASS DOOR BACK BAR COOLER (STAINLESS STEEL)



# EBB48G-SD-SS

# **EBB Series**

# **DIMENSIONAL DATA**

	L	49 in.		
External Dims.	D	24.5 in.		
	H*	37.25 in.		
Crated Weight		278 lbs.		
Doors/Drawers/	2			
Max Weight Sup	-			


## **STORAGE DATA**

Net Capacity Cu. Ft. ▶	13
Shelves	4
Barrels	-
20 oz. Bottles	-
12 oz. Bottles	294
12 oz. Cans	420
8" Mugs	-
# of Pans (Top)	-
# of Pans (Drawer)	-
Dividers	-
Trays	-


# **ELECTRICAL DATA**

Voltage	115-60-1
Full Load Amperage	3.5A
Feed Wires w/ Ground	3
Cord Length	9ft
NEMA Plug Type	(i) NEMA 5-15P

# PLAN VIEW

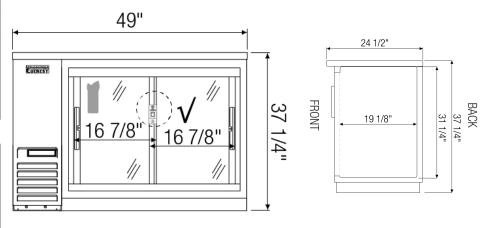

FRONT SIDE

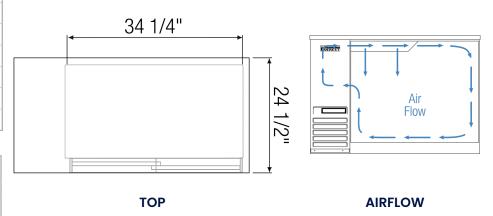

## **REFRIGERATION DATA**

Compressor	Side
Refrigerant	R-290
Compressor HP	1/4+
BTU/HR <sup>†</sup>	1557

# **KEY**

D L H FD SD GD	Door Lid Half Door Full Door Solid Door Glass Door		R REF F FRZ DUAL DR	Refrige Refrige Freezer Freezer REF/FRZ Drawer	,	
		Elevation	Right	Plan	3D	Back
KCL						

# **ACCESSORIES & OPTIONS**

- Additional Shelving
- AJL03-00
- CASA3-01
- CASA5-01
- Contact Everest Refrigeration for more information.
- Interchangeable Leg for Caster (Optional)
- 3" Overall Height Caster Assembly (2) Front (2) Rear
- 5" Overall Height Caster Assembly (2) Front (2) Rear