HORIZONTAL BOTTLE COOLER



EBC65



EBC Series

Refrigeration System

· Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.

· Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.

- · Full-length air duct ensures optimal cold air circulation.
- · Time-initiated and temperature-terminated auto defrost cycle for seamless operation. · Large capacity, corrosion-resistant condenser and evaporator coils.

· Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.

· High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleanina.

· Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Cabinet Construction

· Heavy duty stainless steel countertop and rails with textured laminate, black vinyl exterior.

- · Open spaced interior with no walls between compartments.
- · Galvanized steel interior. $\cdot 13/4$ " thick high density polyurethane insulation.
- · Built-in caster thread receptacles.

Lighting

· Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Bottle Cap Opener

· Front mounted bottle cap opener and tray detach for ease of cleaning.

- · Heavy duty stainless steel exterior and galvanized steel interior.
- · 3/4" thick high density polyurethane insulation.
- · Removable ratchet locks keep your items safe from theft.

Shelving

· Horizontal epoxy coated, steel wire shelves for bottom air circulation (see table for quantity). · Vertical epoxy coated, steel wire bin dividers (see table for quantity).

Temperature Control

- · Multi-function digital controller with easy to read LED display.
- · Factory preset temperature, 35°F.
- · Temperature setting range from 33°F to 54°F.
- · Audible overheat protection alarm for compressor and condenser coil.

Options

- · Additional bin dividers.
- \cdot 3" or 5" swivel casters with locks.
- · 3.5" 6" height-adjustable and interchangeable legs.



Туре	Lids	Cu. Ft.		12 oz.	Dividers	ers Shelves	Refrigerant	HP	Power V-Hz-Ph	Amps	Crated Weight	Exterior Dimensions		
	Lide			Bottles	Dividers 6							L	D	Н*
REF	2	21	780	528	4	2	R-290	1/4+	115-60-1	3.5	285 lbs	64.625"	26.75"	33.75"

(†)Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). () Product capacity is calculated based on standard industry figures. (*) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notic

VER. 8/18/2023

350 in 📓 📓

EVEREST



HORIZONTAL BOTTLE COOLER




EBC Series

DIMENSIONAL DATA

EBC65

	L	64.625 in.		
External Dims.	D	26.75 in.		
	H*	33.75 in.		
Crated Weight		285 lbs.		
Doors/Drawers/I	Lids	2		
Max Weight Supp	port	-		
STORAGE DAT	Α			
Net Capacity Cu.	Ft. 🏲	21		
Shelves		2		
Barrels		-		
20 oz. Bottles		-		
12 oz. Bottles		528		
12 oz. Cans		780		
8" Mugs		-		
# of Pans (Top)		-		
# of Pans (Drawe	er)	-		
Dividers		4		
Trays		-		

64 5/8" 59 7/8" 33 3/4" 48 7/8" té 📼 🗄




FRONT

SIDE

Air

Flow

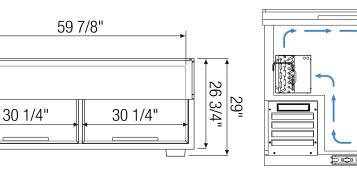

PLAN VIEW

TOP

AIRFLOW

ACCESSORIES & OPTIONS

- Interchangeable Leg for Caster (Optional)
- 24-1/2" x 19-13/16" (622mm x 503mm) Epoxy Coating Bottle Cooler
- 3" Overall Height Caster Assembly (2) Front (2) Rear
- 5" Overall Height Caster Assembly (2) Front (2) Rear

ELECTRICAL DATA

Voltage	115-60-1
Full Load Amperage	3.5A
Feed Wires w/ Ground	3
Cord Length	9ft
NEMA Plug Type	(1) NEMA 5-15P

REFRIGERATION DATA

Compressor	Side	AJL03-00
Refrigerant	R-290	BCP01-01
Compressor HP	1/4+	CASA3-01
BTU/HR [†]	1926	CASA5-01

KFV

L Lic H Ho FD Fu SD Sc		oor 1 11 Door 11 Door 11 Door 11 Door ass Door	R REF F FRZ DUAL DR	Refrige Refrige Freezer Freezer REF/FRZ Drawer)	
		Elevation	Right	Plan	3D	Back
KC	C					

(†) Based on evaporating temperature of 23°F (-5°C) & condensing temperature of 131°F (55°C). () Product capacity is calculated based on standard industry figures. (*) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.

VER. 8/18/2023